


MOUNTING HOLES
.21 (5,4) DIA THRO
TYP (4) PLACES

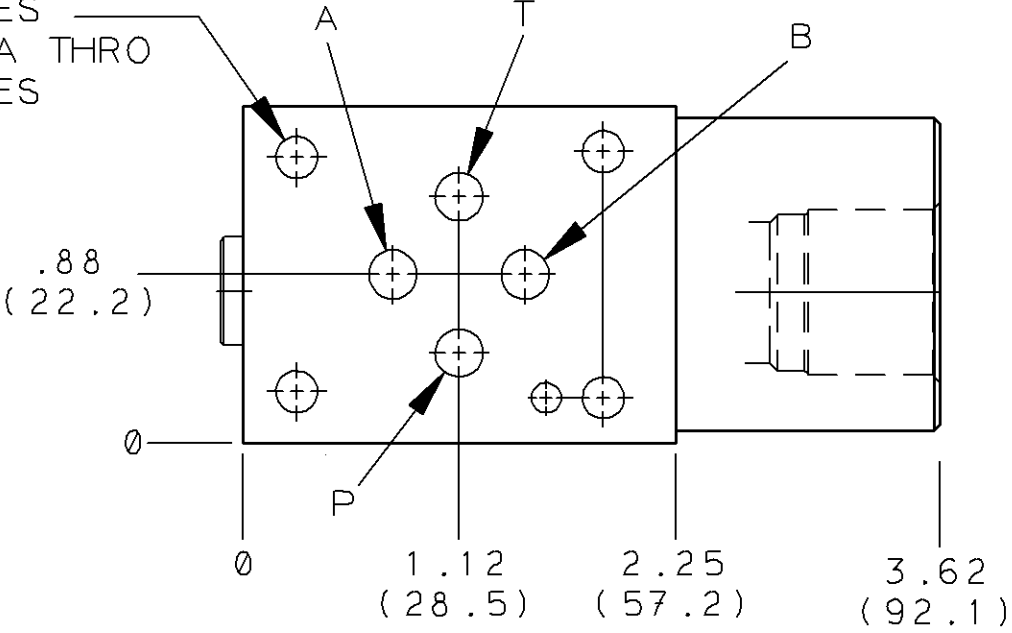





3RD ANGLE
PROJECTION

REVISION

PART NO.
X2Q

REFER TO SUN HYDRAULICS' TECHNICAL
LITERATURE & CATALOGUE FOR DETAILS
OF CARTRIDGE STANDARD SETTINGS,
ADJUSTMENT RANGES, MAXIMUM PRESSURE
RATINGS, SEAL MATERIAL, TORQUE
VALUES, ETC.

GAUGE PORT:
(PLUGGED)

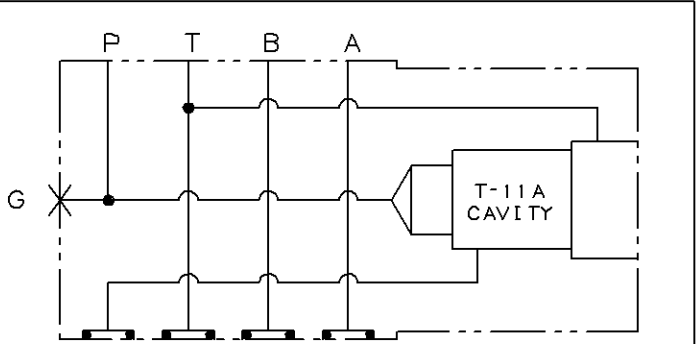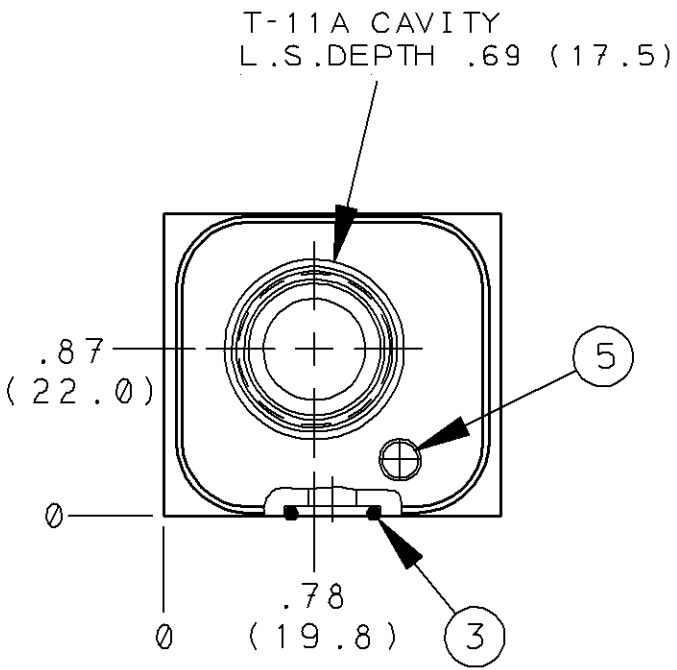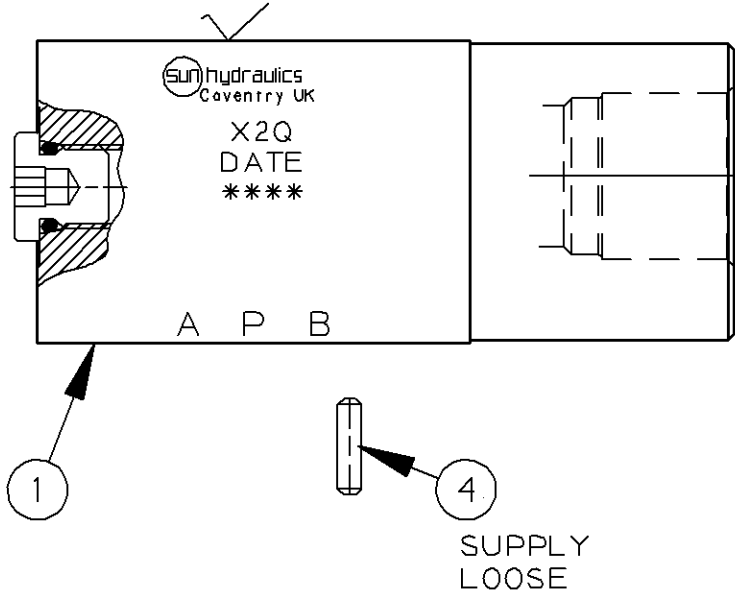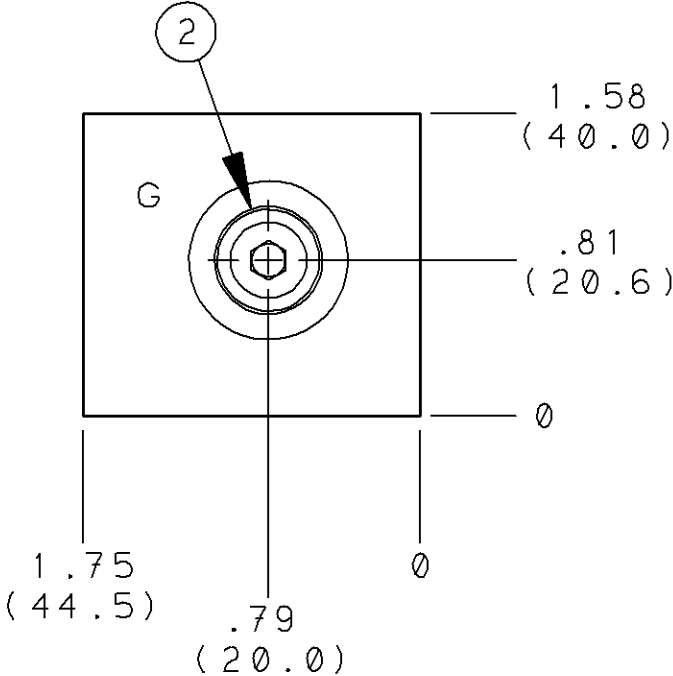

SYMBOL

5	850-004-218	KOENIG PLUG	1
4	811-001-006	PIN	1
3	500-001-012	O-RING SEAL	4
2	A330-006-004	SAE-4 PLUG	1
1	158-769-002	BODY	1
I T E M			Q T Y

OUTLINE & ASS'Y

UNLESS OTHERWISE SPECIFIED

DIMENSION TOL
.X = +/- .030
.XX = +/- .015
.XXX = +/- .005

ANGLE TOL +/- 1°
FINISH V 80
REMOVE ALL BURRS

TITLE
ISO 03 SANDWICH BODY
40mm HIGH
T-11A on P, DRAIN to T (Red/Reliever)

SCALE
1 : 1

SIMILAR TO
W41 + W9V

MATERIAL
ALUMINIUM

HEAT TREAT & FINISH

REVISION

PART NO.
X2Q

SUN hydraulics
LIMITED
WHEELER ROAD, WHITLEY,
COVENTRY, CV3 4LA ENGLAND.
TELEPHONE (01203) 307696

--	ADDED A P & B STAMPING & CAVITY DIMENSIONS	26DEC01	SMS	DSS	
LTR	REVISION	DATE	DRN	CHK	REL