

3RD ANGLE
PROJECTION








REVISION

PART NO.

X2S

NOTES

REFER TO SUN HYDRAULICS
TECHNICAL LITERATURE AND CATALOGUE
FOR DETAILS OF CARTRIDGE STANDARD
SETTINGS, ADJUSTMENT RANGES,
MAXIMUM PRESSURE RATINGS,
SEAL MATERIAL, TORQUE VALUES, ETC.

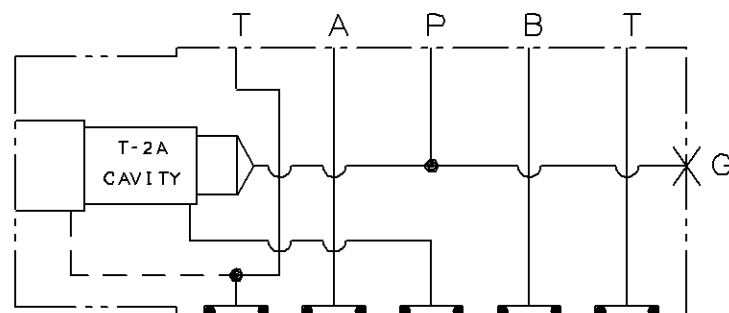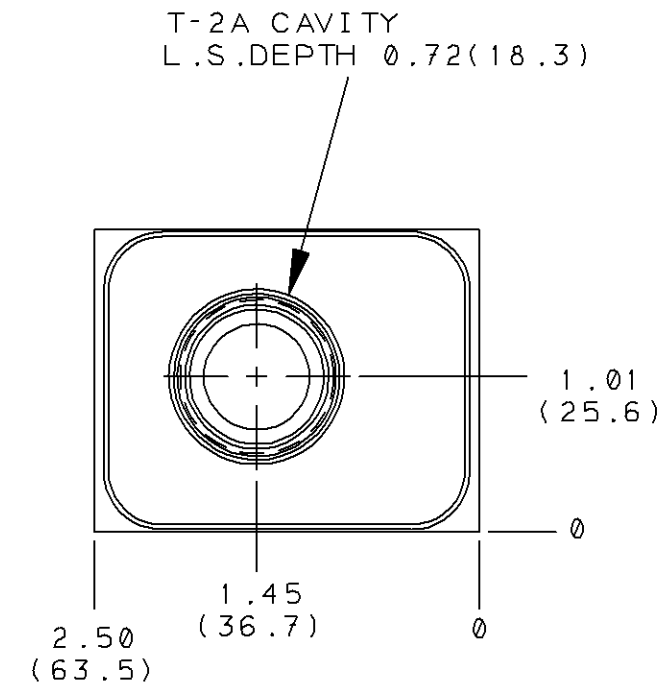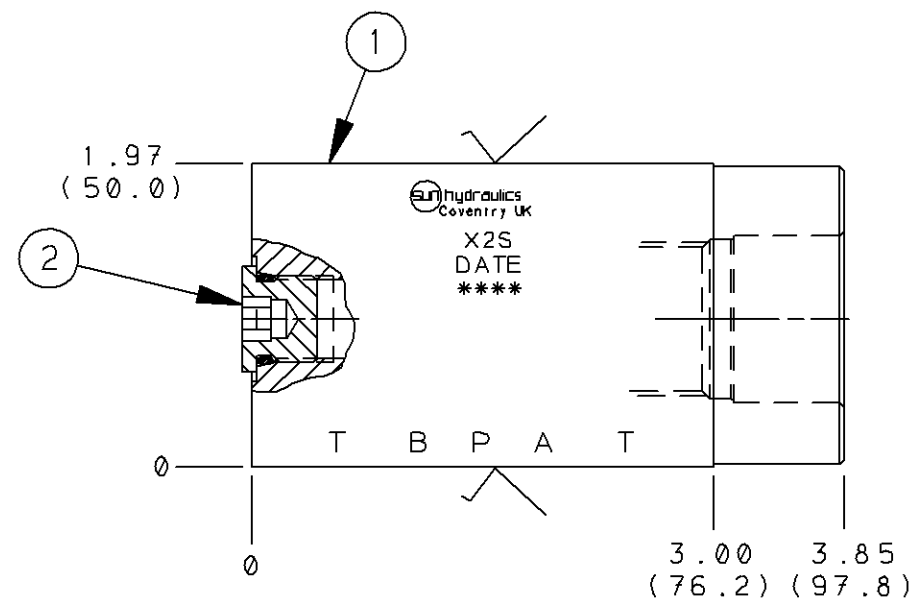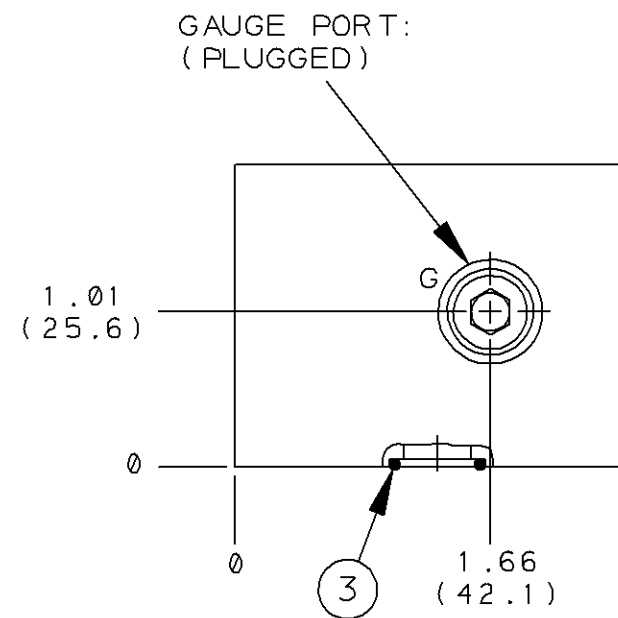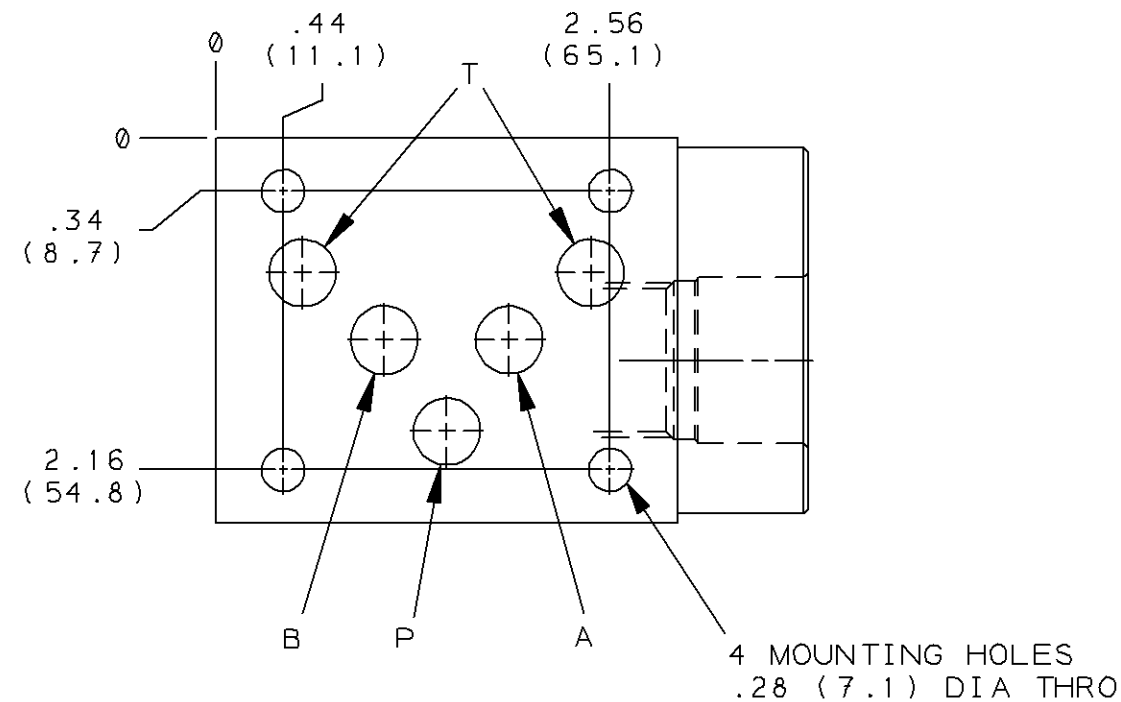

SYMBOL

SEE W4W FOR .250 NPTF PORT
AND W4W/M FOR .250 BSPP PORT.

LET	REVISION	DATE	DRN	CHK	REL
-	REVISED VIEW ORIENTATION FOR STAMPING	02JAN02	SMS	RJB	
-	ADDED A P T & B STAMPING & CAVITY DIMENSIONS	26DEC01	SMS	DSS	

OUTLINE & ASS'Y

UNLESS
OTHERWISE
SPECIFIED

DIMENSION TOL
(INCHES)

.x = ±.030
.xx = ±.015
.xxx = ±.005

ANGLE TOL ±1/2°

FINISH 80 ✓
REMOVE ALL
BURRS

TITLE
ISO 05 SANDWICH BODY -50mm HIGH
T-2A On P Drained to T (Reducer)

CADD
SCALE
1:*

REF.

MATERIAL
ALUMINIUM

HEAT TREAT & FINISH

DRAWN
D.COMPTON

CHECK
M.JONES

RELEASE

DATE
03 DEC 01

DATE
03 DEC 01

DATE

REVISION

PART NO.

X2S



SUN hydraulics
LIMITED
WHEELER ROAD, WHITLEY,
COVENTRY, CV3 4LA ENGLAND
TELEPHONE (024) 7621 7400

3	500-001-014	O-RING SEAL	5
2	A330-006-006	SAE -06 PLUG ASSEMBLY	1
1	158-785-002	BODY	1
ITEM	PART NO.	PART NAME	QTY