


MOUNTING HOLES
.21 (5,4) DIA THRO
TYP (4) PLACES



3RD ANGLE
PROJECTION

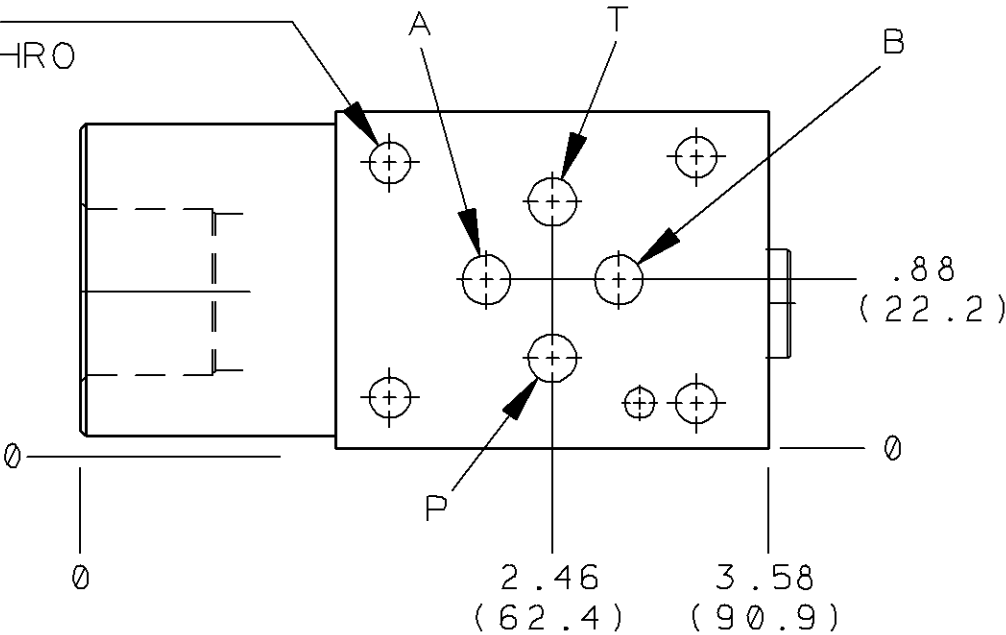

REVISION


PART NO.

A

X2V

REFER TO SUN HYDRAULICS' TECHNICAL LITERATURE & CATALOGUE FOR DETAILS OF CARTRIDGE STANDARD SETTINGS, ADJUSTMENT RANGES, MAXIMUM PRESSURE RATINGS, SEAL MATERIAL, TORQUE VALUES, ETC.

T-11A CAVITY
L.S.DEPTH .69 (17.5)

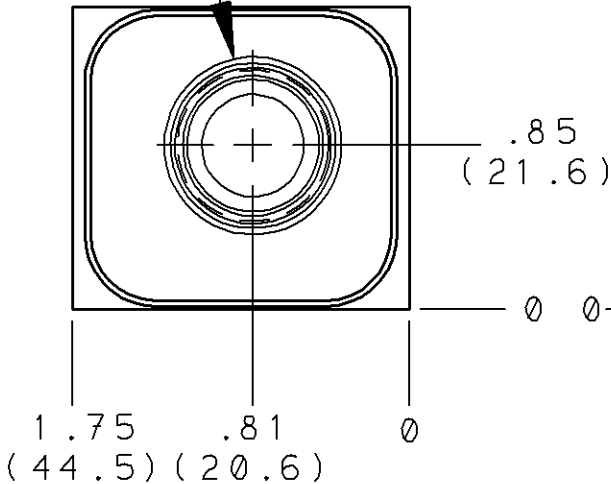

1.33
(33.8)

0


0

0

Sun hydraulics
Coventry UK
X2V
DATE


A P B

1




SUPPLY
LOOSE

GAUGE PORT:
(PLUGGED)

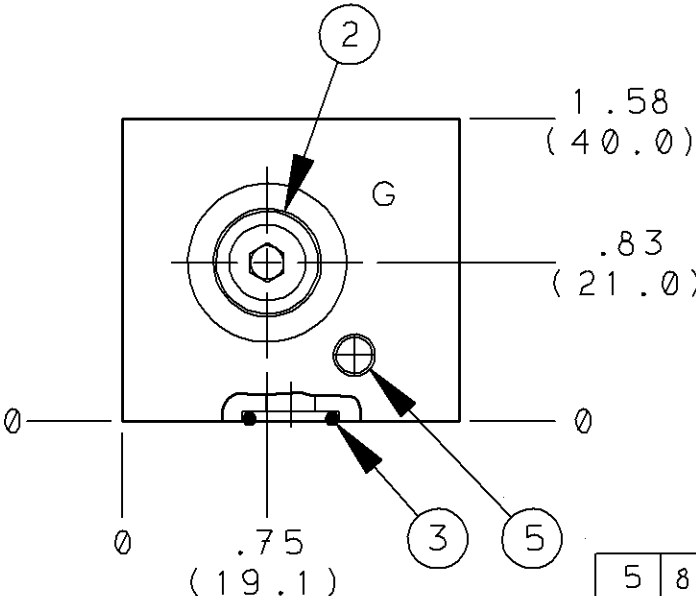

5	850-004-218	KOENIG PLUG	1
4	811-001-006	PIN	1
3	500-001-012	O-RING SEAL	4
2	A330-006-004	SAE-4 PLUG	1
1	157-074-002	BODY	1
I T E M	PART NO.	PART NAME	Q T Y

SEE ALSO
W9V

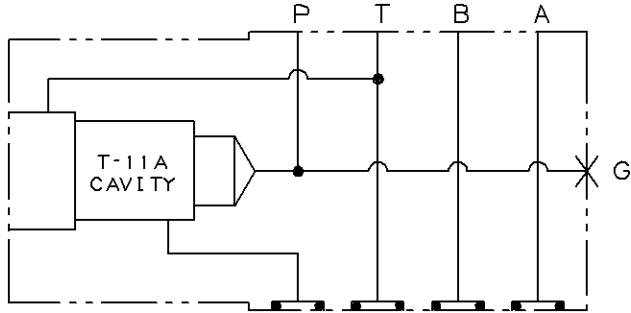

SYMBOL

OUTLINE & ASS'Y

A	ADDED CAV DIMS.	ADDED A P B STAMPING	29 JAN 02	GH				
LTR		REVISION	DATE	DRN	CHK	REL		

UNLESS OTHERWISE SPECIFIED	TITLE	ISO 03 SANDWICH BODY 40mm HIGH T-11A on P, DRAIN to T (Reducer)	REVISION	PART NO.
DIMENSION TOL .X = +/- .030 .XX = +/- .015 .XXX = +/- .005	SCALE	SAME FUNCTION AS W9V BUT OPPOSITE HANDED	A	X2V
ANGLE TOL +/- 1° FINISH V 80 REMOVE ALL BURRS	DRAWN	CHECK	DATE	DATE
	G.HADDEN	DRC	05 NOV 01	NOV 01
		RELEASE		

