


MOUNTING HOLES
.21 (5,4) DIA THRO
TYP (4) PLACES

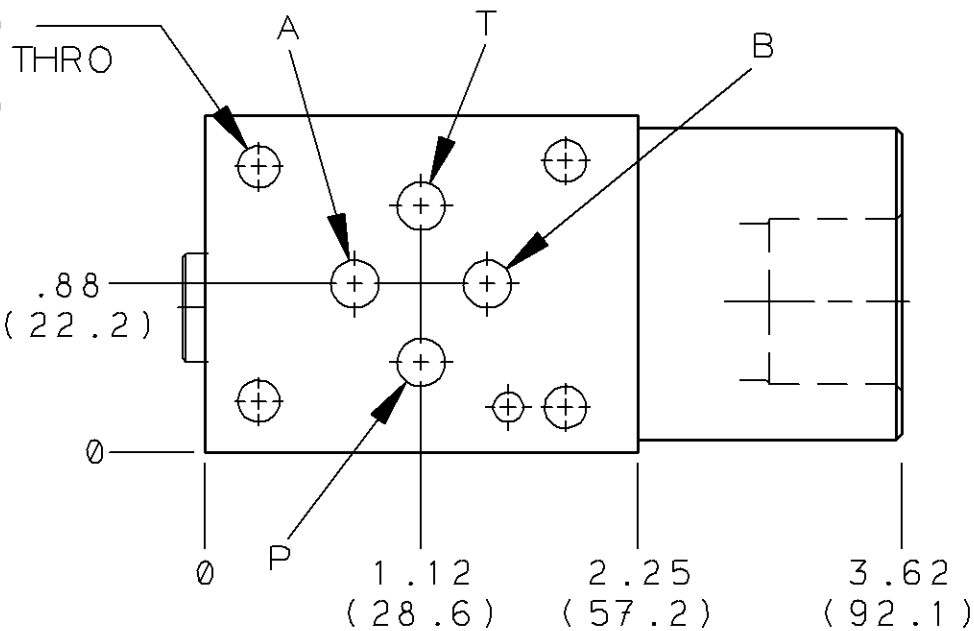

3RD ANGLE
PROJECTION



REVISION
B

PART NO.


X2Z

REFER TO SUN HYDRAULICS' TECHNICAL LITERATURE & CATALOGUE FOR DETAILS OF CARTRIDGE STANDARD SETTINGS, ADJUSTMENT RANGES, MAXIMUM PRESSURE RATINGS, SEAL MATERIAL, TORQUE VALUES, ETC.

GAUGE PORT:
(PLUGGED)

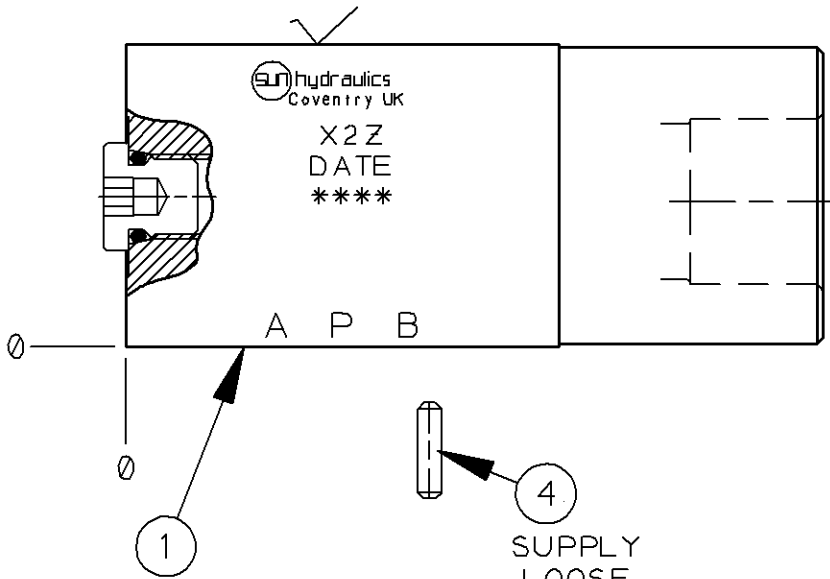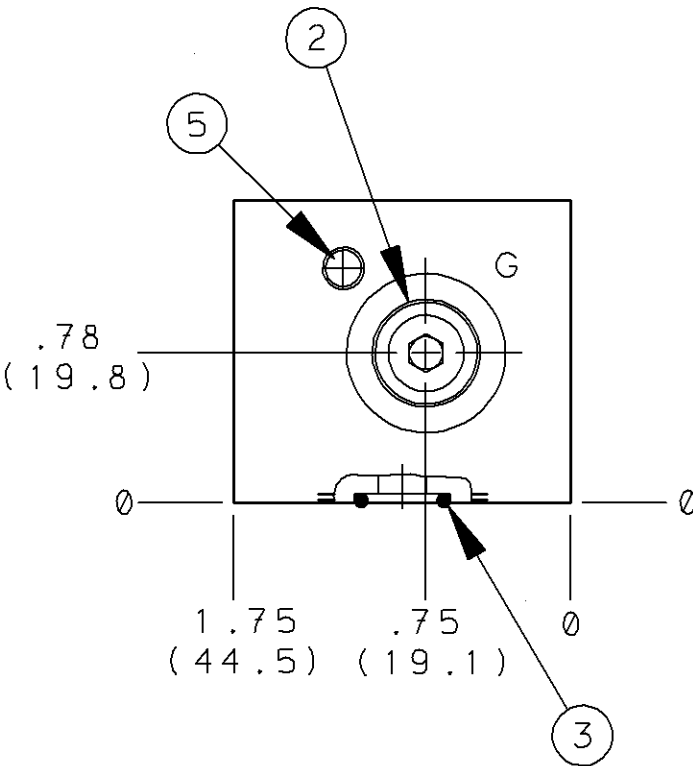


T-11A CAVITY
L.S.DEPTH .69 (17.5)

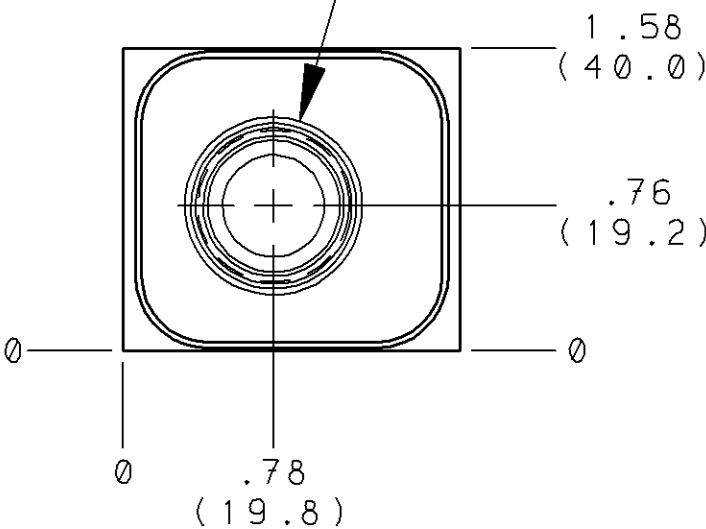

SUPPLY
LOOSE

5	850-004-218	KOENIG PLUG	1
4	811-001-006	PIN	1
3	500-001-012	O-RING SEAL	4
2	A330-006-004	SAE-4 PLUG	1
1	158-772-002	BODY	1
PART NO.		PART NAME	QTY

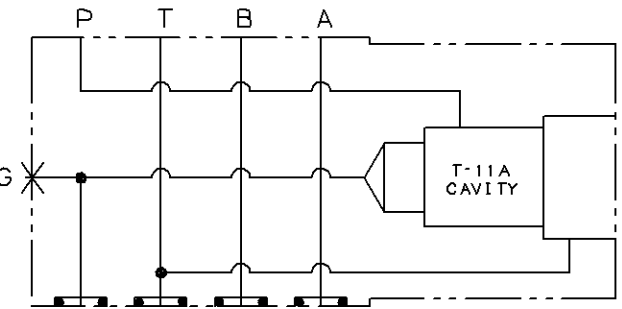

SYMBOL

OUTLINE & ASS'Y

B	ADDED CAV DIMS. ADDED A P B STAMPING	29 JAN 02	GH		
A	1.12 (28.6) WAS 1.17 (29.8)	12 DEC 01	GH		
LTR	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED		TITLE		ISO 03 SANDWICH BODY 40mm HIGH T-11A ON P, DRAINED TO T (SEQUENCE)	
DIMENSION TOL .X = +/- .030 .XX = +/- .015 .XXX = +/- .005		SCALE REF 1:1		SIMILAR TO W4L	
ANGLE TOL +/- 1° FINISH V 80 REMOVE ALL BURRS		DRAWN G.HADDEN		CHECK G.HADDEN	
		DATE 04 DEC 01		RELEASE DATE 04 DEC 01	

REVISION	PART NO.
B	X2Z

	hydraulics ® LIMITED WHEELER ROAD, WHITLEY, COVENTRY, CV3 4LA ENGLAND. TELEPHONE (01203) 307696
---	--