

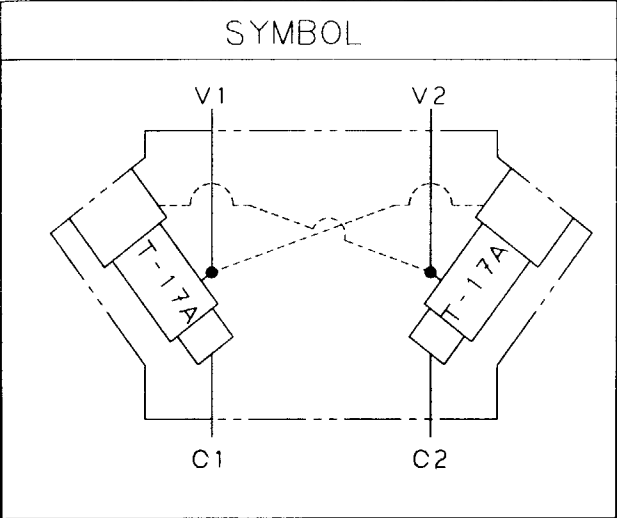
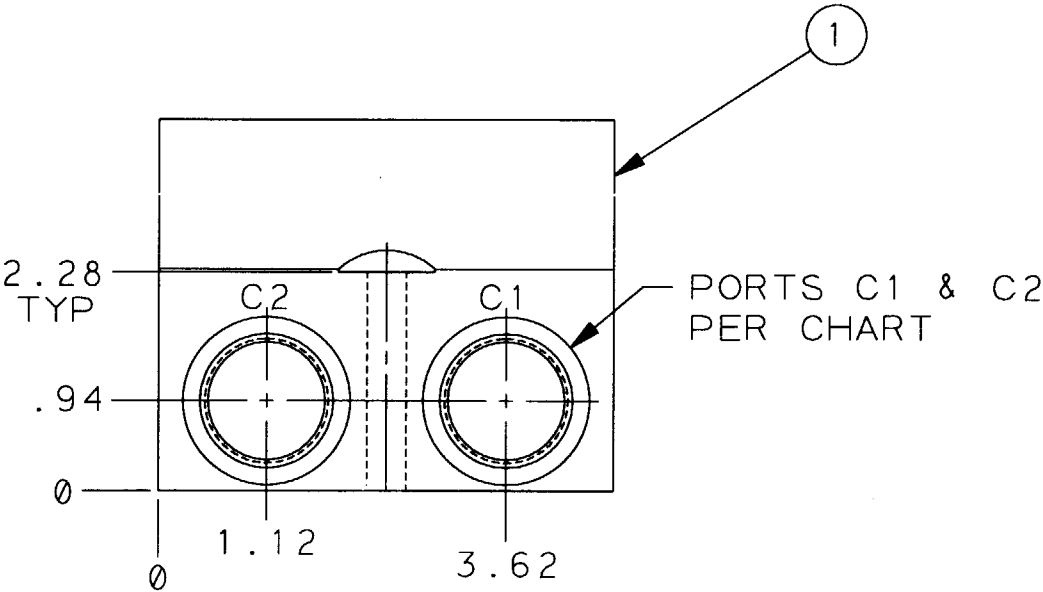
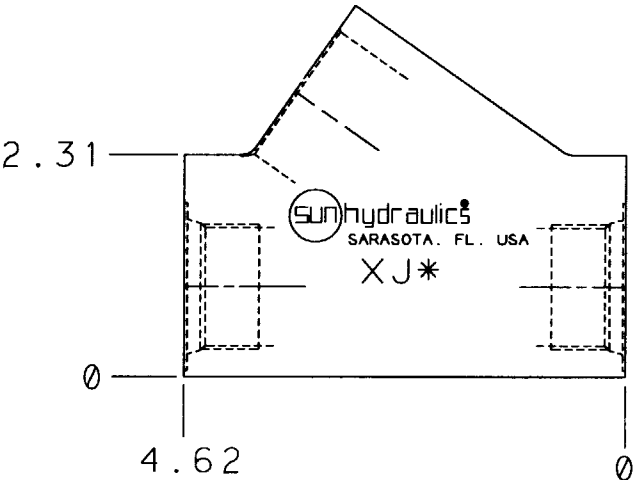


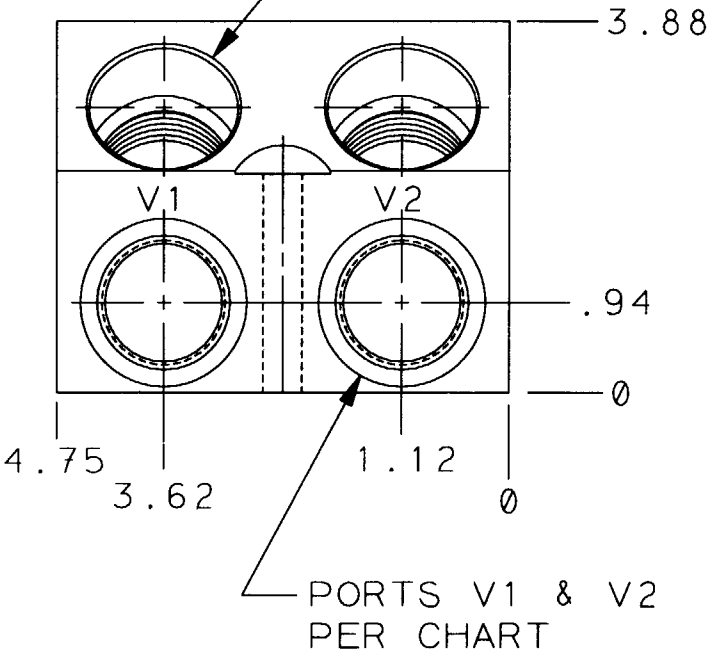

NOTES:

- 1) ALUMINUM BODIES: 3000 PSI MAX CONTINUOUS SERVICE PRESSURE
2) FOR OTHER OPTIONS, SEE OPTION SHEET

T-17A CAVITY
.91 L.S. DEPTH
TYP (2) PLACES

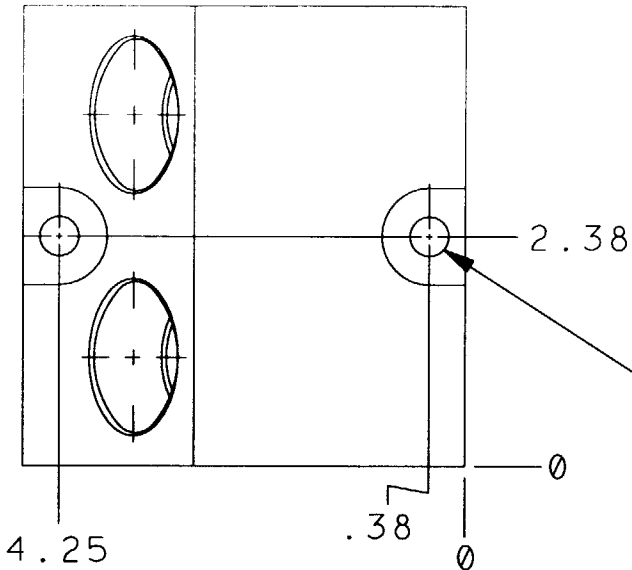

XJX	-006	1.000-11 BSPP
XJW	-005	.750-14 BSPP
XJM	-004	SAE-16
XJL	-003	SAE-12
XJE	-002	1.000-11.5 NPTF
XJD	-001	.750-14 NPTF
MODEL NO.	BODY DASH NO.	PORTS V1 & V2 C1 & C2

LET					REVISION			DATE			DRN			CHK			REL		
UNLESS OTHERWISE SPECIFIED					TITLE			BODY-DUAL, IN-LINE, CROSS-PILOTED T-17A CAVITIES			REVISION			PART NO.			XJ*		
DIMENSION TOL					SCALE			REF.			MATERIAL			ALUMINUM			HEAT TREAT & FINISH		
.x ±.030					DRAWN			CHECK			RELEASE			DATE			DATE		
.xx ±.015					DATE			DATE			DATE			DATE			DATE		
.xxx ±.005					DATE			DATE			DATE			DATE			DATE		
ANGLE TOL ± 1/2					DATE			DATE			DATE			DATE			DATE		
FINISH 80✓					DATE			DATE			DATE			DATE			DATE		
REMOVE ALL BURRS					DATE			DATE			DATE			DATE			DATE		

