

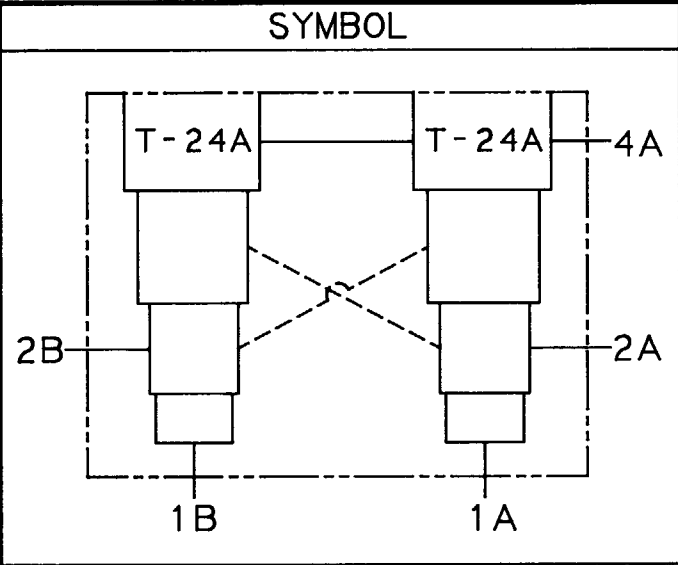
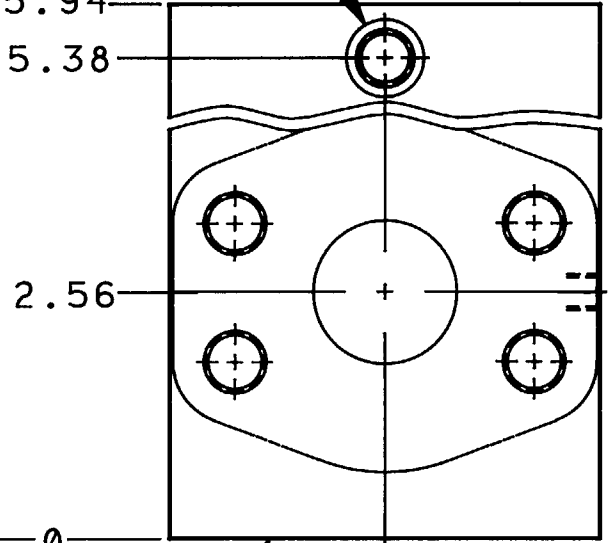
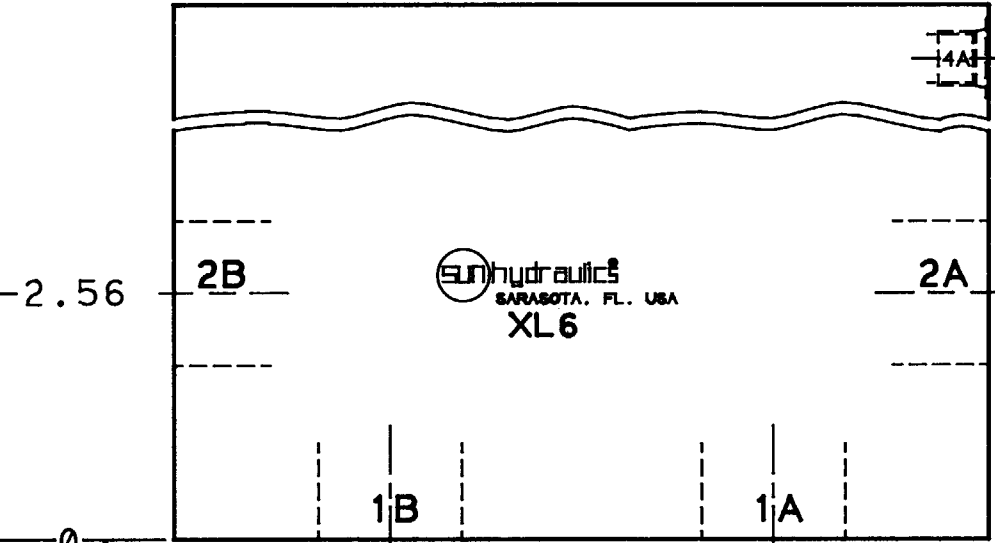


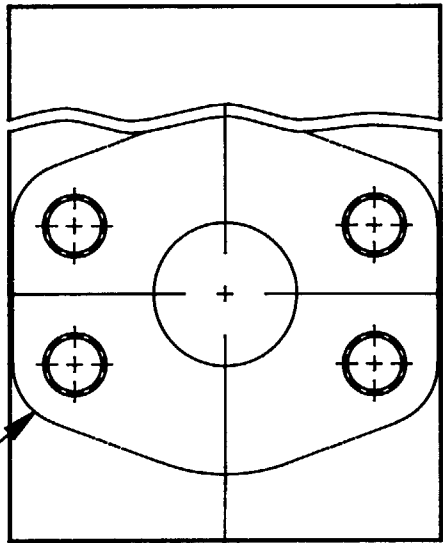



T-24A CAVITY
2.00 L.S. DEPTH
TYP (2) PLACES

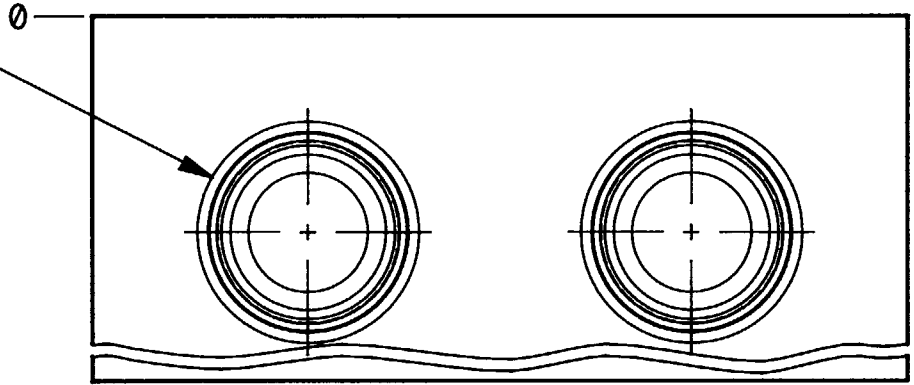

1.50 SAE CODE-62
4 BOLT FLANGE
PATTERN (4) PLACES
INCH: .625-11UNC x
1.38 DP.
METRIC: M16 x 2.0-6H
x 1.38 DP.
TYP (16) PLACES

NOTES:
1) ALUMINUM BODIES-
3000 PSI MAX.
CONTINUOUS SERVICE
PRESSURE.

INCH: .375-16UNC x
.62 DP.
METRIC: M10 x 1.5-6H
x .62 DP.
TYP (2) PLACES

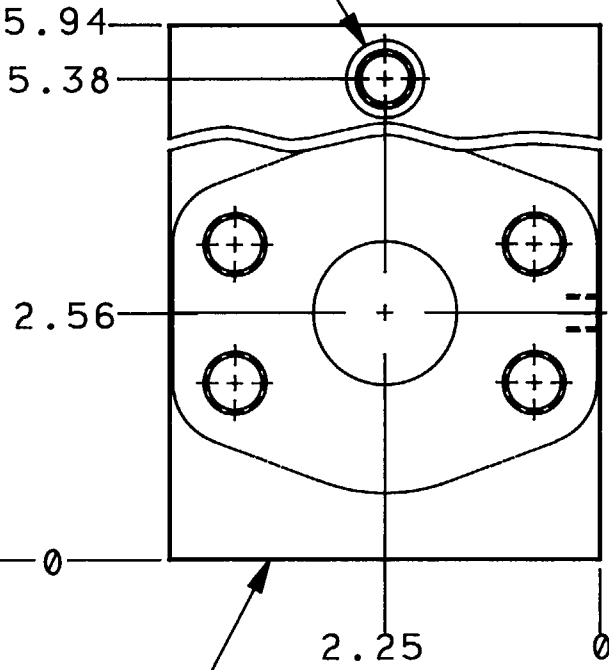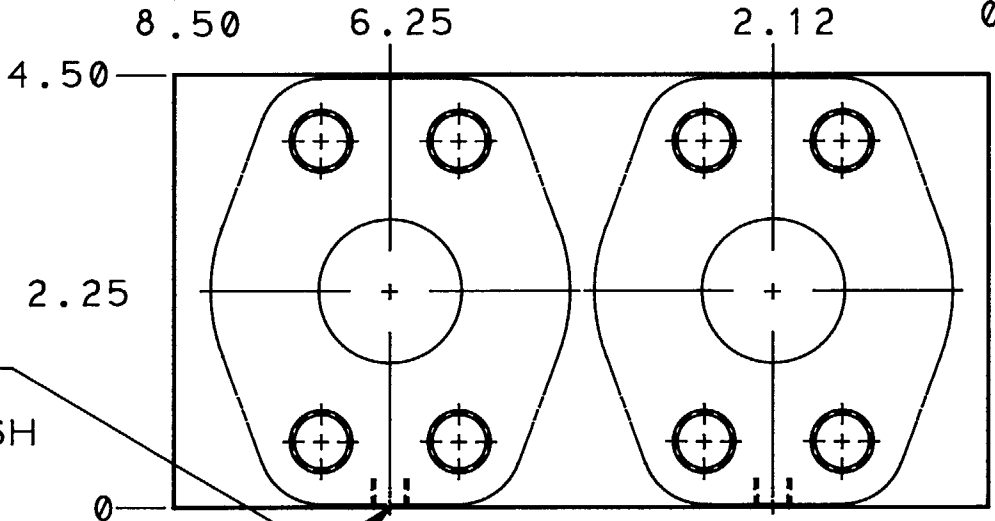

REVISION		PART NO.	
A		XL6	
MODEL NO.	BODY DASH NO.	PORT 4A	FLANGE TH'D TYPE
XL6	-001	SAE-6	INCH
XL6/M	-002	.250-19 BSPP	METRIC

1

UNLESS OTHERWISE SPECIFIED				TITLE DUAL CROSS-PILOTED T-24A CAVITIES W/COMMON #4 PORTS-1.50 CODE-62				REVISION		PART NO.	
DIMENSION TOL				SCALE REF.				A		XL6	
.x = ±.030				1 = 2							
.xx = ±.015				DRAWN							
.xxx = ±.005				CHECK							
ANGLE TOL ±%				RELEASE							
FINISH 80✓				DATE							
REMOVE ALL BURRS				DATE							
B REVISED SYMBOL				DATE							
A REMOVED PORT 4B.				DATE							
LET REVISION				DATE							

