



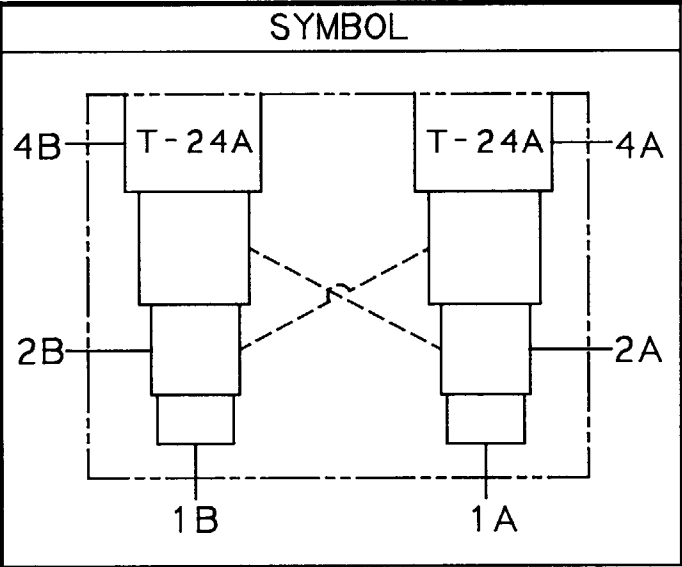





T-24A CAVITY
2.00 L.S. DEPTH
TYP (2) PLACES

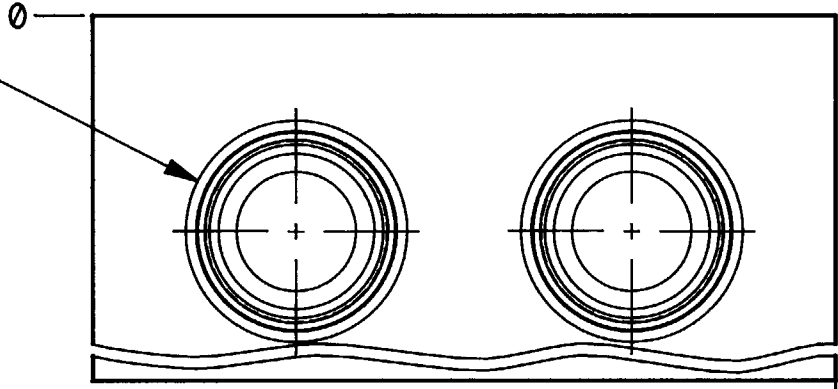

REVISION		PART NO.		XSR	
MODEL NO.	BODY DASH NO.	PORTS 4A & 4B	FLANGE TH'D TYPE		
XSR	-001	SAE-6	INCH		
XSR/M	-002	.250-19 BSPP	METRIC		

PORTS 4A & 4B
PER CHART

1.50 SAE CODE-61
4 BOLT FLANGE
PATTERN (4) PLACES
INCH: .500-13UNC x
1.06 DP.
METRIC: M14 x 2.0-6H
x 1.06 DP.
TYP (16) PLACES

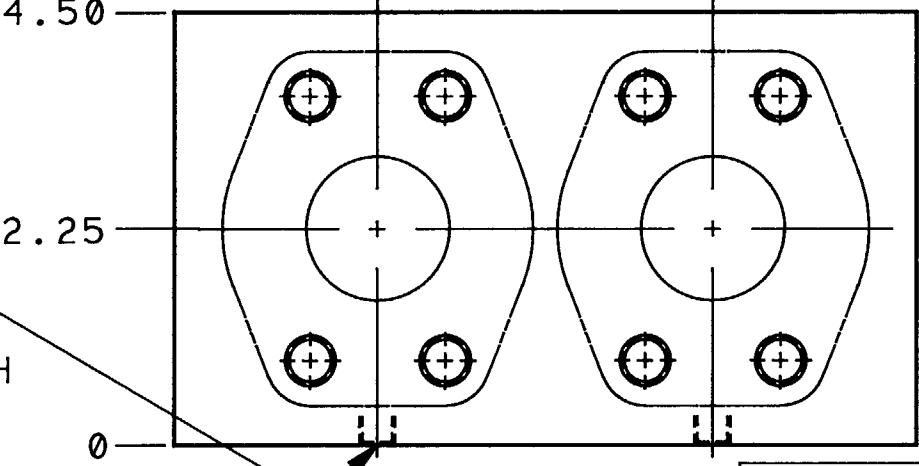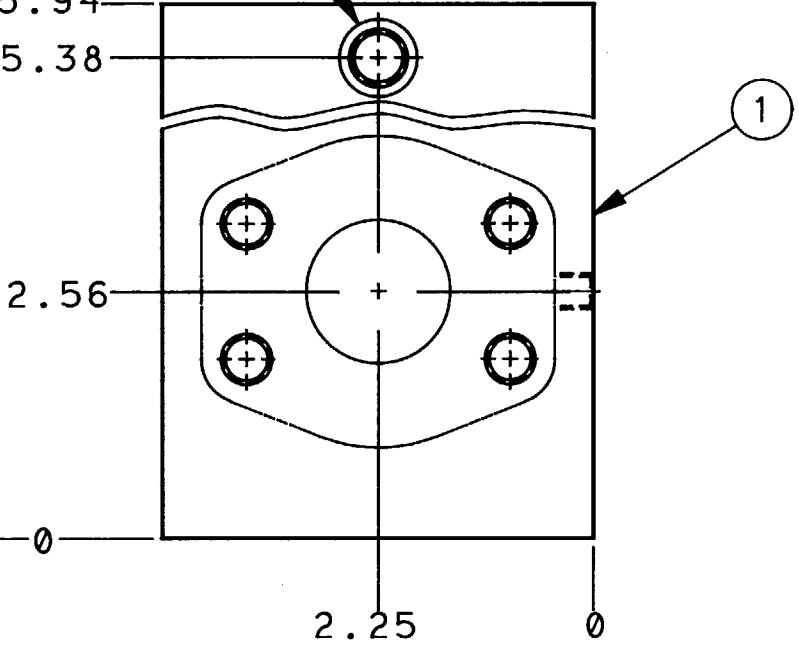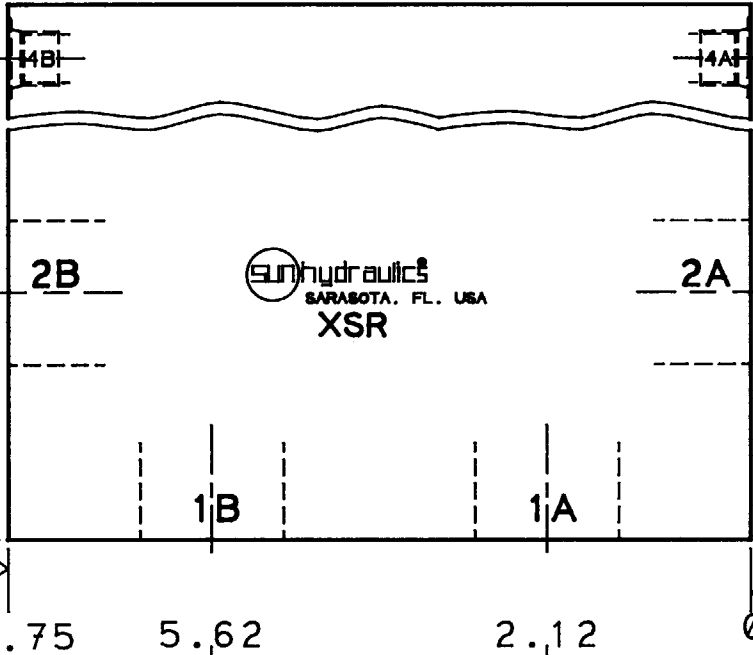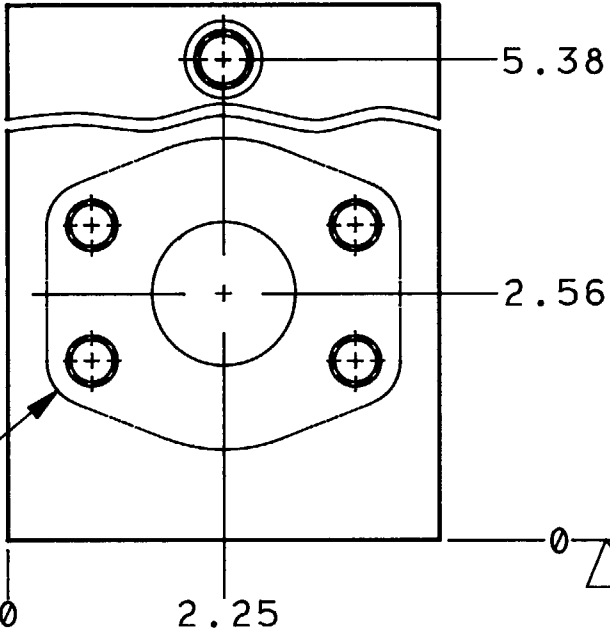

INCH: .375-16UNC x
.62 DP.
METRIC: M10 x 1.5-6H
x .62 DP.
TYP (2) PLACES

NOTES:
1) ALUMINUM BODIES-
3000 PSI MAX.
CONTINUOUS SERVICE
PRESSURE.

1	152-256-SEE CHRT	BODY	1
ITEM	PART NO.	PART NAME	QTY

								UNLESS OTHERWISE SPECIFIED	TITLE DUAL CROSS-PILOTED T-24A CAVITIES W/INDEPENDENT #4 PORTS-1.50 CODE-61			REVISION	PART NO. XSR
								DIMENSION TOL	SCALE	REF.	MATERIAL	 sun hydraulics [®] CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983	
							.x = ±.030 .xx = ±.015 .xxx = ±.005	1 = 2		ALUMINUM			
							ANGLE TOL ± 1/2° FINISH 80✓ REMOVE ALL BURRS	DRAWN BR5	CHECK	RELEASE	HEAT TREAT & FINISH		
								DATE	DATE	DATE			
								11/29/89					
LET	REVISION					DATE	DRN	CHK	REL				

