



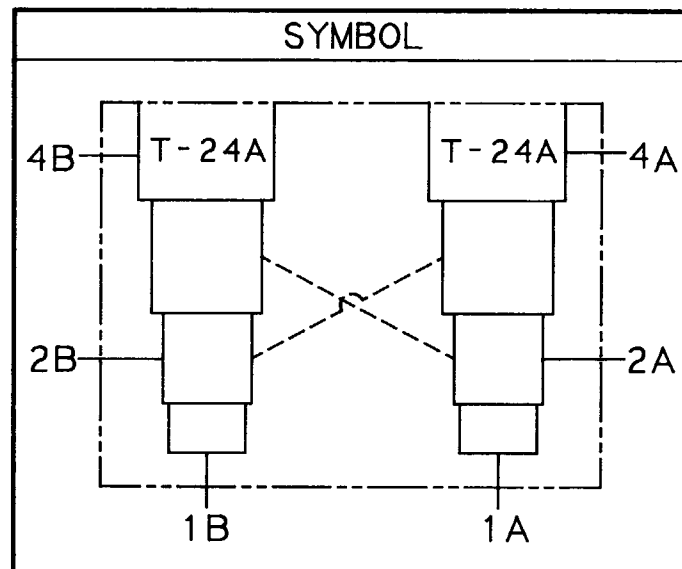





T-24A CAVITY
2.00 L.S. DEPTH
TYP (2) PLACES

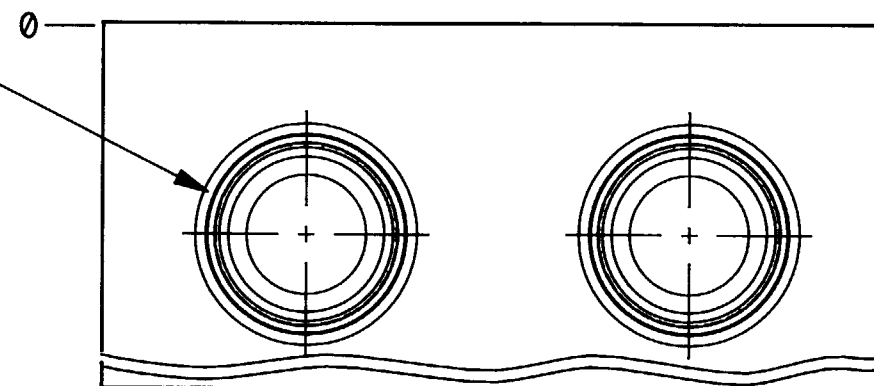

REVISION		PART NO.	
		XSS	
MODEL NO.	BODY DASH NO.	PORTS 4A & 4B	FLANGE TH'D TYPE
XSS	-001	SAE-6	INCH
XSS/M	-002	.250-19 BSPP	METRIC

PORTS 4A & 4B
PER CHART

2.00 SAE CODE-61
4 BOLT FLANGE
PATTERN (4) PLACES
INCH: .500-13UNC x
1.06 DP.
METRIC: M14 x 2.0-6H
x 1.06 DP.
TYP (16) PLACES

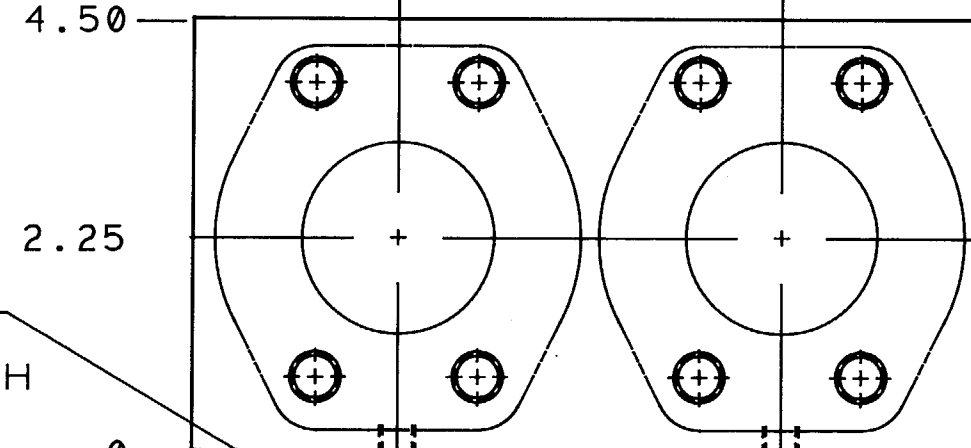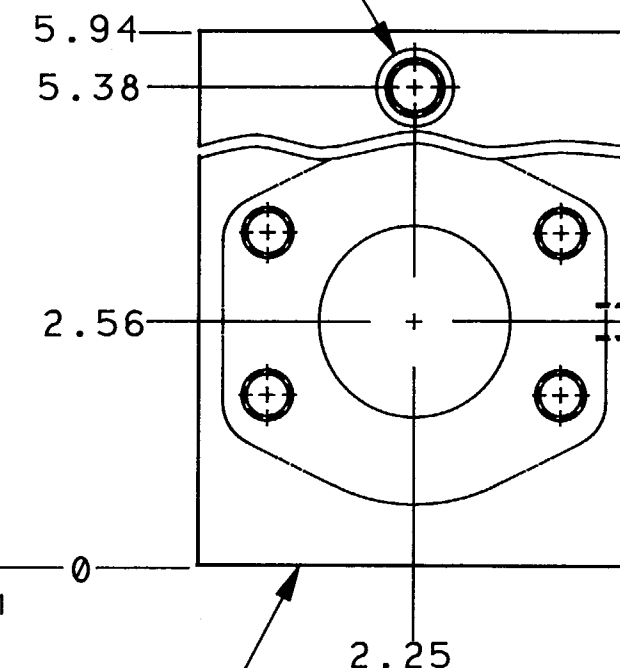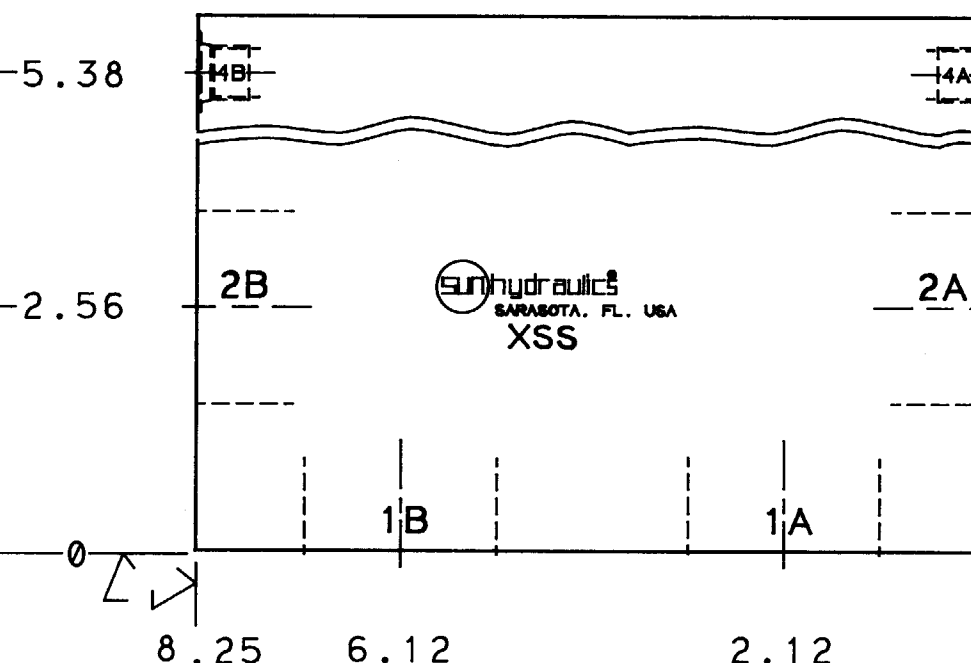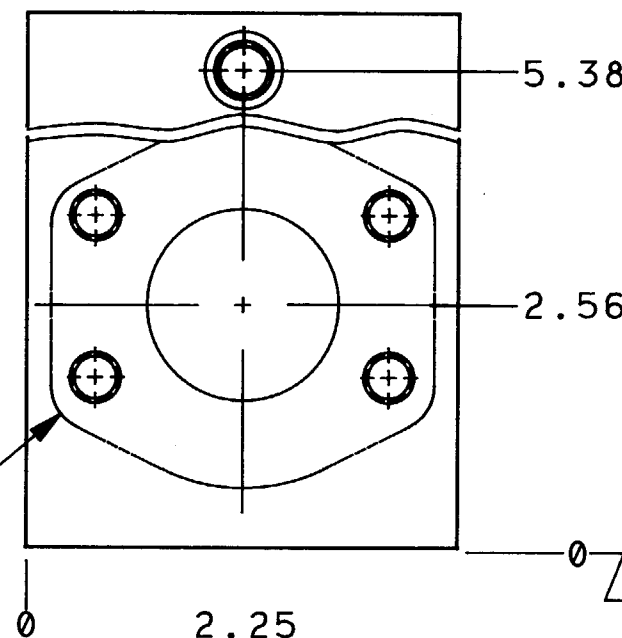

INCH: .375-16UNC x
.62 DP.
METRIC: M10 x 1.5-6H
x .62 DP.
TYP (2) PLACES

NOTES:

1) ALUMINUM BODIES-
3000 PSI MAX.
CONTINUOUS SERVICE
PRESSURE.

1	152-258-SEE CHRT	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE

REVISION		PART NO.	
		XSS	
TITLE		REVISION	
DUAL CROSS-PILOTED T-24A CAVITIES W/INDEPENDENT #4 PORTS-2.00 CODE-61			
SCALE		MATERIAL	
1 = 2		ALUMINUM	
DRAWN		HEAT TREAT & FINISH	
BR5			
DATE		DATE	
11/29/89		12-18-89	

SUN hydraulics®
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983