
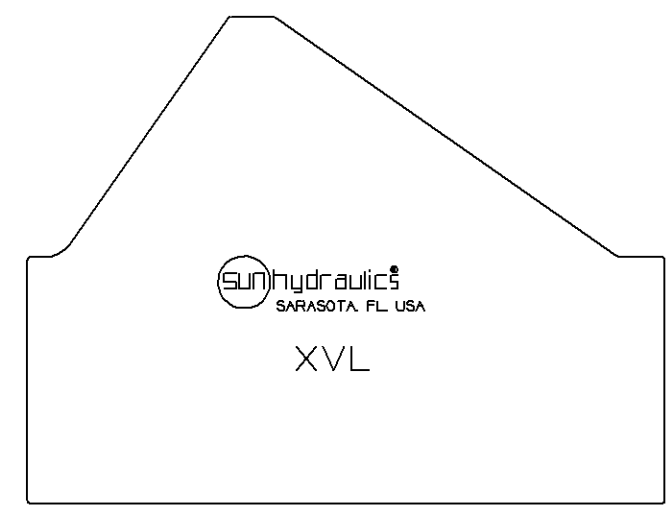


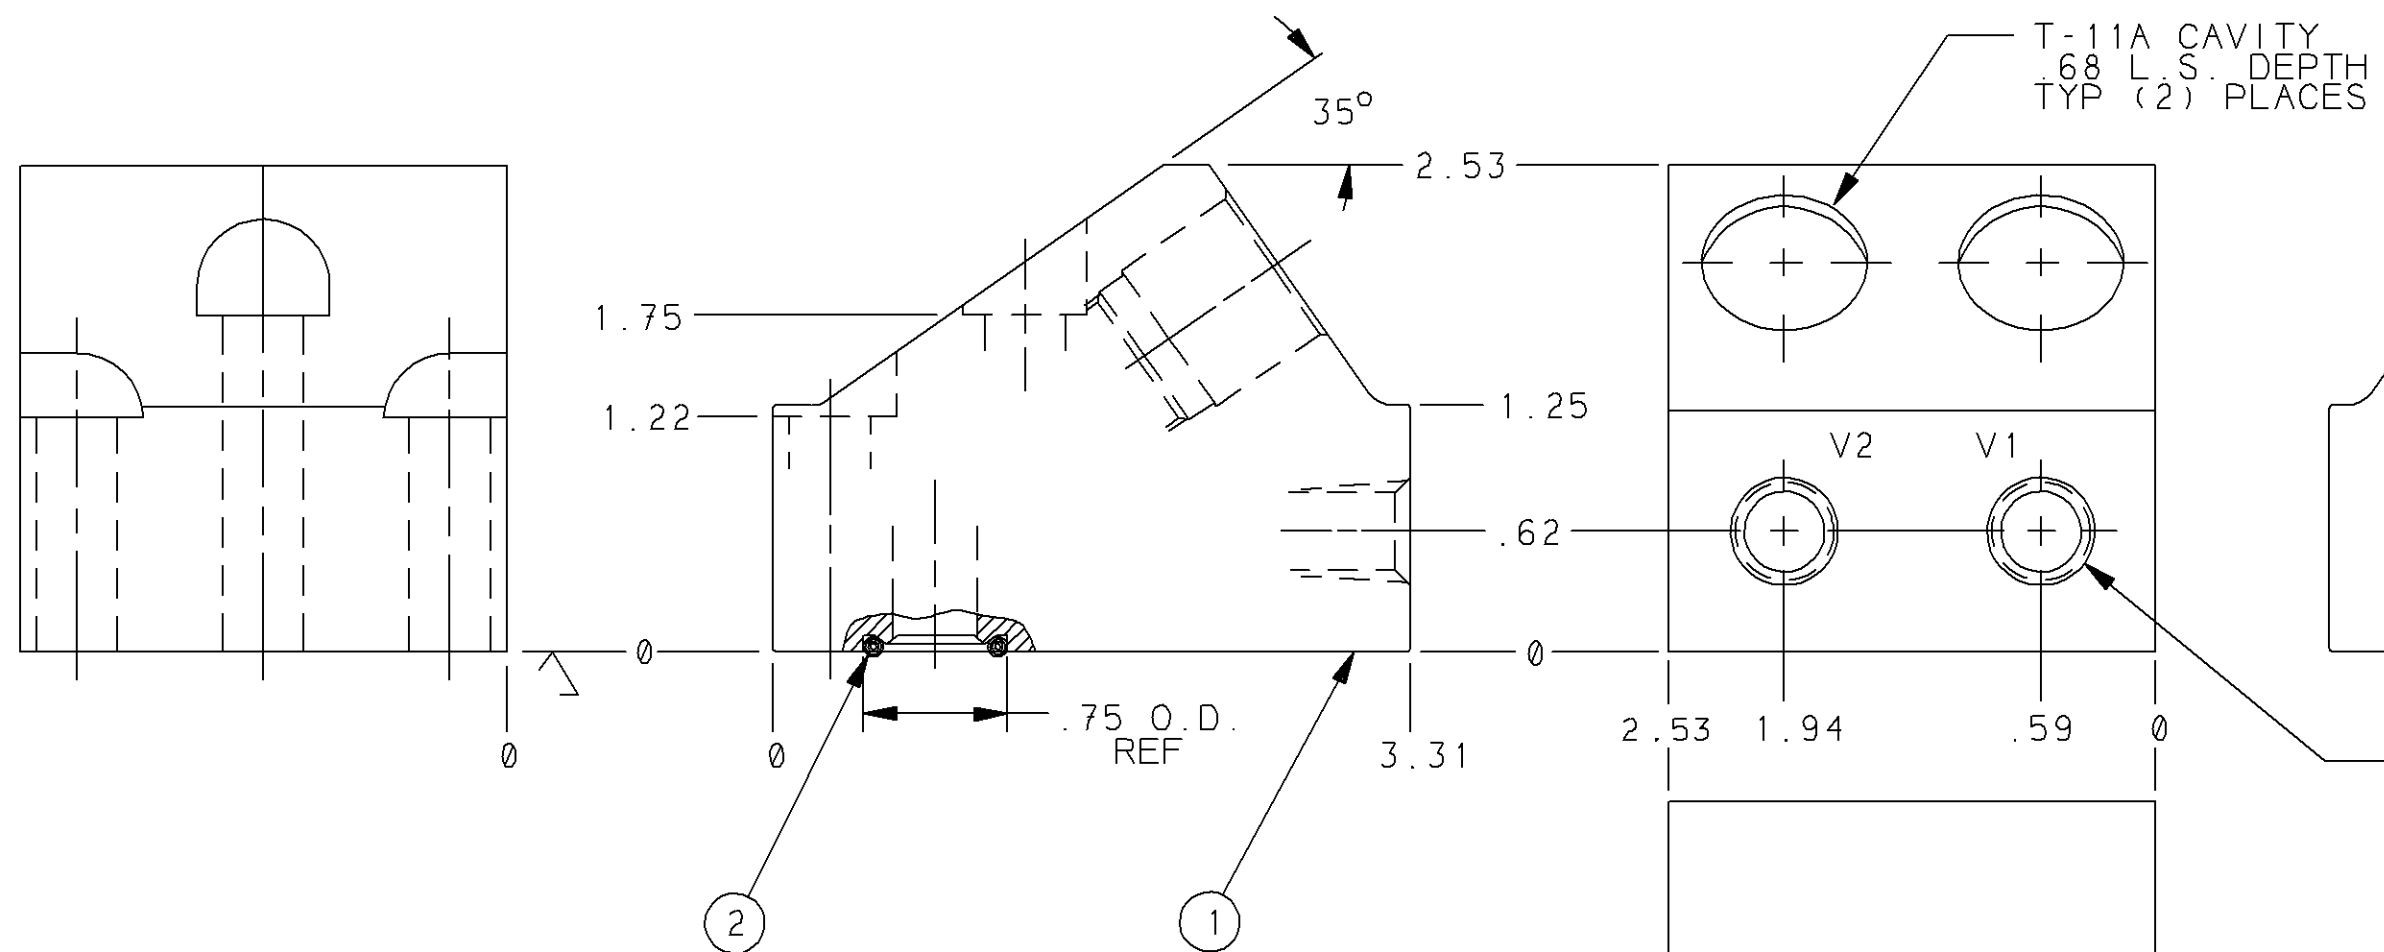


.250-18 NPTF PORT
TYP (2) PLACES


NOTES:

- 1) SEALS: BUNA-N
- 2) ALUMINUM BODIES-3000 PSI
MAX. CONTINUOUS SERVICE
PRESSURE.

C-BORED .59 DIA. FOR SOCKET
HEAD CAP SCREW ON
OPPOSITE FACE
.42 DIA. DR. THRU
TYP. (3) PLACES

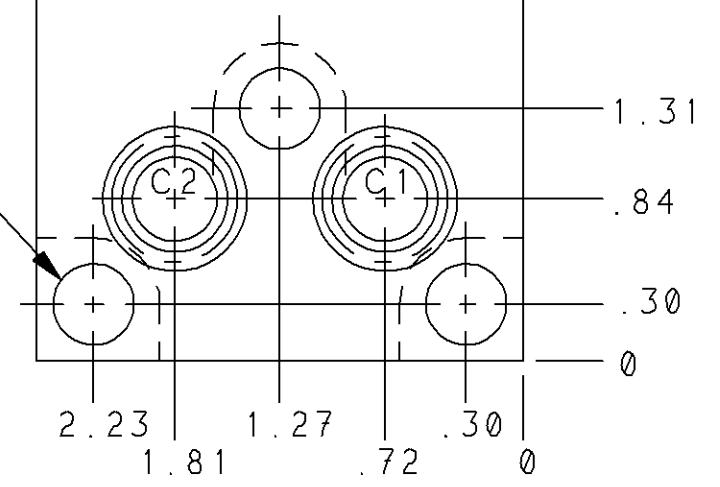

SYMBOL

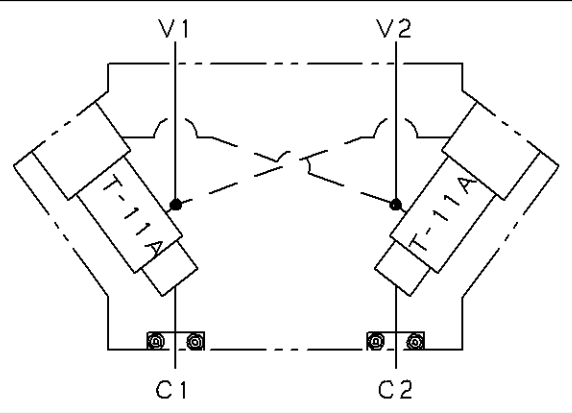

2	500-001-113	FACE SEAL	2
1	151-625-001	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE & ASSEMBLY

					UNLESS OTHERWISE SPECIFIED	TITLE			REVISION	PART NO.
					DIMENSION TOL	GASKET MTD BODY-DUAL CROSS			A	XLV
					.x = ±.030	PILOTED T-11A CAVITIES				
					.xx = ±.015	SCALE	REF.	MATERIAL		
					.xxx = ±.005	1 / 1		ALUMINUM BODY		
					ANGLE TOL ± 1/2	DRAWN	CHECK	RELEASE		
					FINISH 80✓	BR5	R/B			
					REMOVE ALL BURRS	DATE	DATE	DATE		
						1/31/89	2/1/89			
A	.42 DIA. WAS .41				06APR01	SMS	DSS	10407		
LET	REVISION				DATE	DRN	CHK	REL		

