



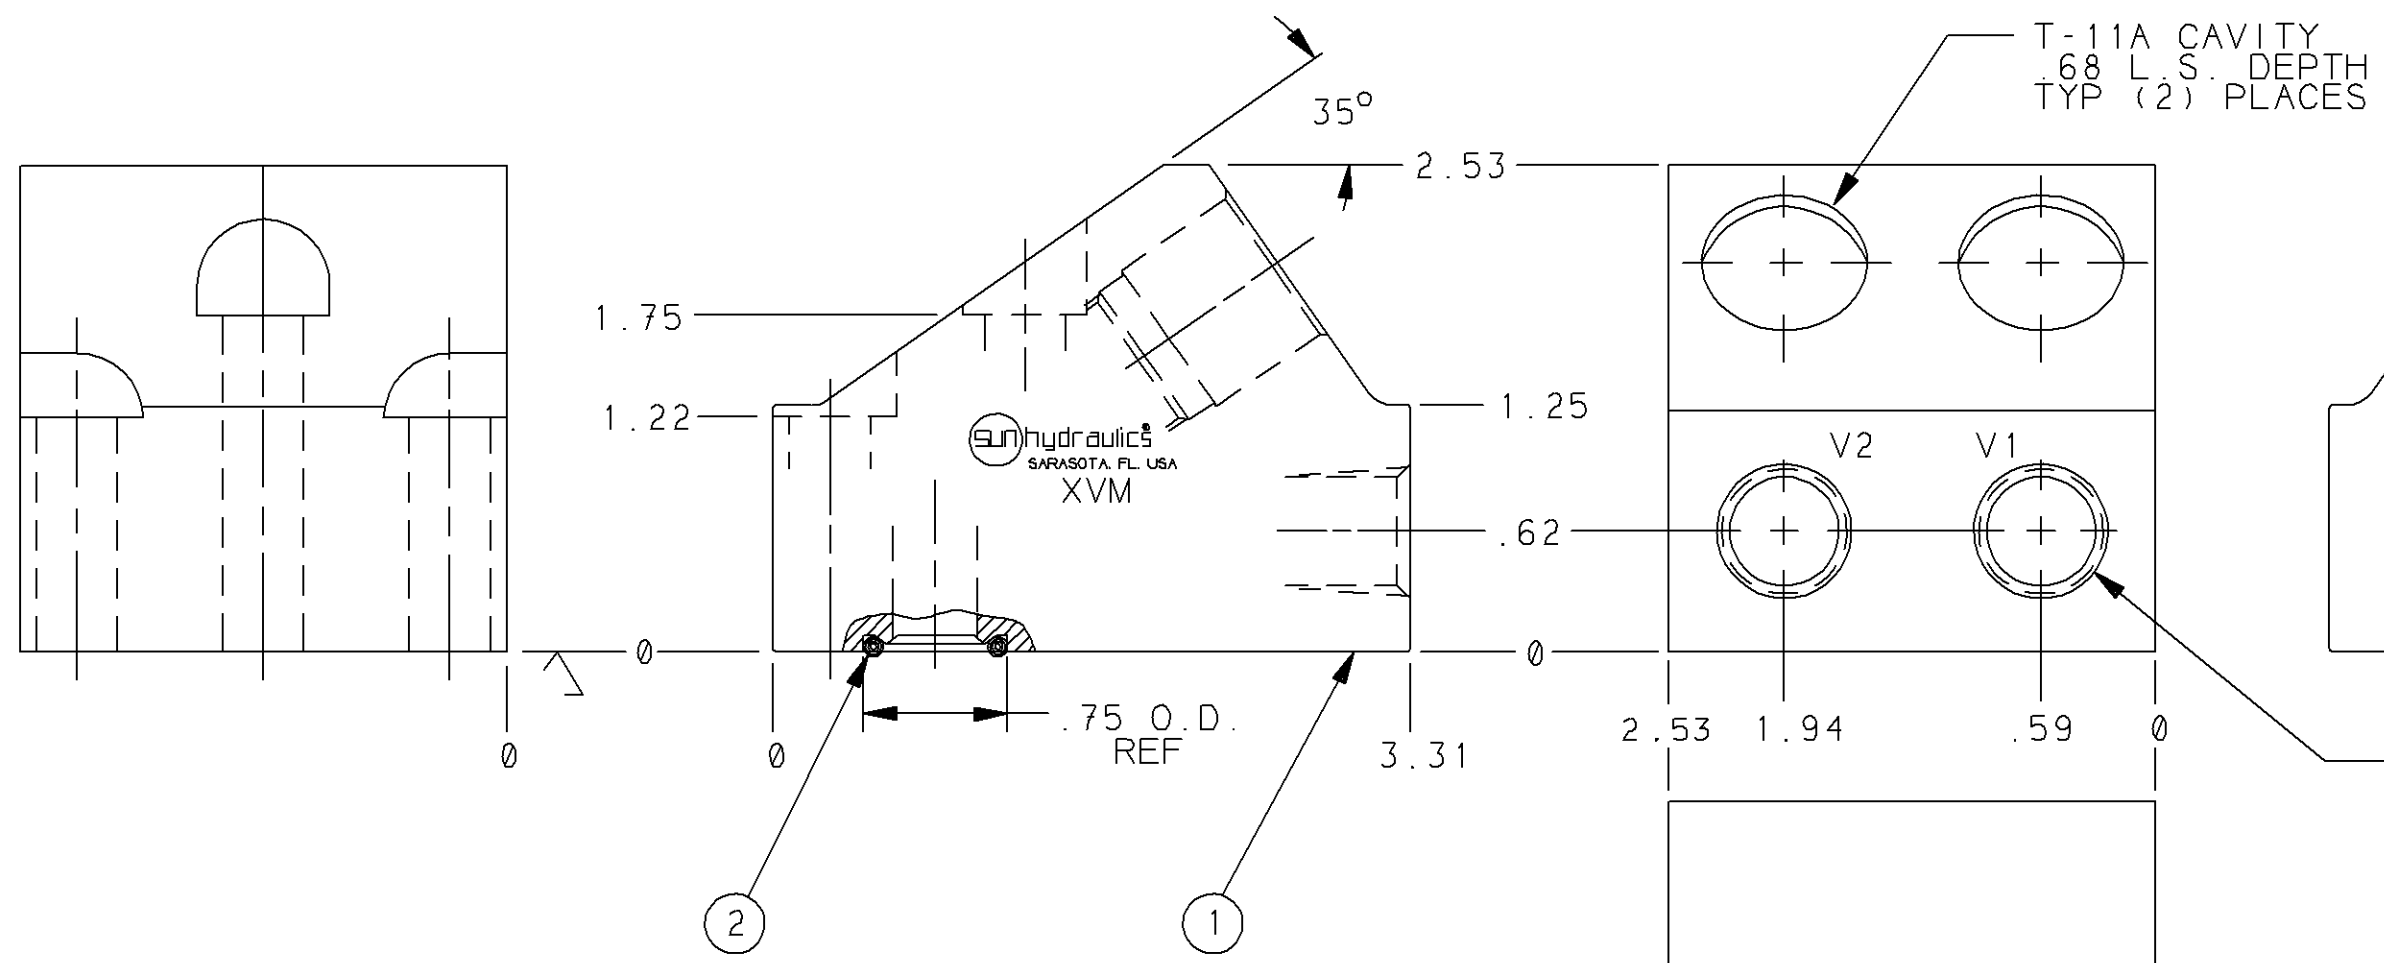


REVISION	PART NO.
A	XVM

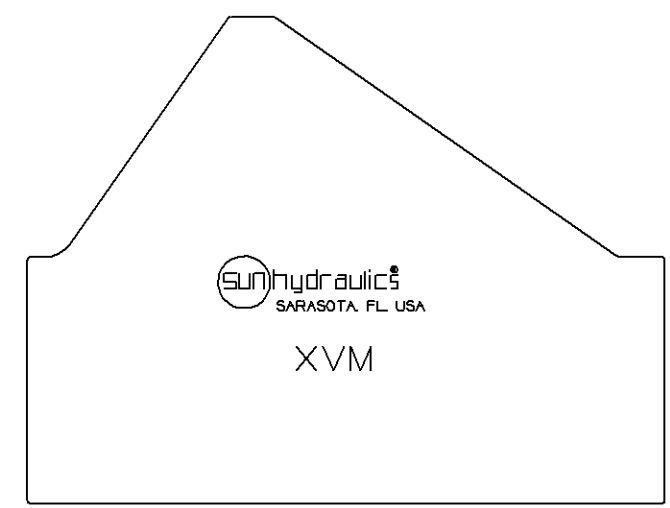

- NOTES:
- 1) SEALS: BUNA-N
 - 2) ALUMINUM BODIES-3000 PSI MAX. CONTINUOUS SERVICE PRESSURE.

C-BORED .59 DIA. FOR SOCKET HEAD CAP SCREW ON OPPOSITE FACE .42 DIA. DR. THRU TYP. (3) PLACES

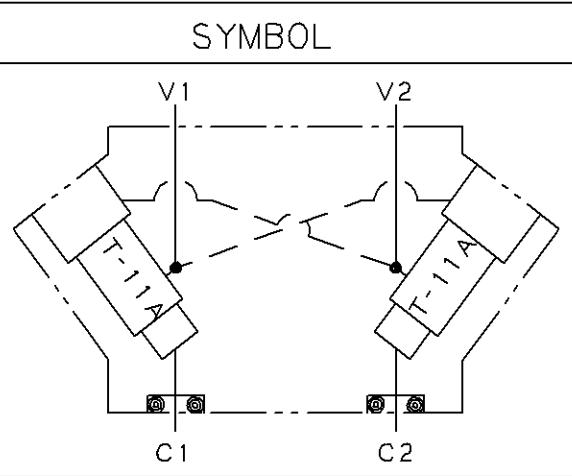

ITEM	PART NO.	PART NAME	QTY
2	500-001-113	FACE SEAL	2
1	151-625-002	BODY	1

OUTLINE & ASSEMBLY					
TITLE: GASKET MTD BODY-DUAL CROSS PILOTED T-11A CAVITIES					
SCALE: REF. 1/1					
DRAWN: BRS					
CHECK: R/B					
RELEASE: DATE					
DATE: 2/1/89					
DATE: 2/2/89					
DATE: DATE					
MATERIAL: ALUMINUM BODY					
HEAT TREAT & FINISH					
UNLESS OTHERWISE SPECIFIED					
DIMENSION TOL					
.x = ±.030					
.xx = ±.015					
.xxx = ±.005					
ANGLE TOL ± 1/2					
FINISH 80✓					
REMOVE ALL BURRS					
A	.42 DIA. WAS .41	06APR01	SMS	DSS	10407
LET	REVISION	DATE	DRN	CHK	REL

