

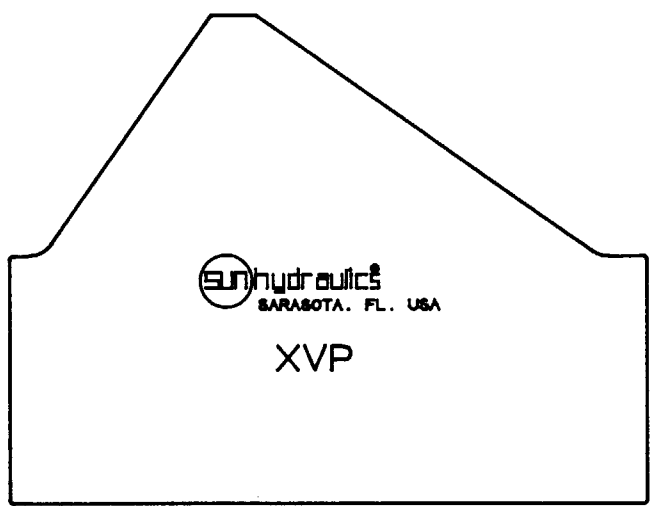


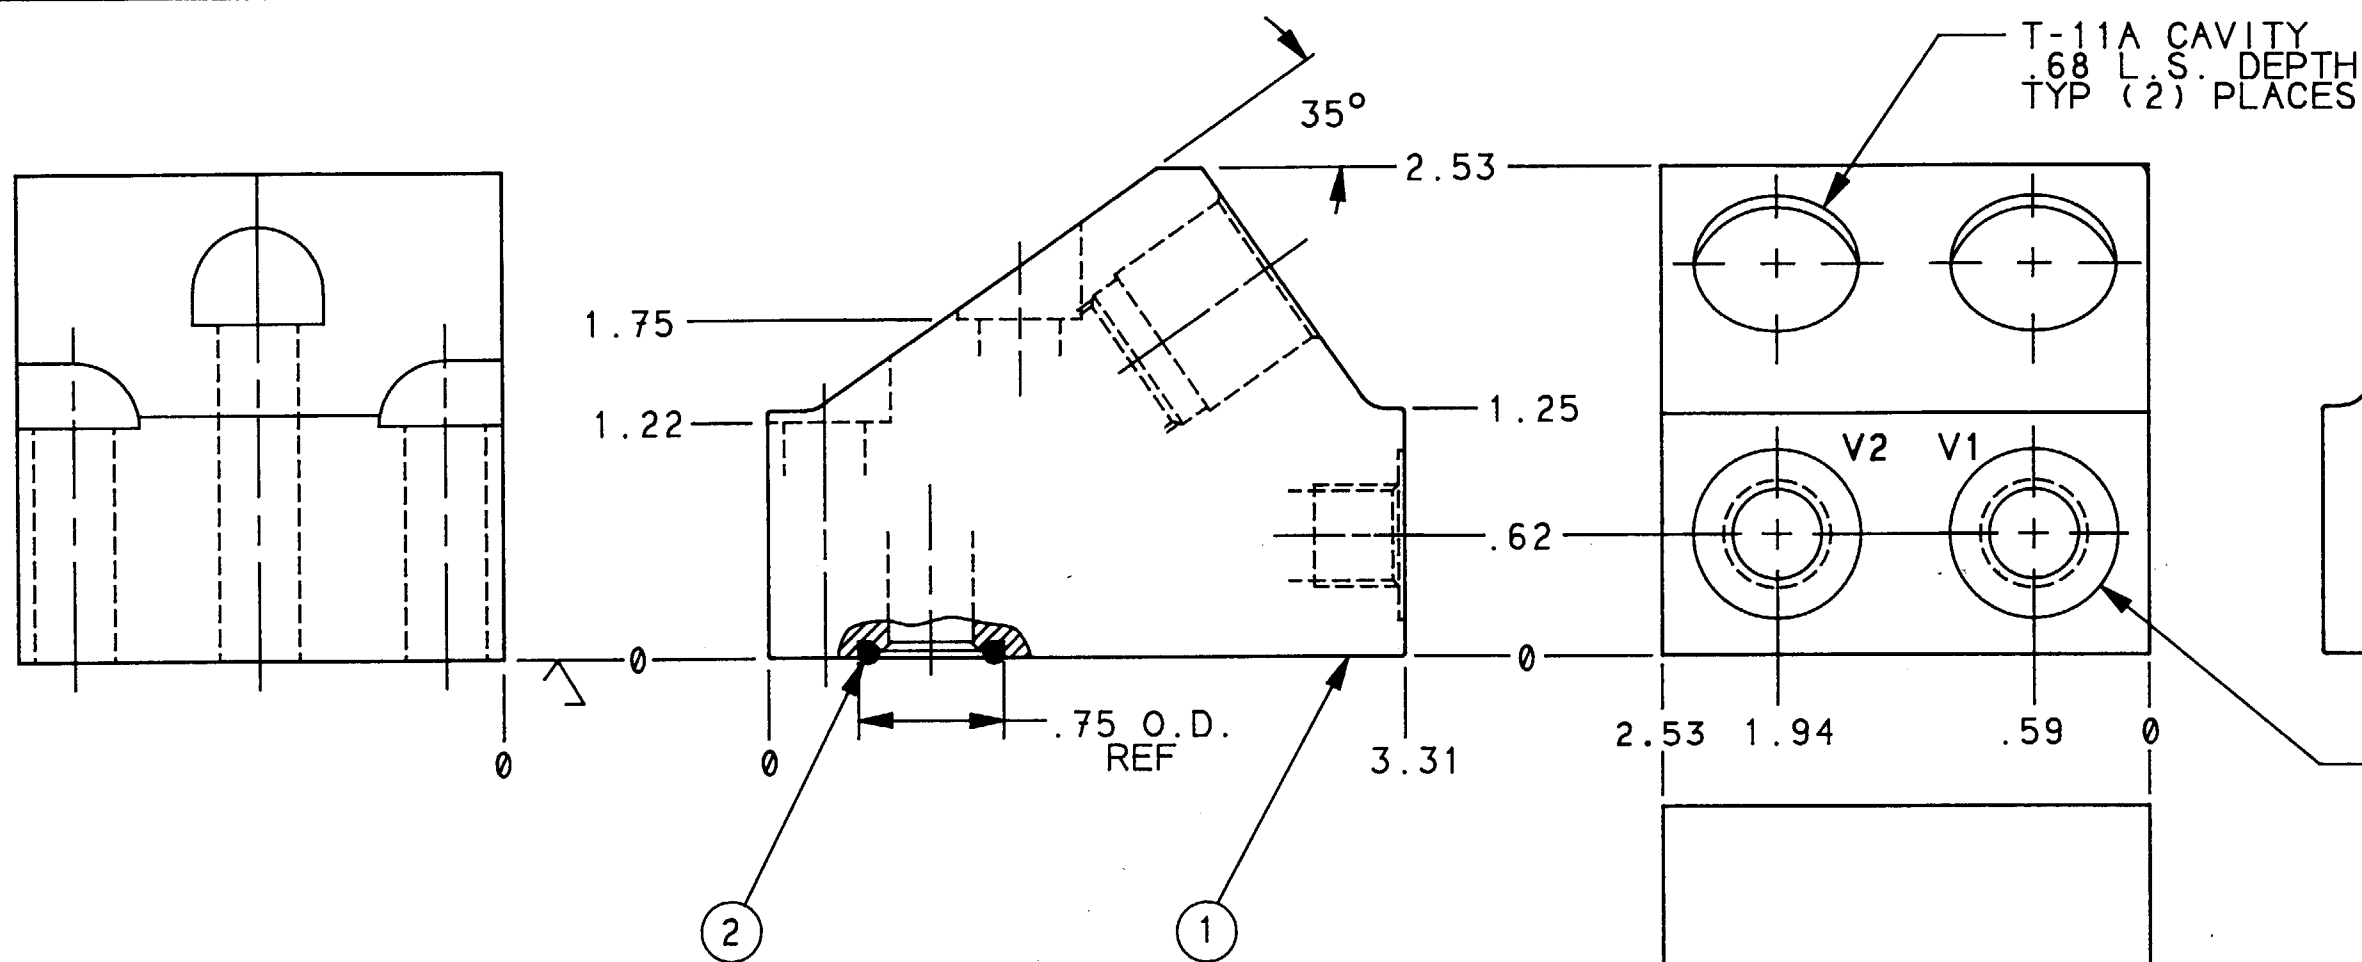

NOTES:

- 1) SEALS: BUNA-N
- 2) ALUMINUM BODIES-3000-PSI MAX. CONTINUOUS SERVICE PRESSURE.

C-BORED .69 DIA. FOR SOCKET
HEAD CAP SCREW ON
OPPOSITE FACE
.42 DIA. DR. THRU
TYP. (3) PLACES

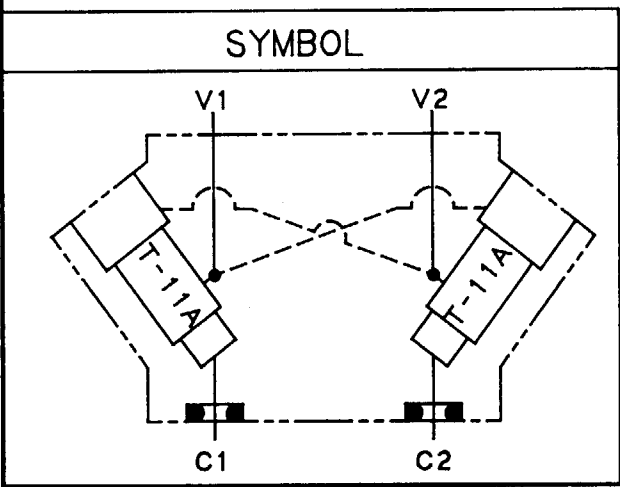

2	500-001-113	FACE SEAL	2
1	151-625-005	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE & ASSEMBLY		TITLE GASKET MTD BODY-DUAL CROSS PILOTED T-11A CAVITIES		REVISION PART NO. XVP	
UNLESS OTHERWISE SPECIFIED		SCALE REF. 1/1		MATERIAL ALUMINUM BODY	
DIMENSION TOL		DRAWN BRS		HEAT TREAT & FINISH	
.x ±.030		CHECK R/B		DATE 2/2/89	
.xx ±.015		RELEASE 2204		DATE 2/1/89	
.xxx ±.005		DATE 2/2/89		DATE 8-21-89	
ANGLE TOL ±%		DATE 2/2/89		DATE 8-21-89	
FINISH 80✓		DATE 2/2/89		DATE 8-21-89	
REMOVE ALL BURRS		DATE 2/2/89		DATE 8-21-89	
LET	REVISION	DATE	DRN	CHK	REL

