

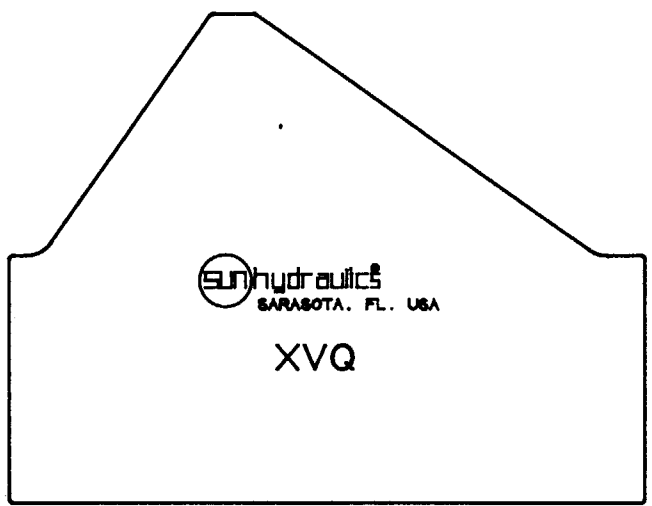


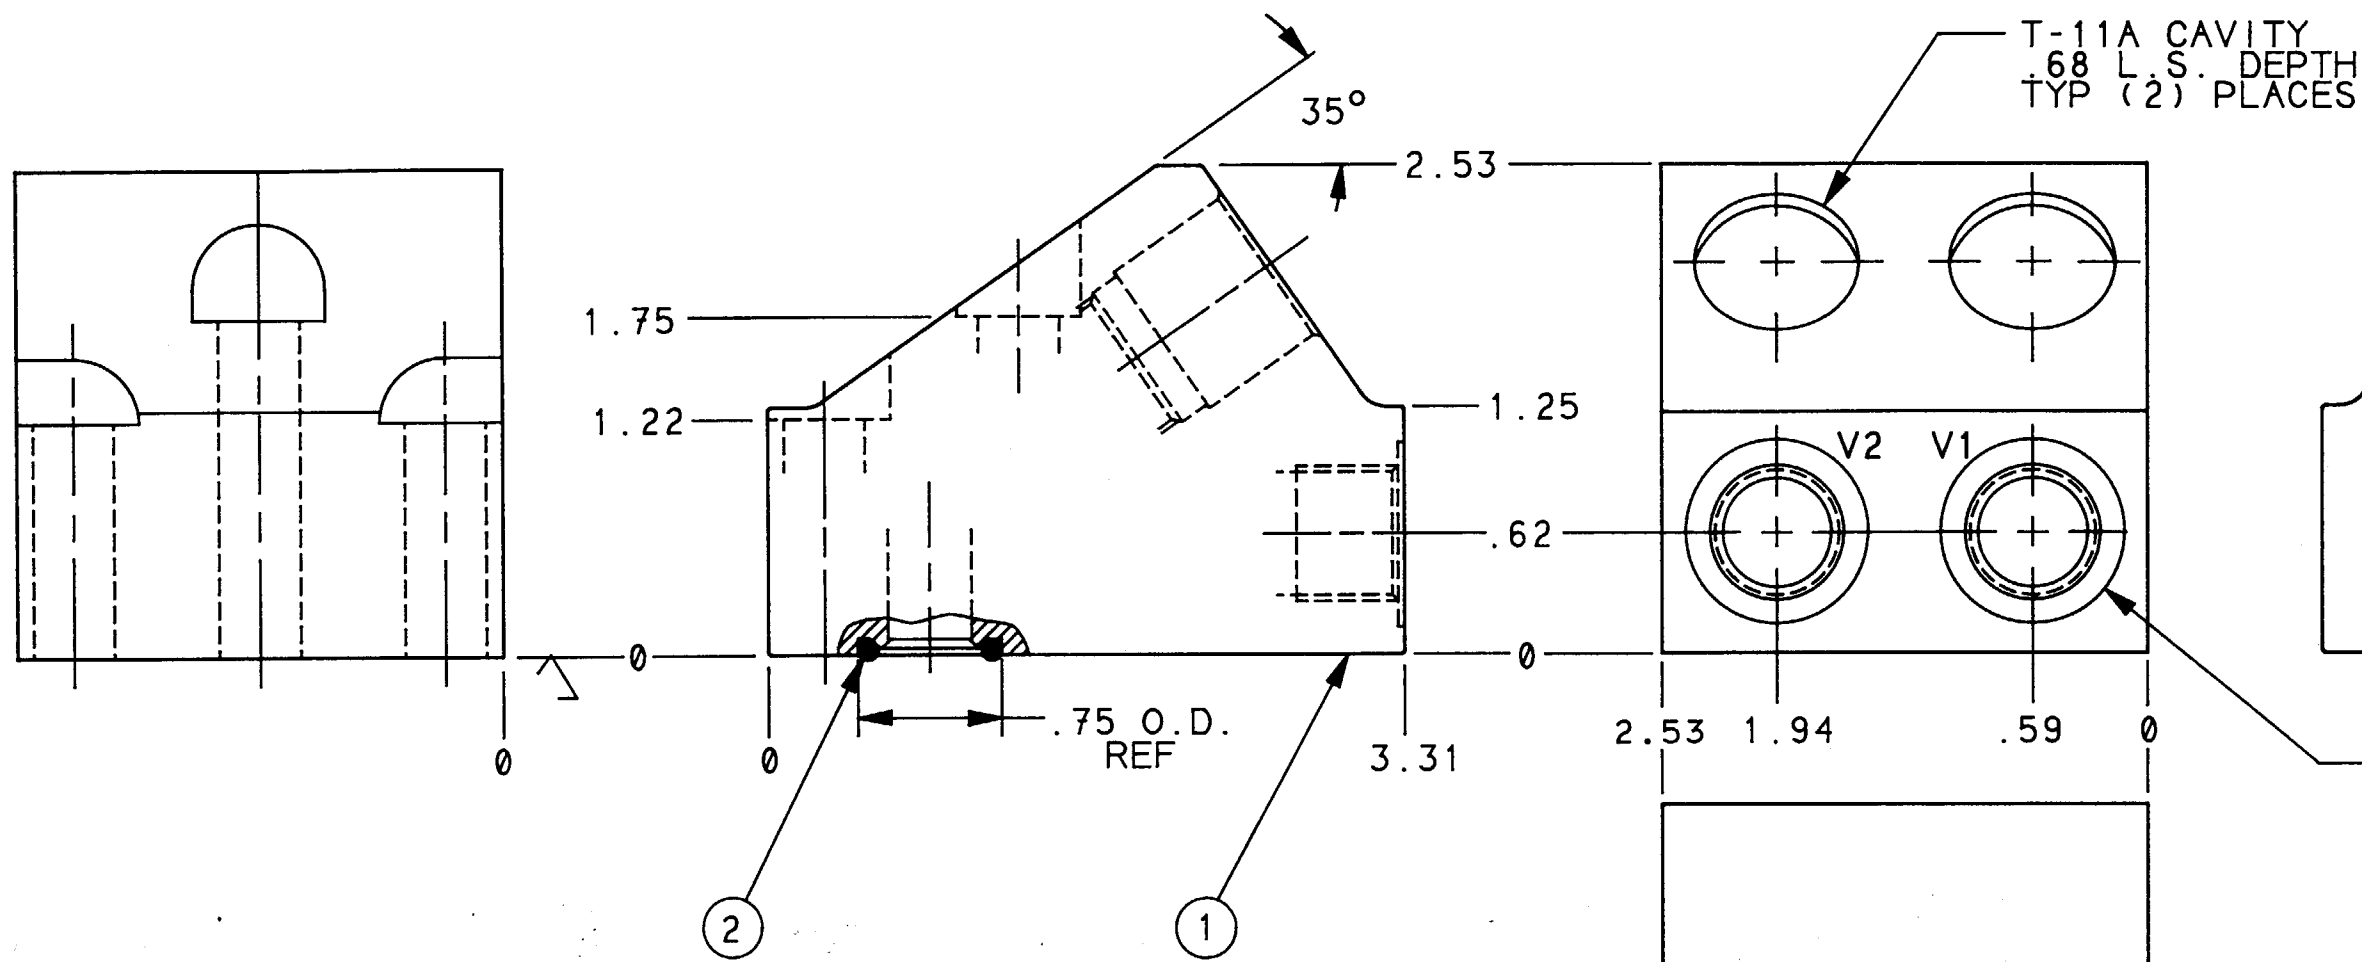

NOTES:

- 1) SEALS: BUNA-N
- 2) ALUMINUM BODIES-3000 PSI MAX. CONTINUOUS SERVICE PRESSURE.

C-BORED 69 DIA. FOR SOCKET HEAD CAP SCREW ON OPPOSITE FACE, .42 DIA. DR. THRU TYP. (3) PLACES

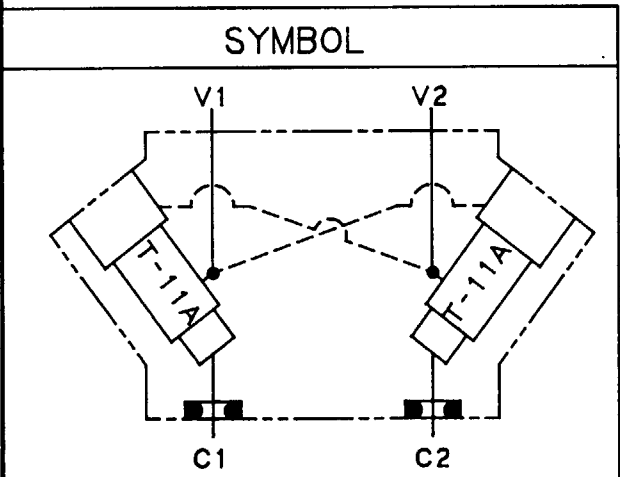

OUTLINE & ASSEMBLY					ITEM	PART NO.	PART NAME	QTY
2	500-001-113	FACE SEAL	2					
1	151-625-006	BODY	1					
UNLESS OTHERWISE SPECIFIED					TITLE GASKET MTD BODY-DUAL CROSS PILOTED T-11A CAVITIES			
DIMENSION TOL					SCALE REF. 1/1			
.x = ±.030					MATERIAL ALUMINUM BODY			
.xx = ±.015					HEAT TREAT & FINISH			
.xxx = ±.005					DRAWN BRS CHECK R/B RELEASE 2204			
ANGLE TOL ±%					DATE 2/1/89 DATE 2/2/89 DATE 8-21-89			
FINISH 80✓								
REMOVE ALL BURRS								
LET	REVISION	DATE	DRN	CHK	REL	REVISION PART NO. XVQ		

