

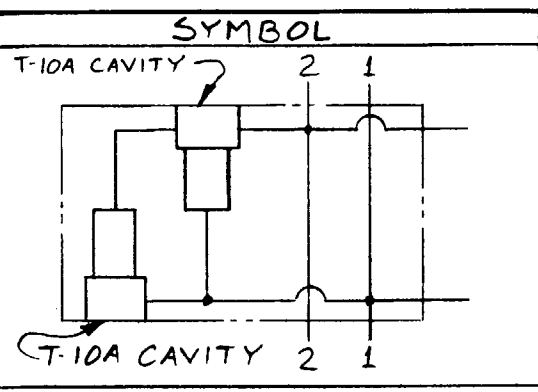


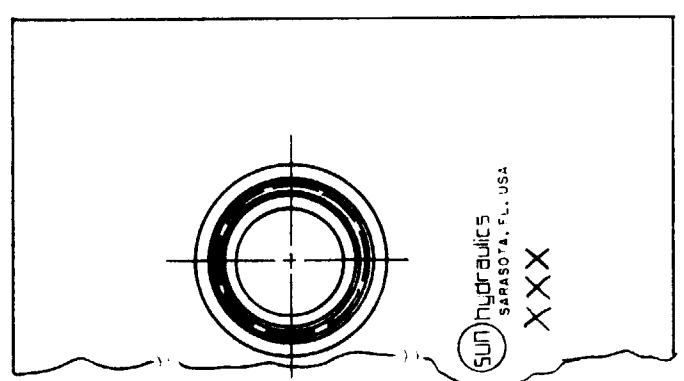

T-10A CAVITY
.375 L.S. DEPTH
(1) PLACE EACH END

1,000-11 BSPP PORT
TYP. (4) PLACES

.42 DIA. THRU
MT'G. HOLE
TYP. (6) PLACES

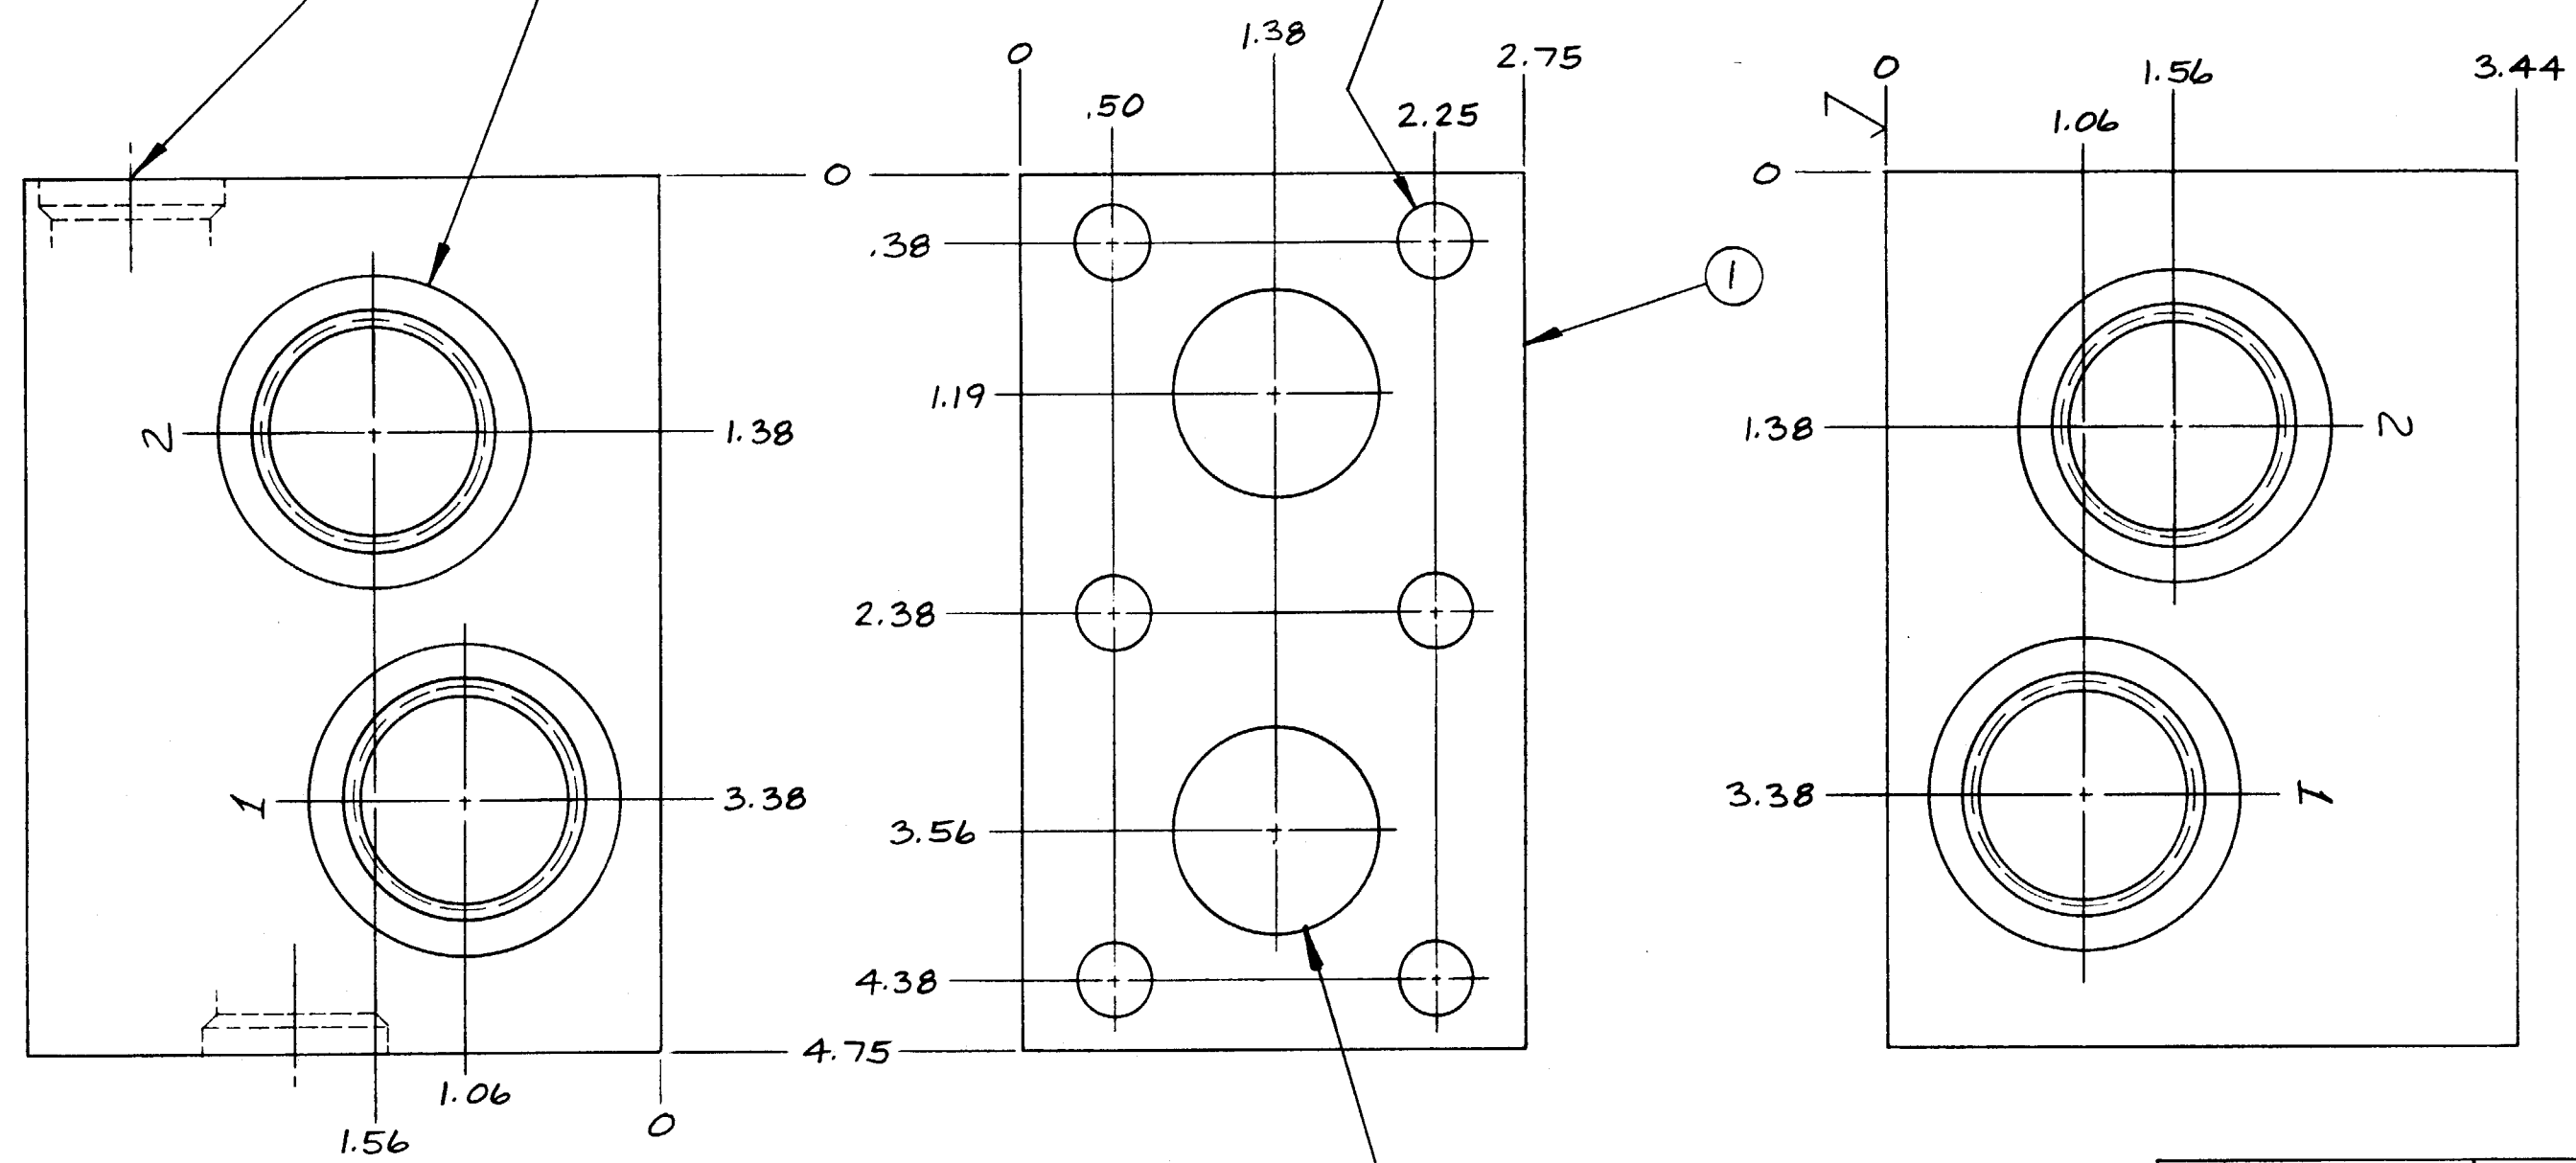

1.125 DIA. - TYP. (2) PLACES										1	151-595-006	BODY	1	
										ITEM	PART NO.	PART NAME	QTY	
										OUTLINE				
										TITLE DIRECT MOUNTED CROSS-PORT RELIEF BODY FOR STAFFA BO80/ CO80/B100/B125/C200 MOTORS	REVISION B	PART NO. XXX		
										SCALE 1:1	REF.	MATERIAL ALUMINUM		
										DRAWN DAS	CHECK R/B	RELEASE 1317	HEAT TREAT & FINISH 74	
										DATE 3-17-87	DATE 3/23/87	DATE 3-24-87		
										UNLESS OTHERWISE SPECIFIED				
										DIMENSION TOL				
										.X = ± .030				
										.XX = ± .015				
										.XXX = ± .005				
										ANGLE TOL ± 1°				
										FINISH 125V				
										REMOVE ALL BURRS				
B	.42 DIA. THRU WAS .41									7-9-90	DAS			
A	1.125 DIA. - 1.38 & WAS 1.50									5-27-88	DAS			
LET.	REVISION									DATE	DRN	CHK	REL	



sun hydraulics

CORPORATION

SARASOTA, FLORIDA

TELEPHONE 813/356-2983

C/R

