


SYMBOL

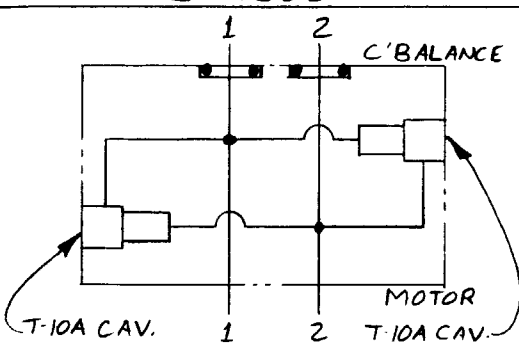

REVISION

PART NO.

XXZ

NOTE:

1). SEALS - VITON.


.41 DIA. THRU
MT'G. HOLE
TYP. (6) PLACES

T-10A CAVITY
.375 L.S. DEPTH
(1) PLACE EACH END

1.75
DIA. REF.
TYP.

2

.875 DIA. THRU
TYP. (2) PLACES

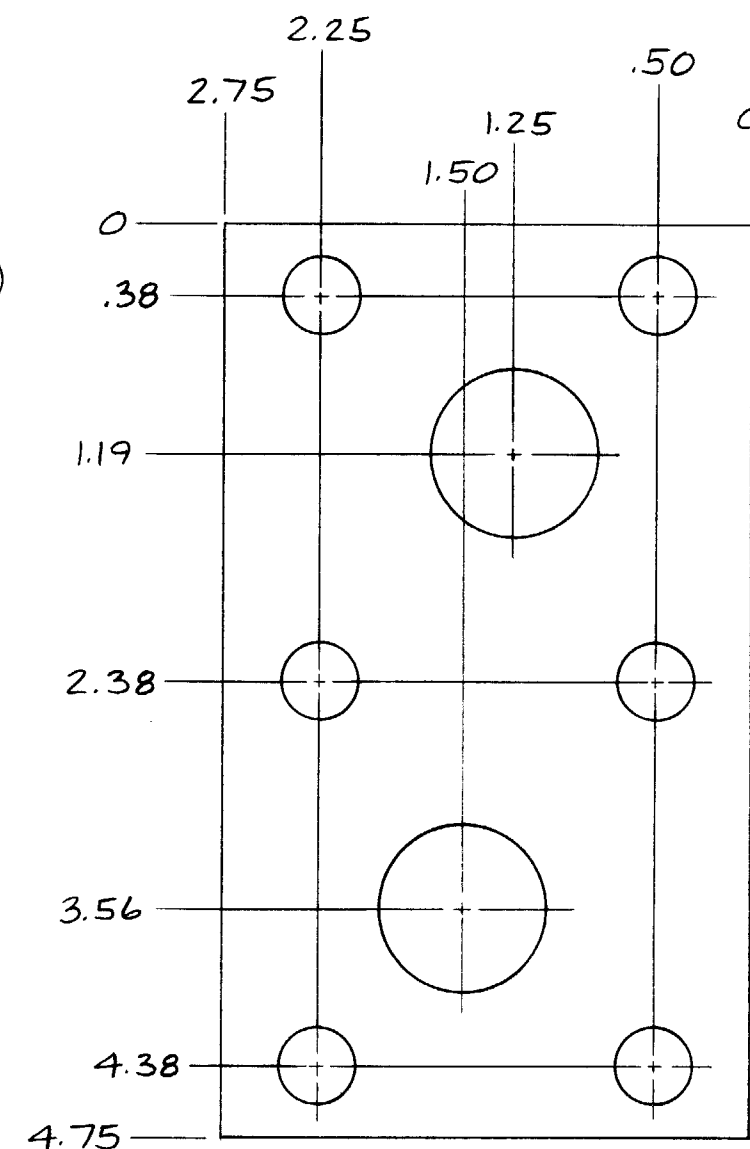

2	500-101-222	O-RING	2
1	151-596	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE

REVISION

PART NO.

XXZ

UNLESS
OTHERWISE
SPECIFIED

DIMENSION TOL
.x = ± .030
.xx = ± .015
.xxx = ± .005

ANGLE TOL. ± 1°
FINISH 125 V
REMOVE ALL
BURRS

TITLE DIRECT MTD. CROSS-PORT RELIEF
BODY FOR USE UNDER C' BAL. VALVE
ON STAFFA B080/C080/B100/B125/C200

SCALE

REF.

1:1

DRAWN

CHECK

RELEASE

DATE

DATE

DATE

3-17-87

3-23-87

3-24-87

MATERIAL

ALUMINUM

HEAT TREAT & FINISH

~H

SUN hydraulics
CORPORATION

SARASOTA, FLORIDA
TELEPHONE 813/355-2983

LET.	REVISION	DATE	DRN	CHK	REL

SUN hydraulics
SARASOTA, FL. USA
XXZ