
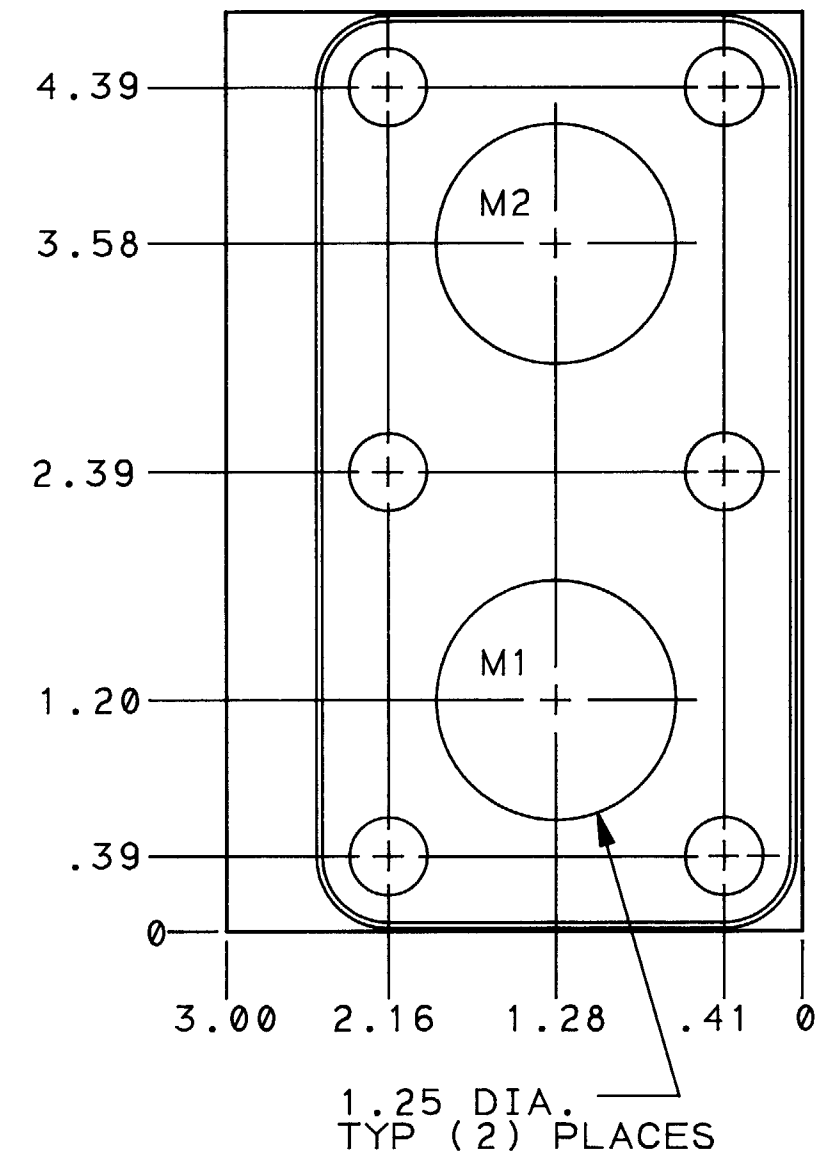



REVISION	PART NO.	XYD
----------	----------	-----

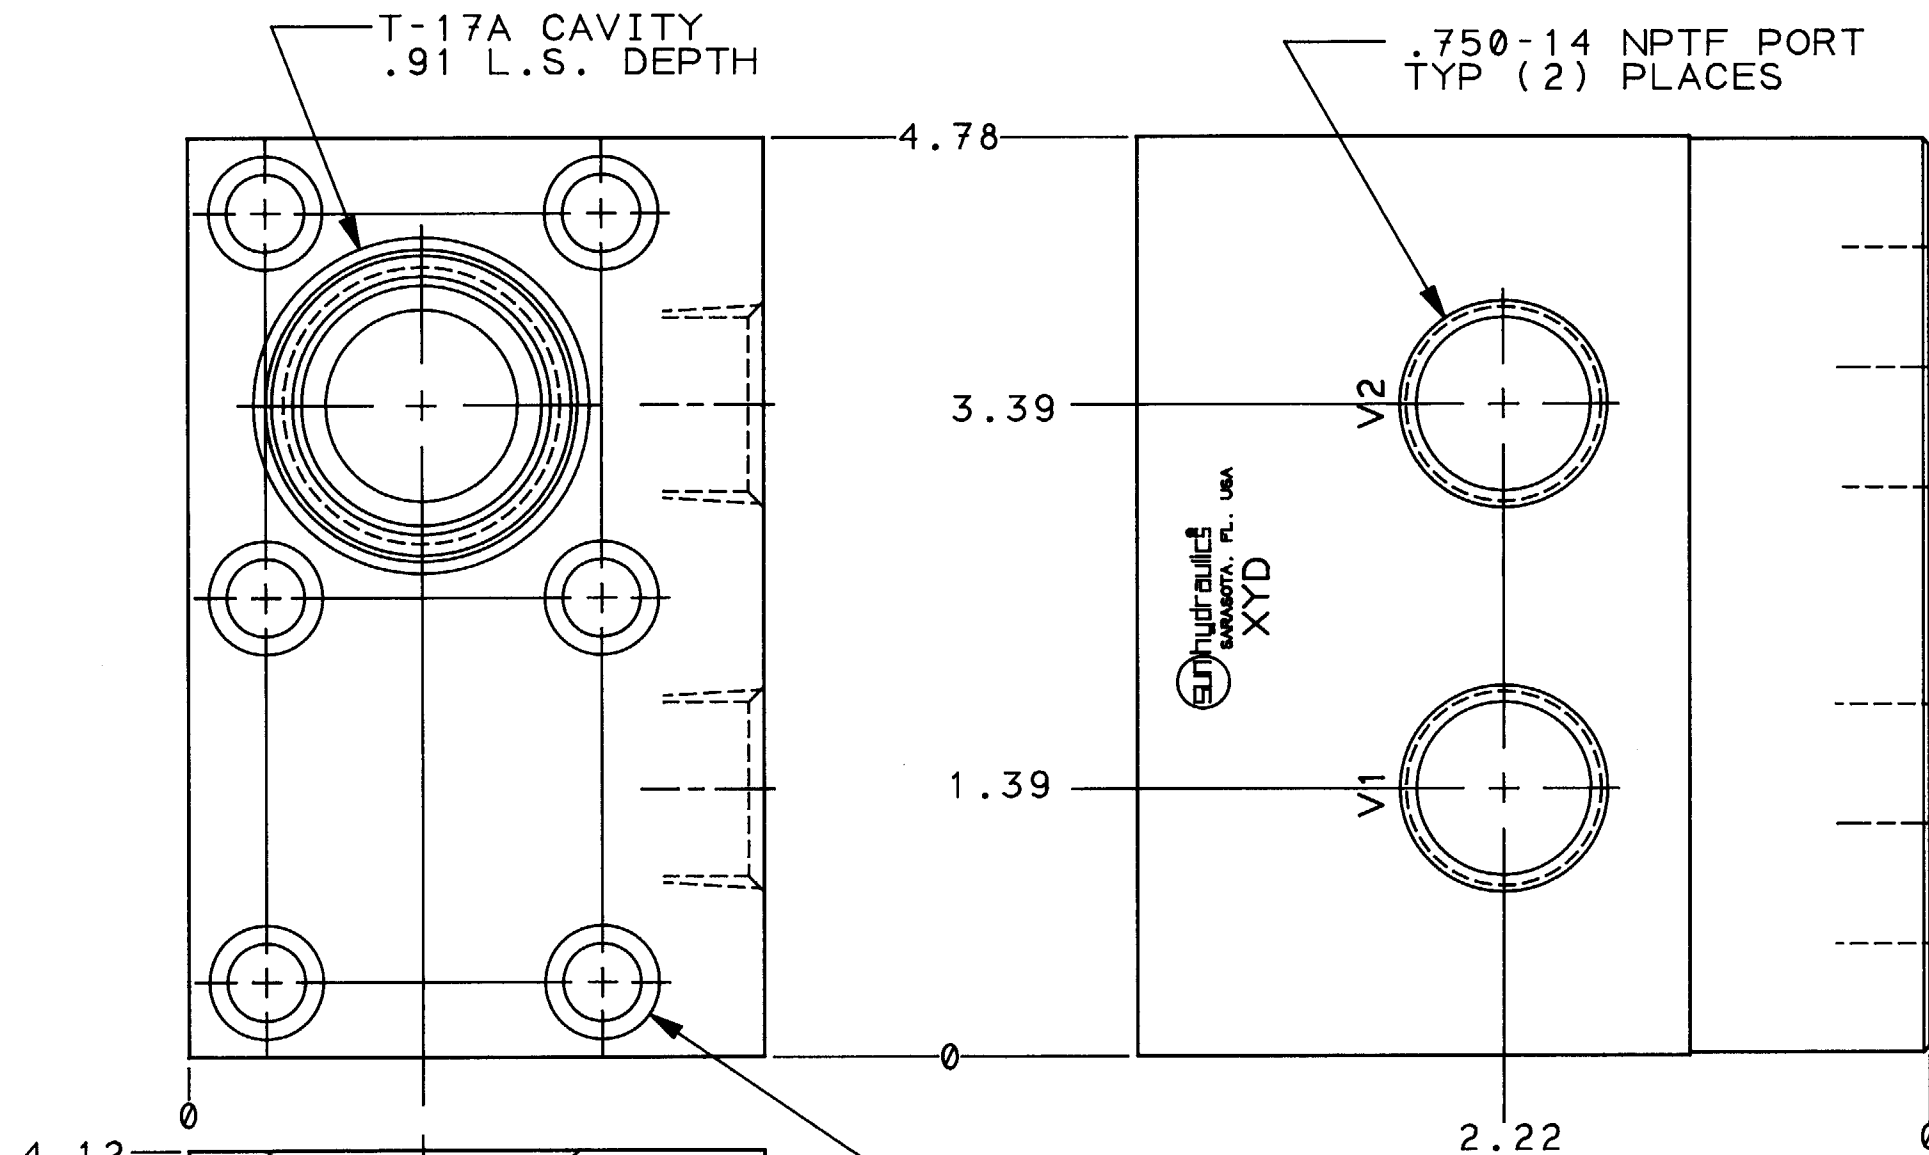

-.41 DIA. THRU
C'BORED .59 DIA.
x .69 DP.
TYP (6) PLACES

NOTES :

1) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
2) FOR OTHER OPTIONS SEE OPTION
SHEET.

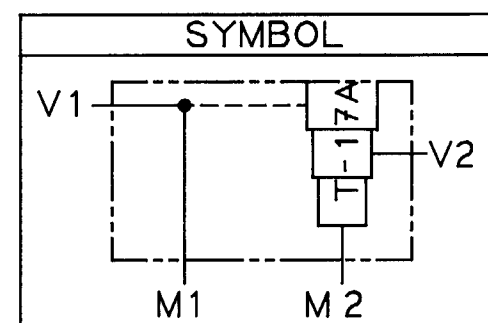

LET	REVISION	DATE	DRN	CHK

	UNLESS OTHERWISE SPECIFIED
--	----------------------------

DIMENSION TOL
.X = ±.030
.XX = ±.015
.XXX = ±.005
ANGLE TOL ± 1/2°
FINISH 80✓
REMOVE ALL
BURRS

OUTLINE & ASSEMBLY

TITLE	DIRECT STAFFA 4"BORE/ 5 PISTON MOTOR MOUNTED SINGLE T-17A CAVITY
-------	--

SCALE

REF

 $1 = 1$

1

100

[illegible]

Abstract

DRAWN
B.D.

F	C
---	---

**CHECK
P/A**

DATE	01/01/2000
------	------------

2	
	2

14

DATE
7/20

407

DATE 1/21/2014

1	MATERIAL
---	----------

Δ1111

ALC	
ALC	

HEAT TREATING

1/

1	152-146-001	BODY	1
ITEM	PART NO.	PART NAME	QTY

REVISION	PART NO.	XYD
----------	----------	-----

