
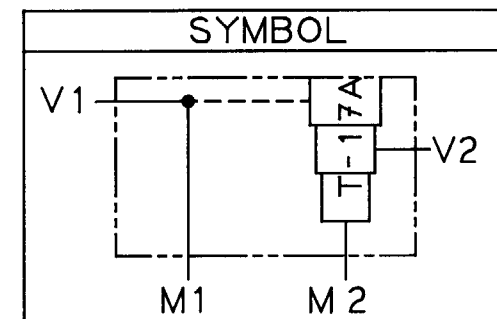
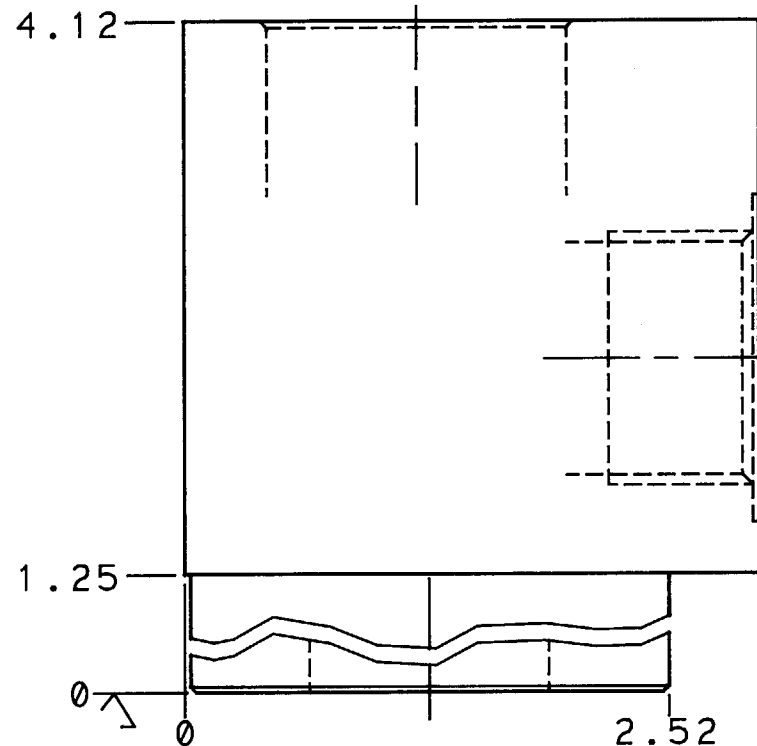
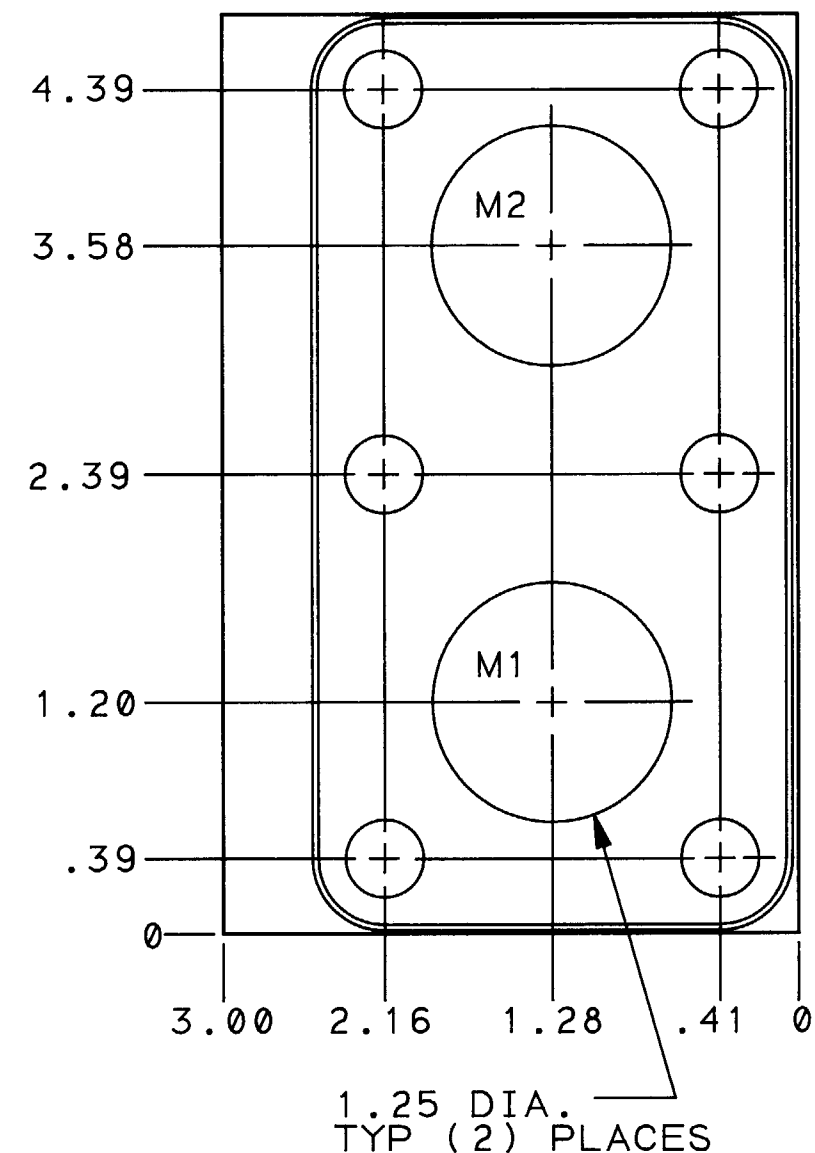


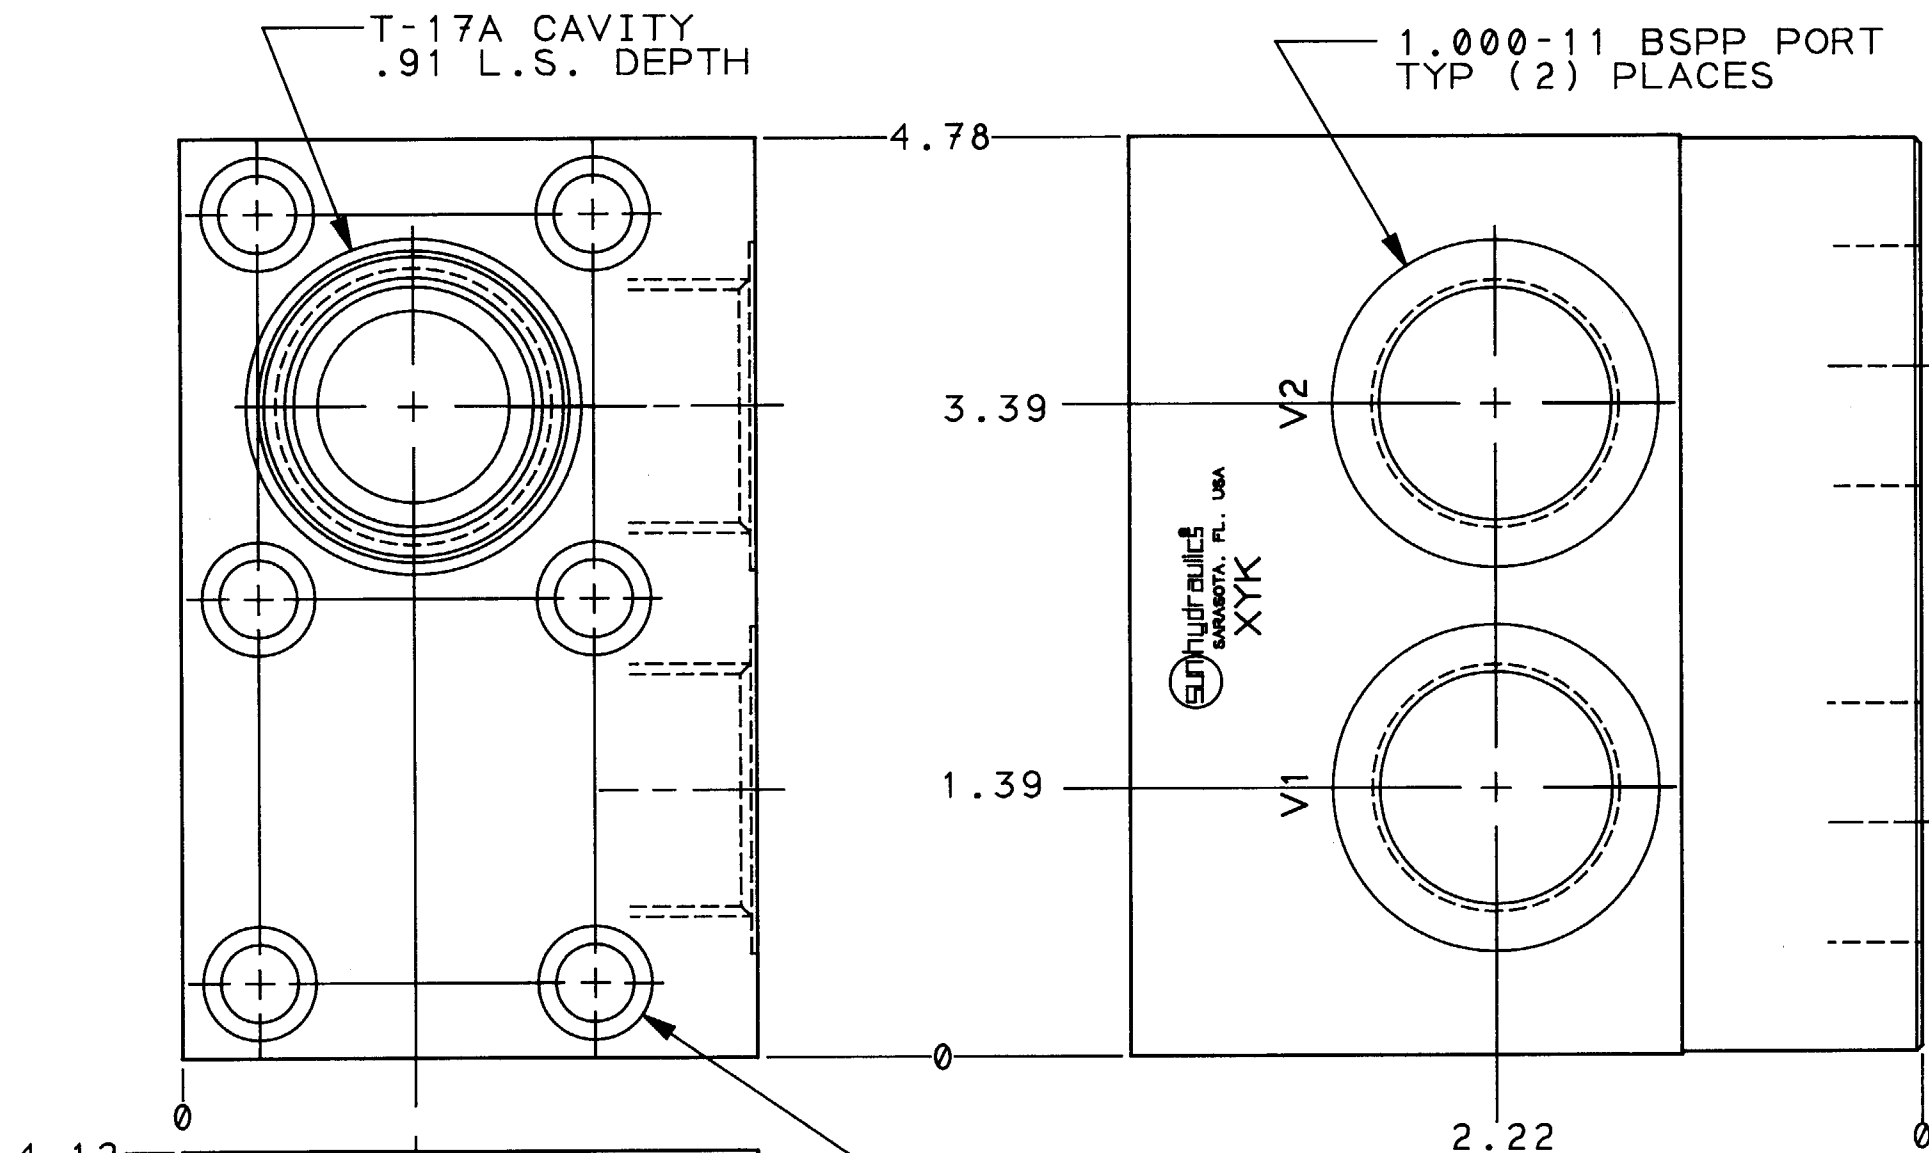

- NOTES:
- 1) ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.
 - 2) FOR OTHER OPTIONS SEE OPTION SHEET.

LET				REVISION				DATE				DRN CHK REL			
UNLESS OTHERWISE SPECIFIED				TITLE				SCALE				REF.			
DIMENSION TOL				DIRECT STAFFA 4" BORE / 5 PISTON MOTOR MOUNTED SINGLE T-17A CAVITY				1 = 1				MATERIAL			
.x = ±.030				DRAWN				BR5				ALUMINUM			
.xx = ±.015				CHECK				R/B				HEAT TREAT & FINISH			
.xxx = ±.005				RELEASE				2180							
ANGLE TOL ±%				DATE				7/24/89							
FINISH 80✓				DATE				7/25/89							
REMOVE ALL BURRS				DATE				8-1-89							

1	152-146-006	BODY	1
ITEM	PART NO.	PART NAME	QTY

REVISION	PART NO.	XYK
SUN hydraulics CORPORATION		
1500 UNIVERSITY PARKWAY		
SARASOTA, FLORIDA 34243, USA		
TELEPHONE (813) 355-2983		