

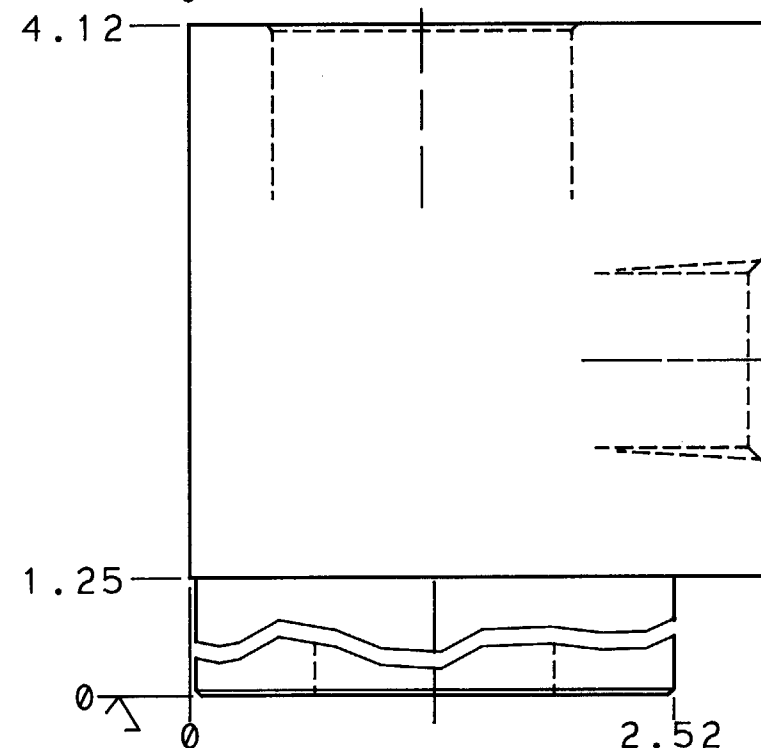
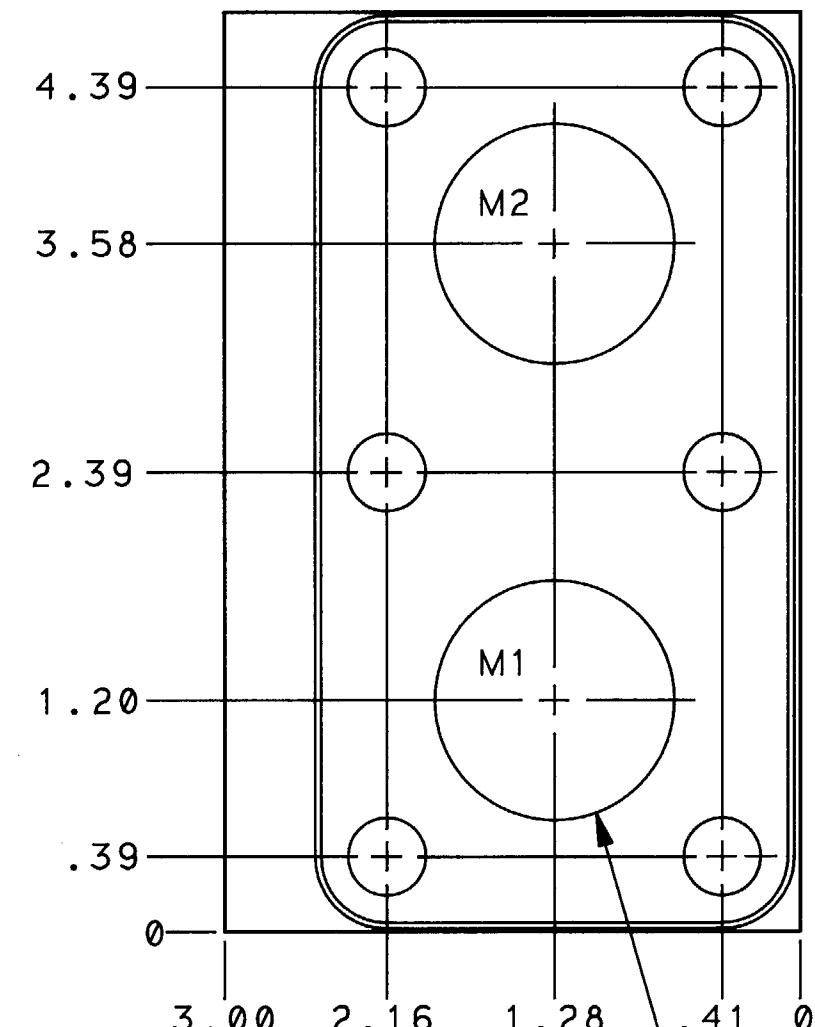


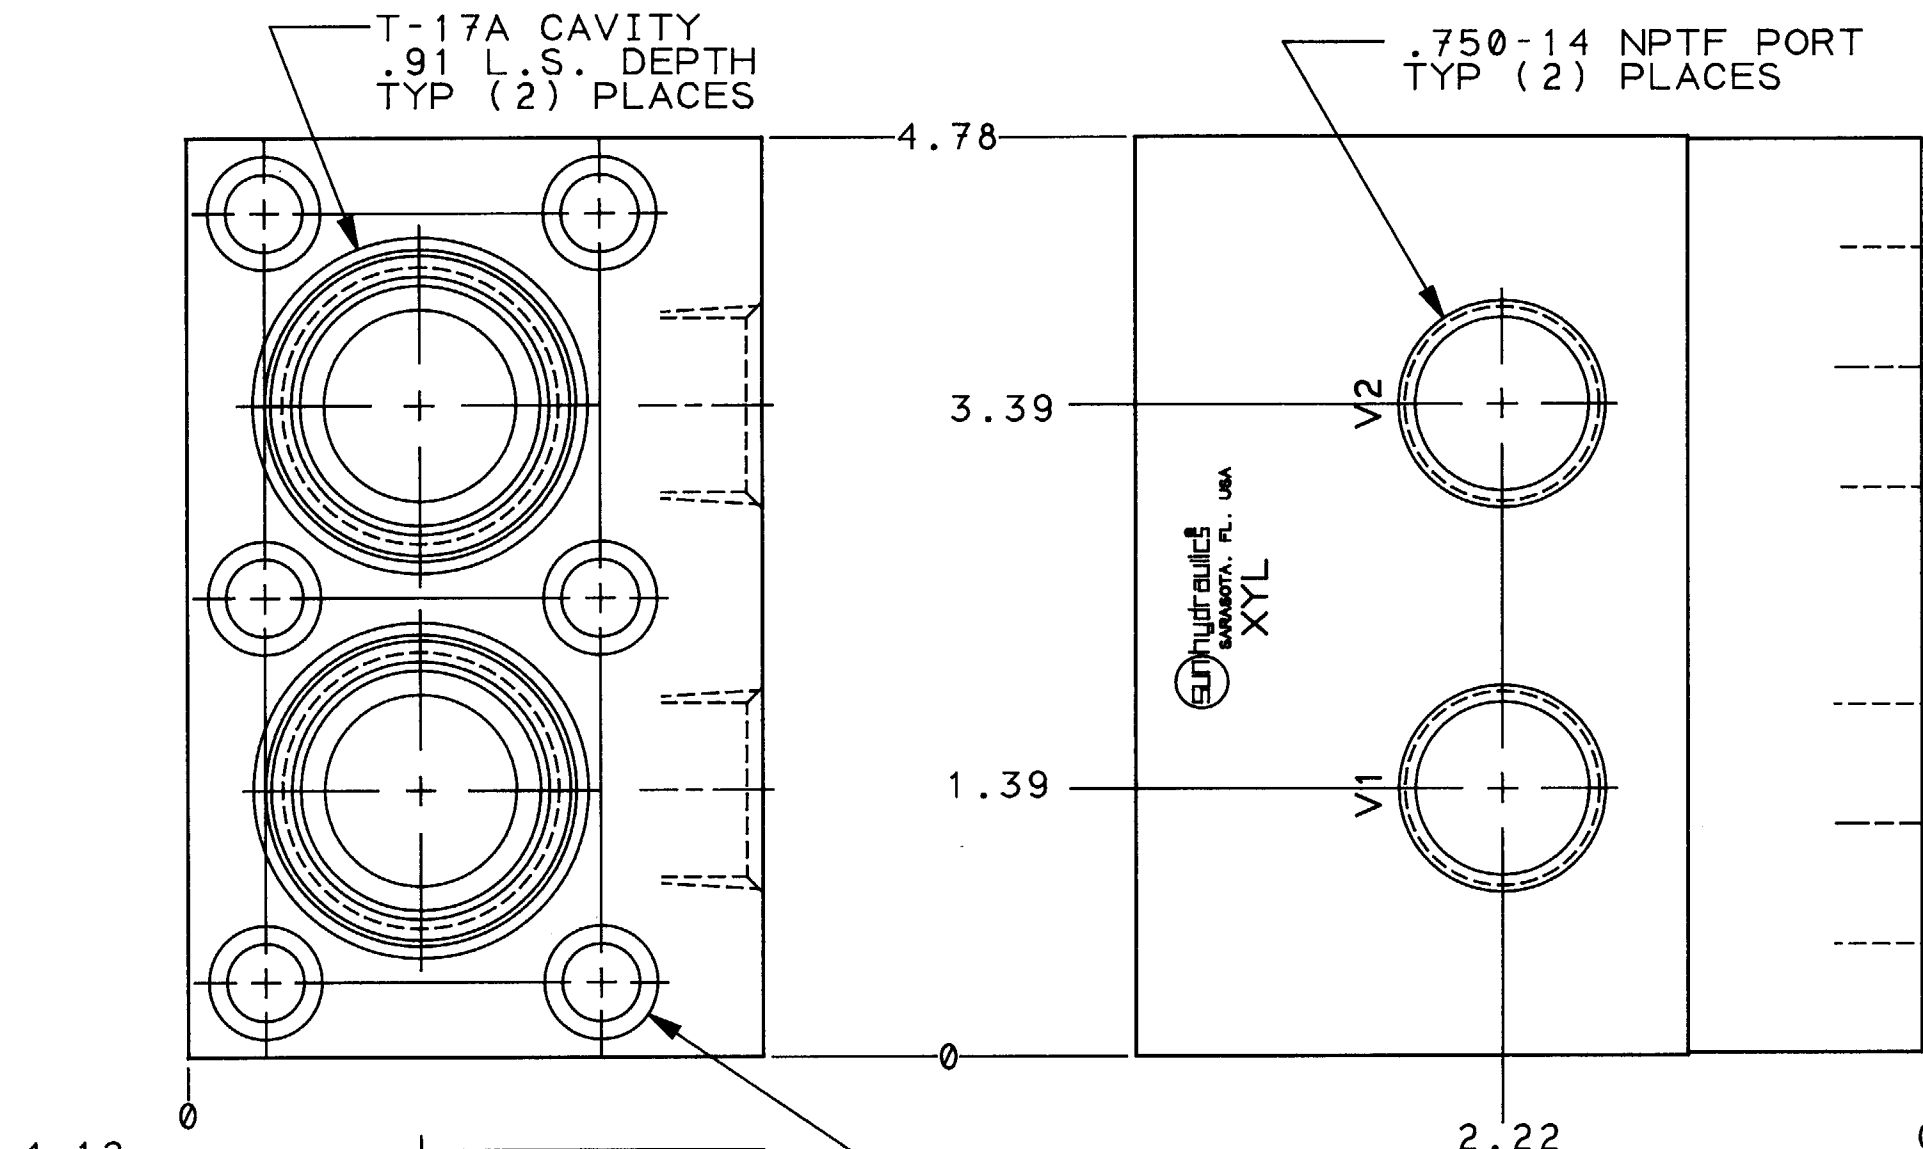

.41 DIA. THRU
C'BORED .59 DIA.
x .69 DP.
TYP (6) PLACES

NOTES:

- 1) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
- 2) FOR OTHER OPTIONS SEE OPTION
SHEET.

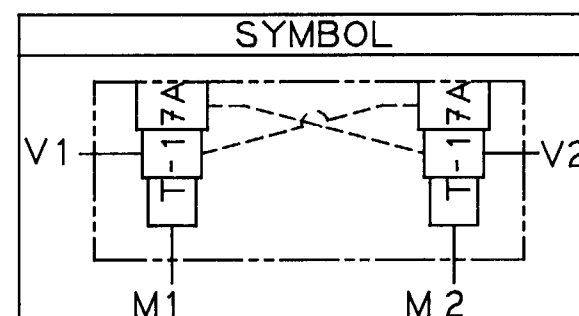

LET	REVISION	DATE	DRN	CHK	REL

UNLESS
OTHERWISE
SPECIFIED

DIMENSION TOL
.x = ±.030
.xx = ±.015
.xxx = ±.005
ANGLE TOL ±½
FINISH 80✓
REMOVE ALL
BURRS

OUTLINE & ASSEMBLY

TITLE	DIRECT STAFFA 4"BORE/ 5 PISTON MOTOR MOUNTED DUAL T-17-A CAVITIES		
SCALE	REF.	MATERIAL	
1 = 1		ALUMINUM	
DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH
BRS	R/B	2180	
DATE	DATE	DATE	
7/20/89	7/21/89	8-1-89	

1	152-144-001	BODY	1
ITEM	PART NO.	PART NAME	QTY

REVISION PART NO. XYL

SUN hydraulics
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983