
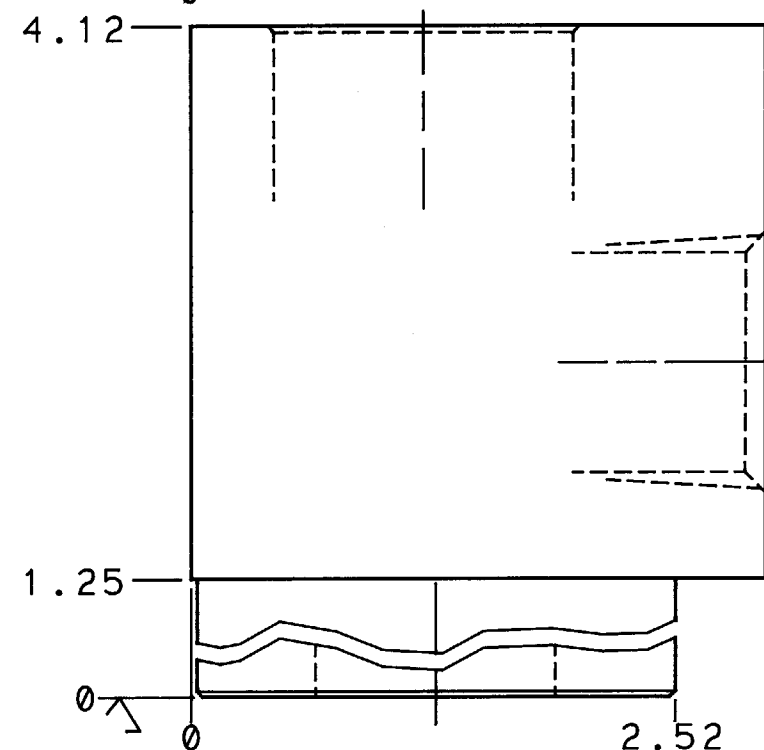
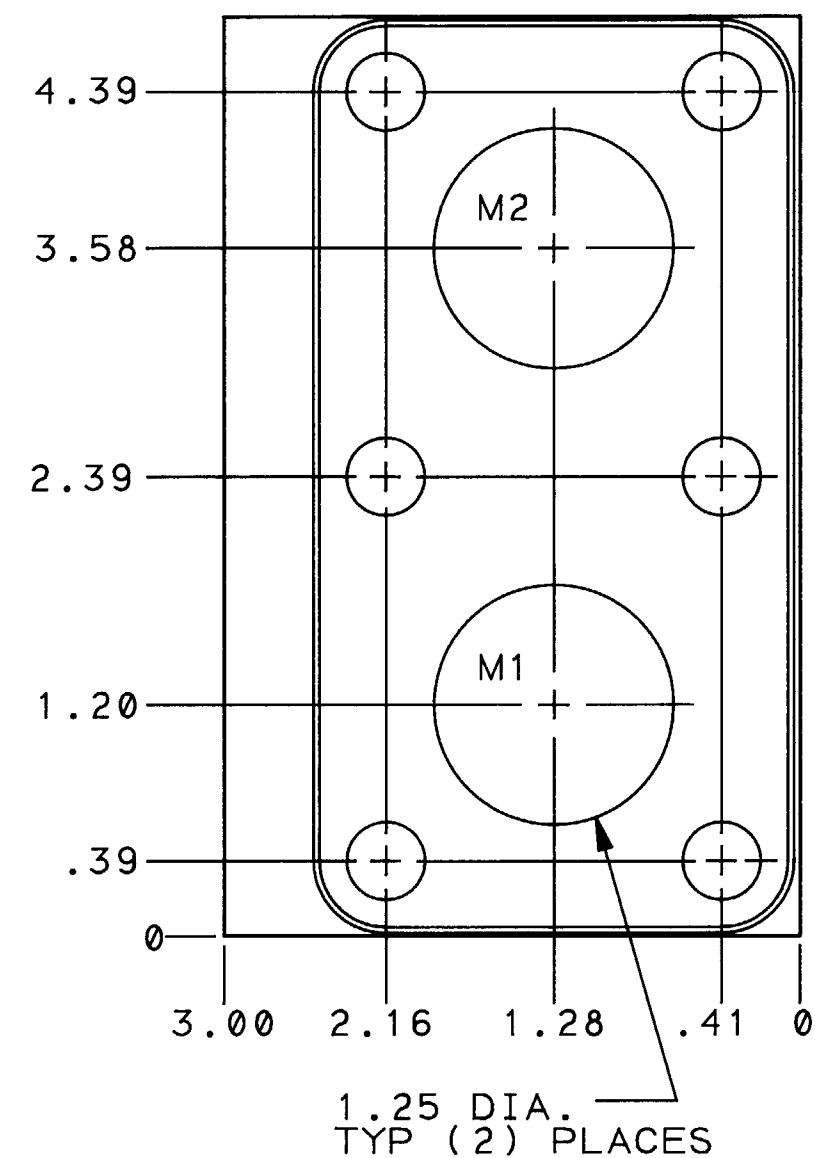



REVISION	PART NO.	XYM
----------	----------	-----

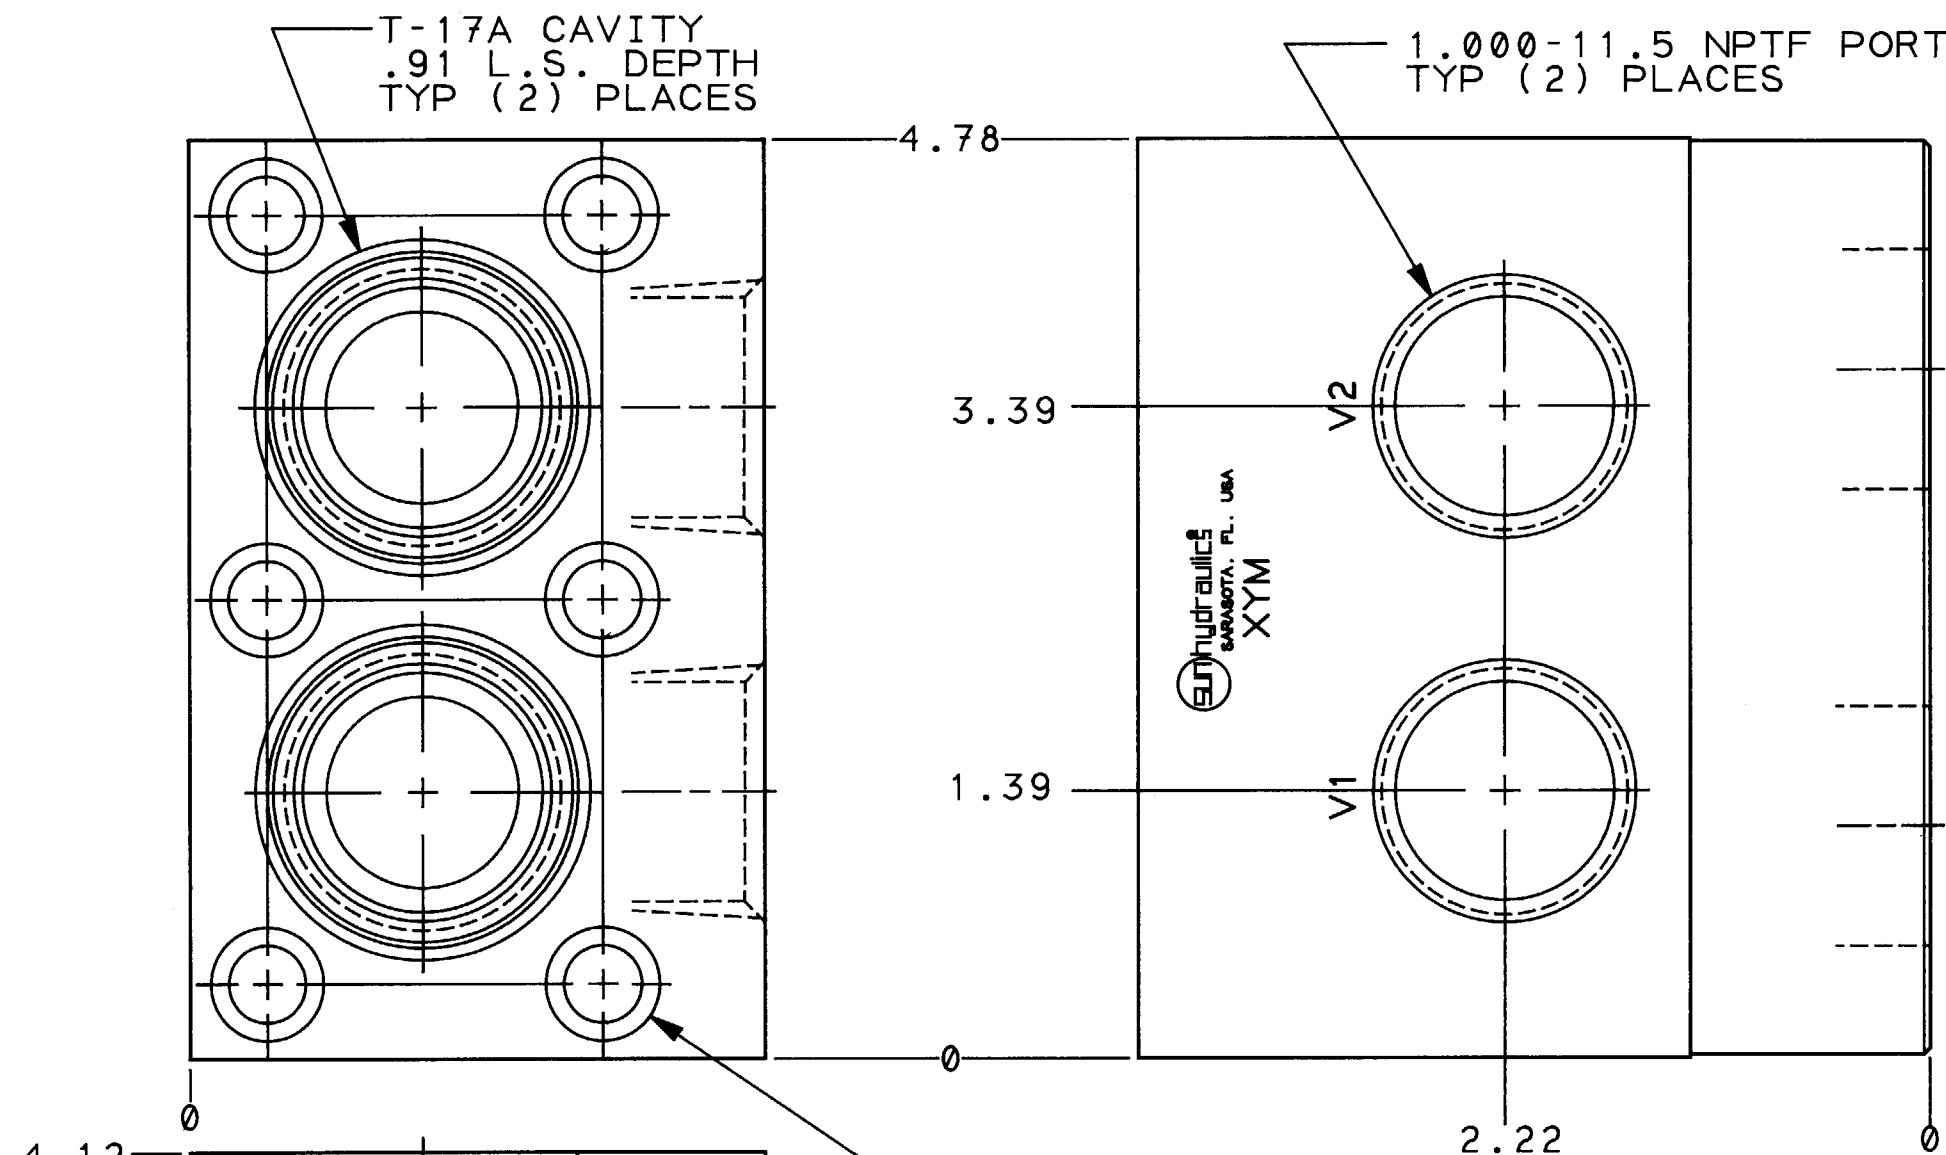

-.41 DIA. THRU
C'BORED .59 DIA.
x .69 DP.
TYP (6) PLACES

NOTES :

1) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
2) FOR OTHER OPTIONS SEE OPTION
SHEET.

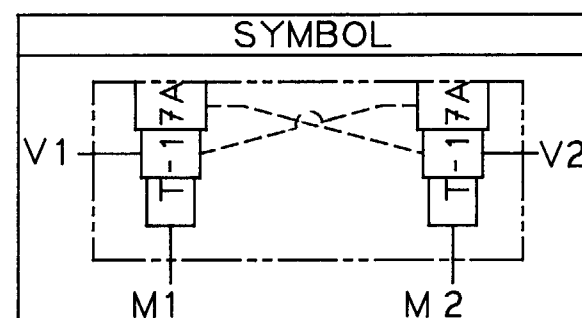

LET	REVISION	DATE	DRN	CHK	RE

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x = ±.03
.xx = ±.01
.xxx = ±.00
ANGLE TOL ±
FINISH 80-
REMOVE ALL
BURRS

OUTLINE & ASSEMBLY

TITLE	DIRECT STAFFA 4"BORE/ 5 PISTON MOTOR MOUNTED DUAL T-17A CAVITIES
-------	--

SCALE		REF.	
1 = 1			
DRAWN	CHECK	RELEASE	
<i>BR5</i>	<i>R/B</i>	2180	
DATE	DATE	DATE	
7/20/89	7/21/89	8-1-89	

MATERIAL	ALUMINUM
HEAT TREAT & FINISH	

1	152-144-002	BODY	1
ITEM	PART NO.	PART NAME	QTY

REVISION	PART NO.	XYM
----------	----------	-----

