

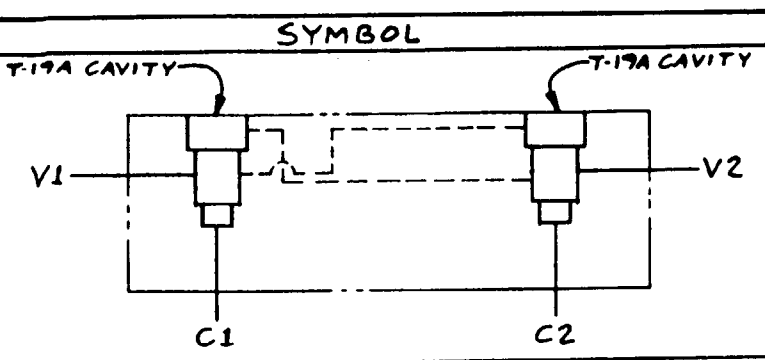
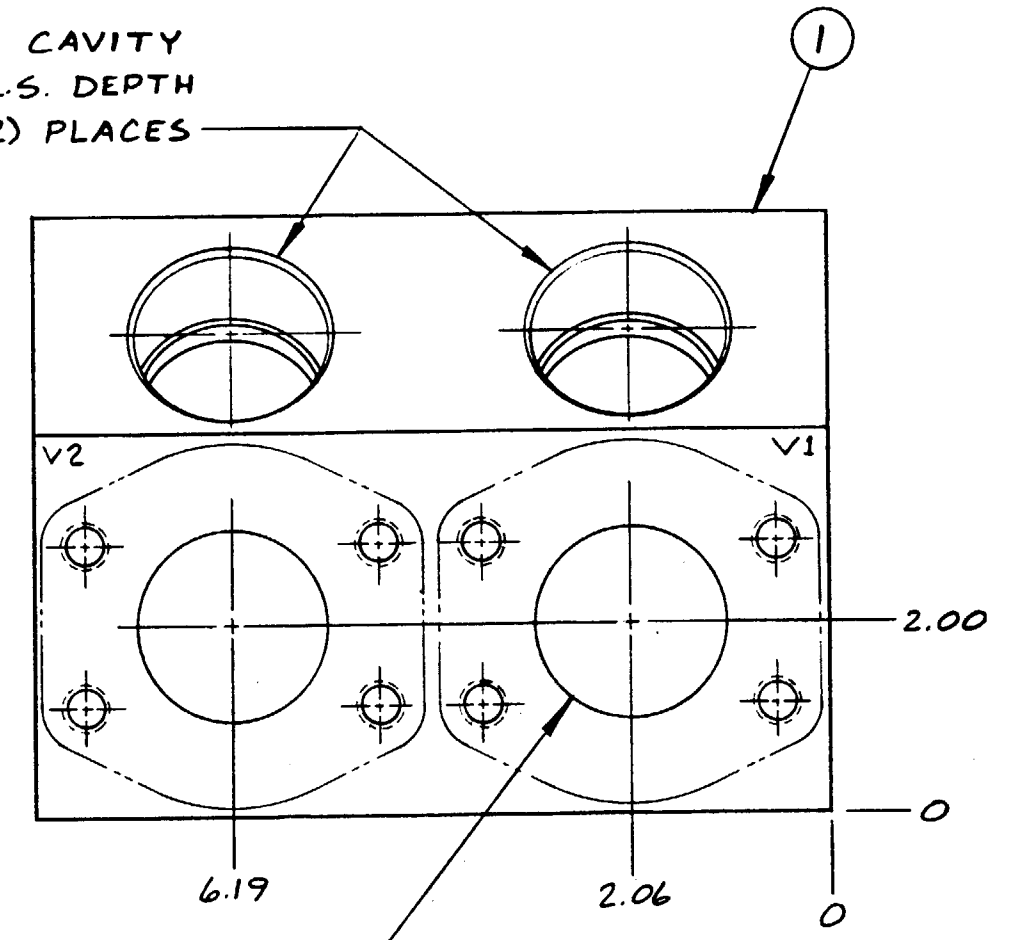


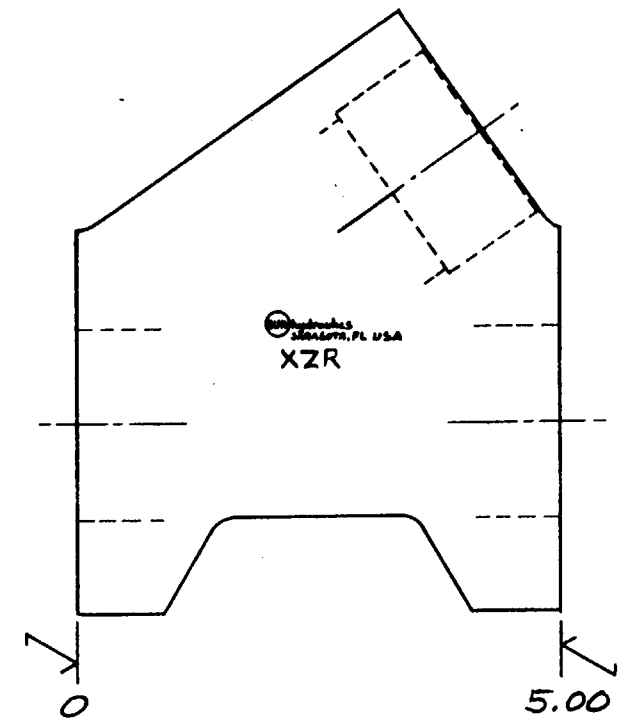


.500-13 UNC X 1.06 DP.
TYP. (16) PLACES

T-19A CAVITY
1.156 L.S. DEPTH
TYP. (2) PLACES

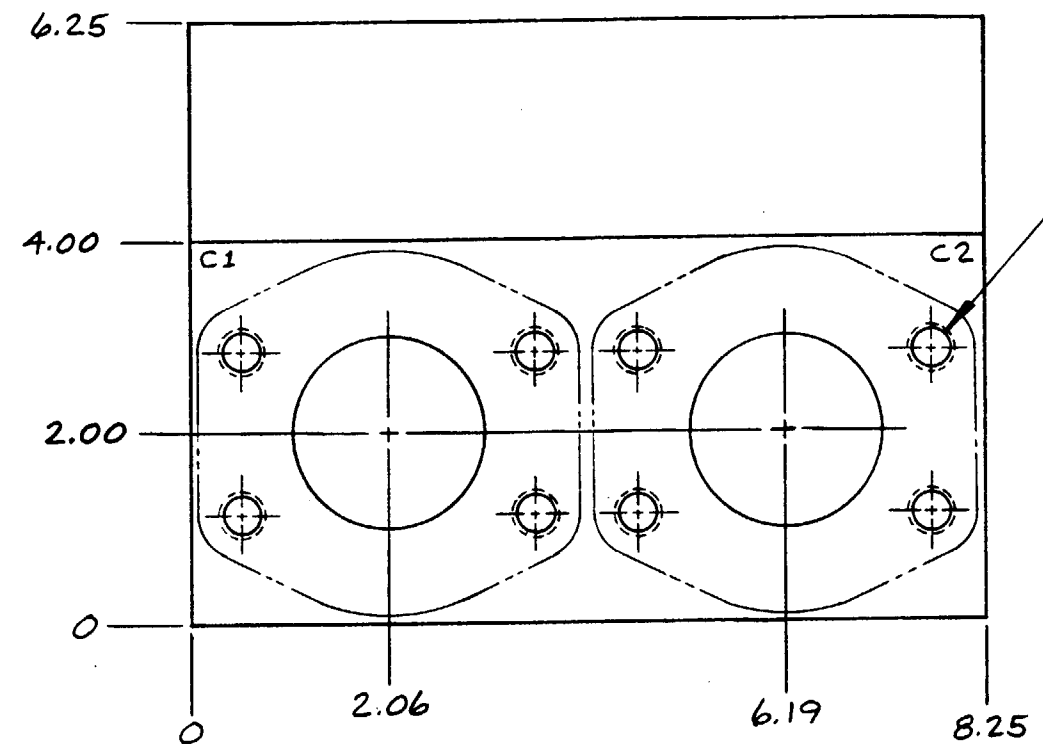

2.000 ST'D. PRESSURE SAE
(4) BOLT FLANGE PATTERN
TYP. (4) PLACES

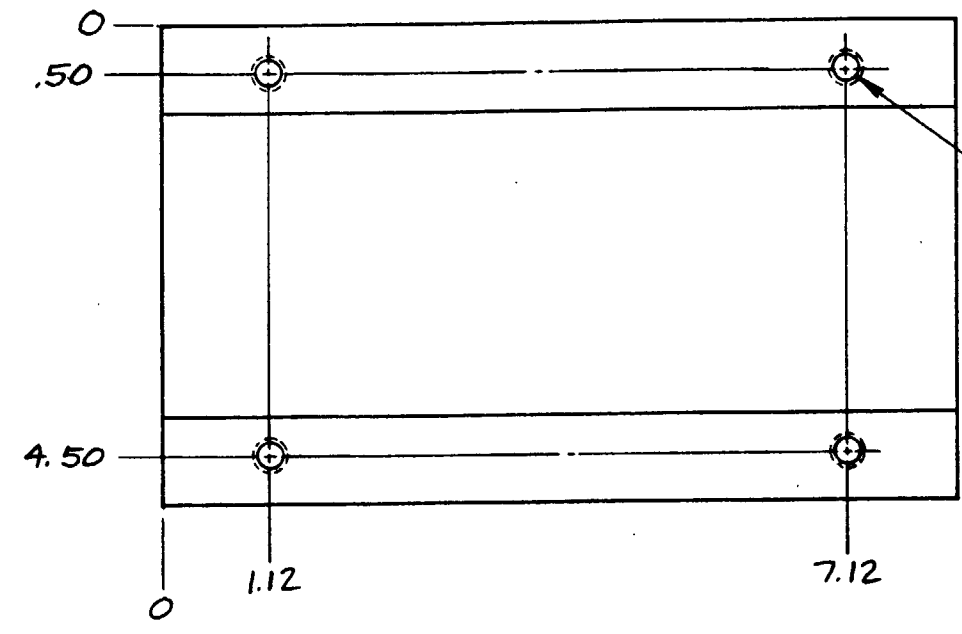

MOUNTING PROVISIONS -
.375-16 UNC X .88 DP.
TYP. (4) PLACES

UNLESS OTHERWISE SPECIFIED		TITLE BODY-LINE MT'D. CROSS-PILOTED T-19A CAV'S-2.000 SAE 4-BOLT FLANGE		REVISIONPART NO.	
DIMENSION TOL .X = ± .030 .XX = ± .015 .XXX = ± .005		SCALE REF. 1/2		MATERIAL ALUMINUM	
ANGLE TOL ± 1° FINISH 125 V REMOVE ALL BURRS		DRAWN CHECK RELEASE DAS RJB 1033		HEAT TREAT & FINISH N	
DATE 3-25-86		DATE 3/25/86		DATE 3-25-86	
LET.	REVISION	DATE	DRN	CHK	REL

1	151-424	BODY	1
ITEM	PART NO.	PART NAME	QTY

REVISIONPART NO.

XZR

SUN

hydraulics

CORPORATION

SARASOTA, FLORIDA
TELEPHONE 813/356-2983

C/F