


SYMBOL

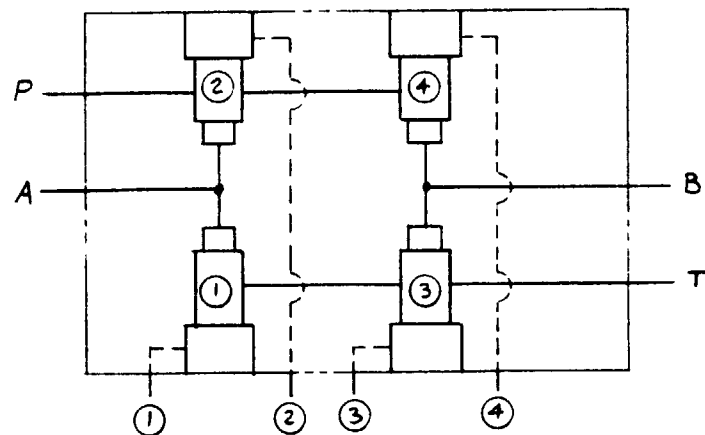

REVISION

PART NO.


YPZ

T-2A CAVITY
.719 L.S. DEPTH
TYP. (4) PLACES

MOUNTING PROVISION:
.375-16 UNC X .62 DP
TYP. (2) PLACES

.250-18 NPTF PORT
TYP. (4) PLACES

.375-18 NPTF PORT
TYP. (4) PLACES

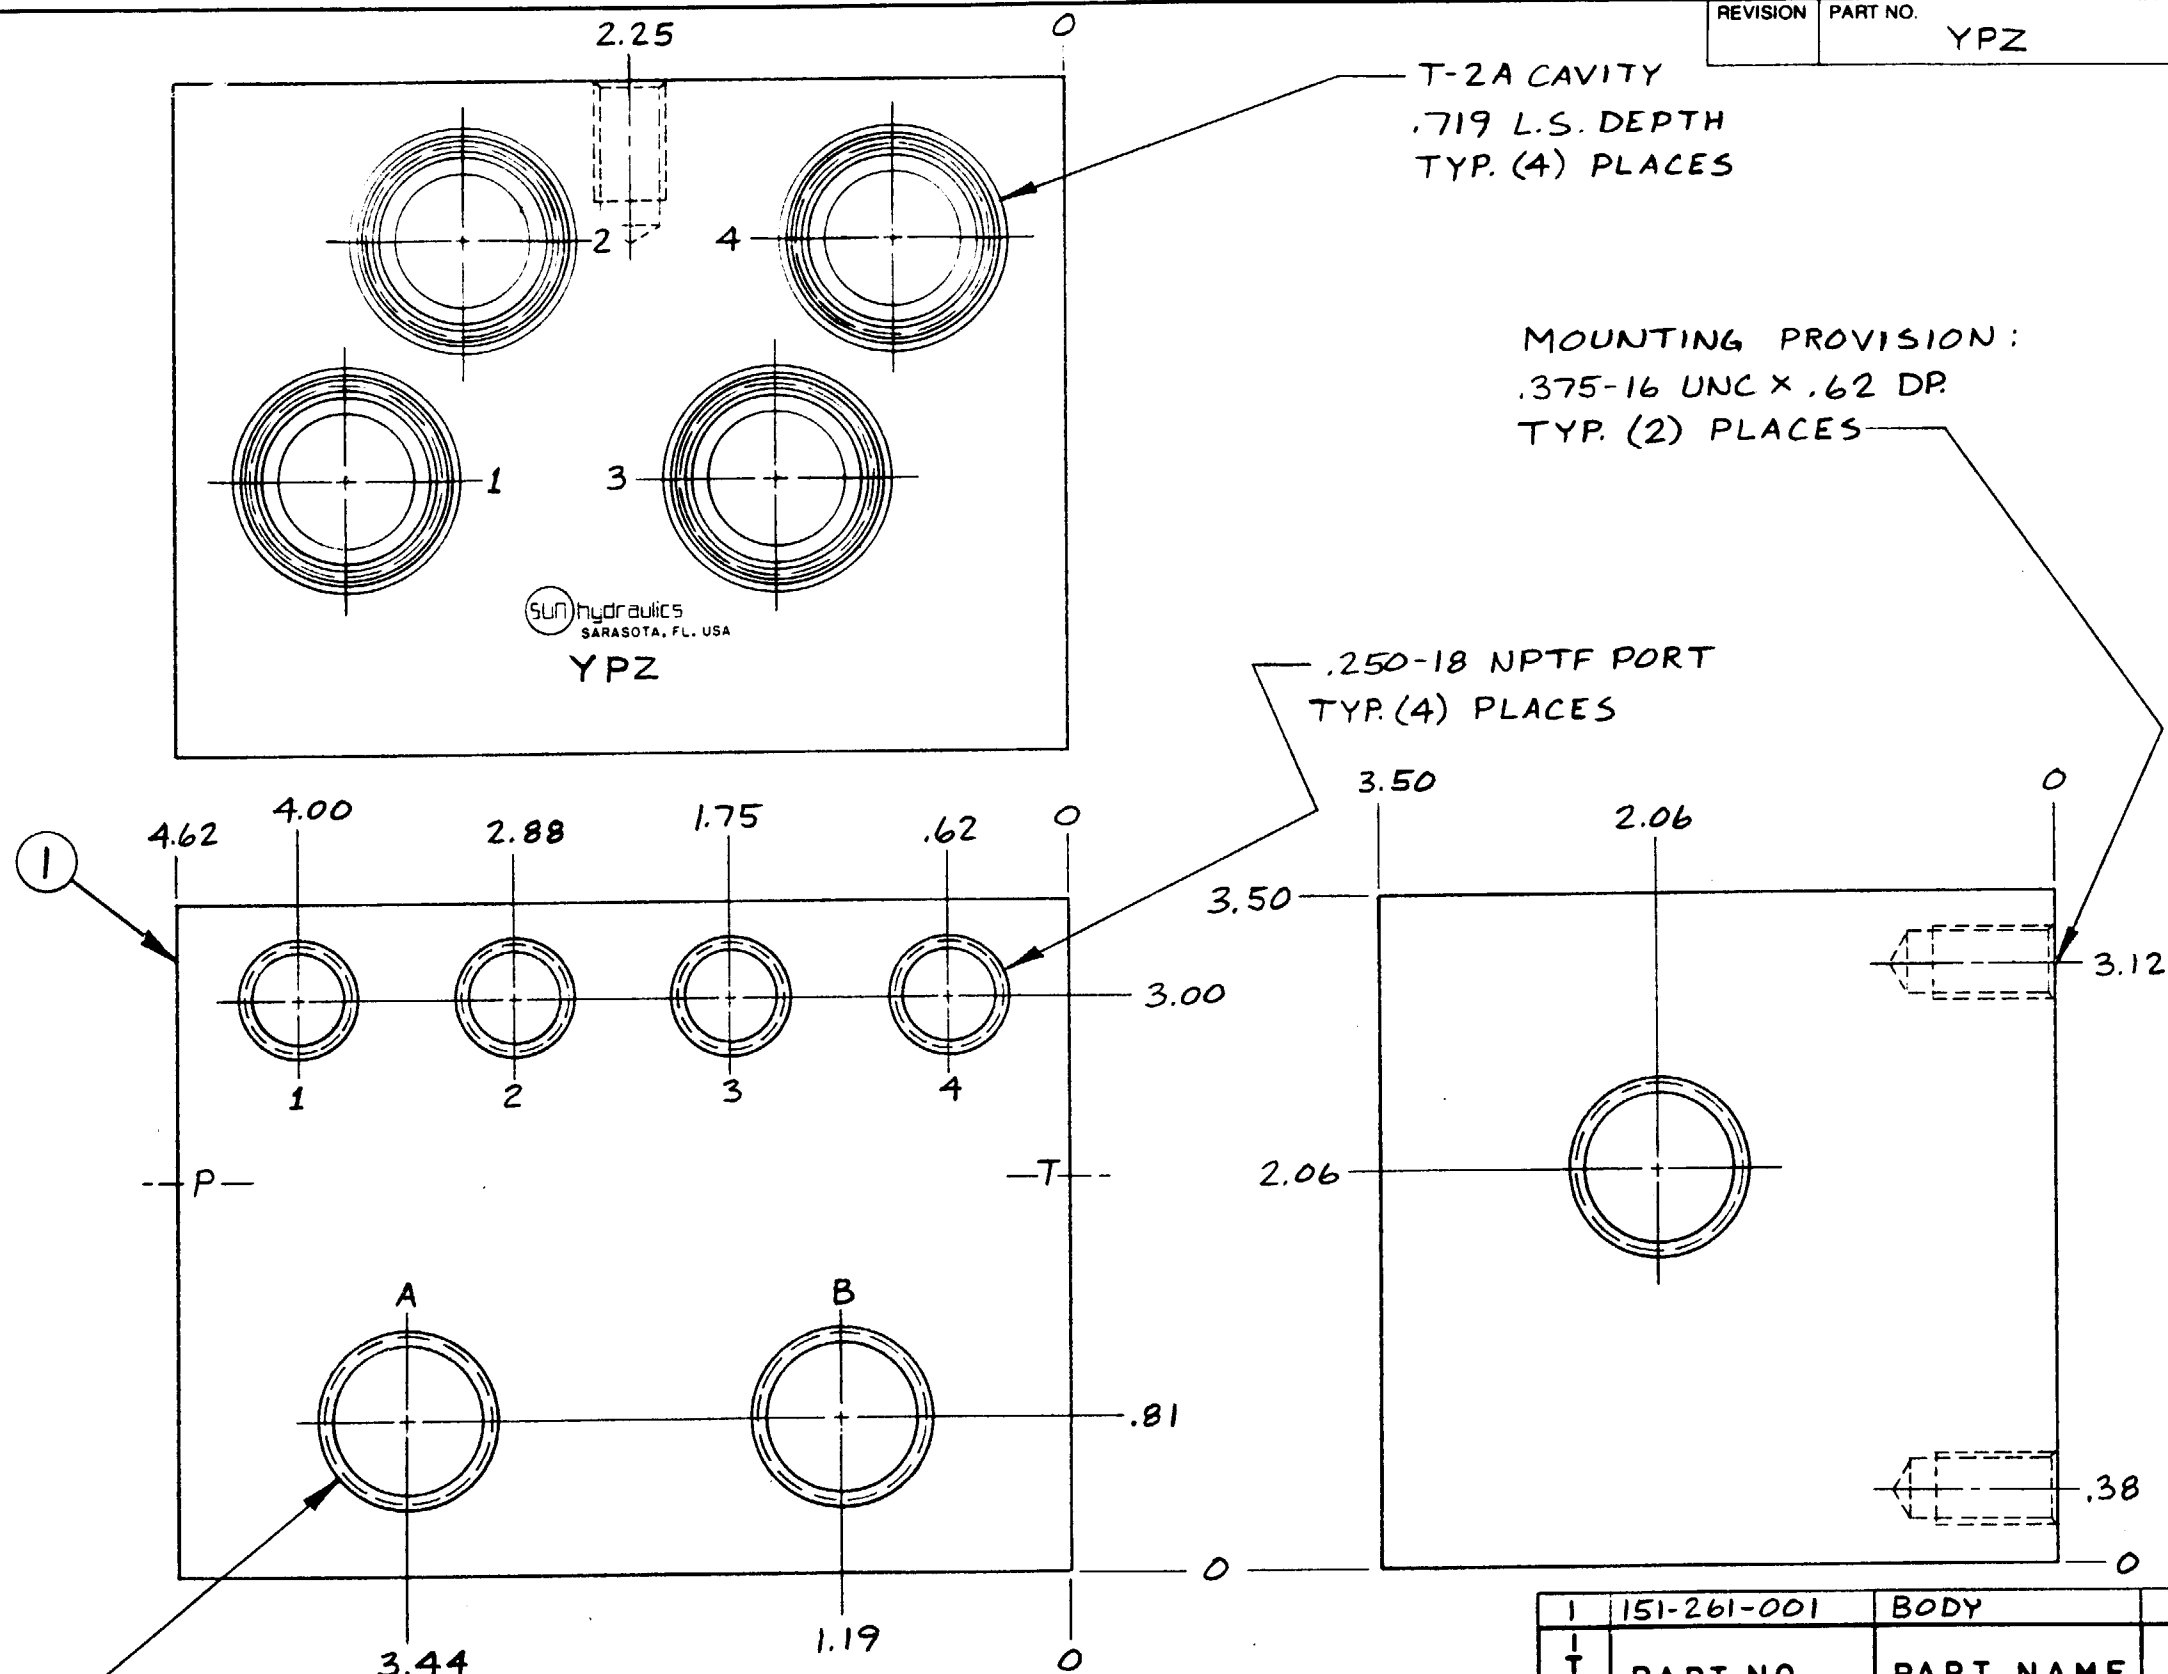

1	151-261-001	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE

TITLE 4-CAV. 4-WAY DIRECTIONAL
VALVE CIRCUIT T-2A CAV.

REVISION

PART NO.

YPZ

UNLESS
OTHERWISE
SPECIFIED

DIMENSION TOL
.X = ± .030
.XX = ± .015
.XXX = ± .005

ANGLE TOL. ± 1°
FINISH 125 V
REMOVE ALL
BURRS

SCALE

1:1

REF.

DRAWN

DAS

CHECK

RJB

RELEASE

DATE

3-5-86

DATE

DATE

MATERIAL

ALUMINUM

HEAT TREAT & FINISH

H

SUN hydraulics
CORPORATION

SARASOTA, FLORIDA
TELEPHONE 813-355-2983

LET.	REVISION	DATE	DRN	CHK	REL