

REVISION	PART NO.
	YQD

SYMBOL

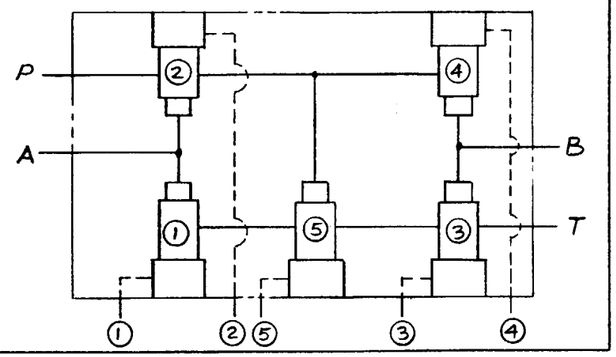


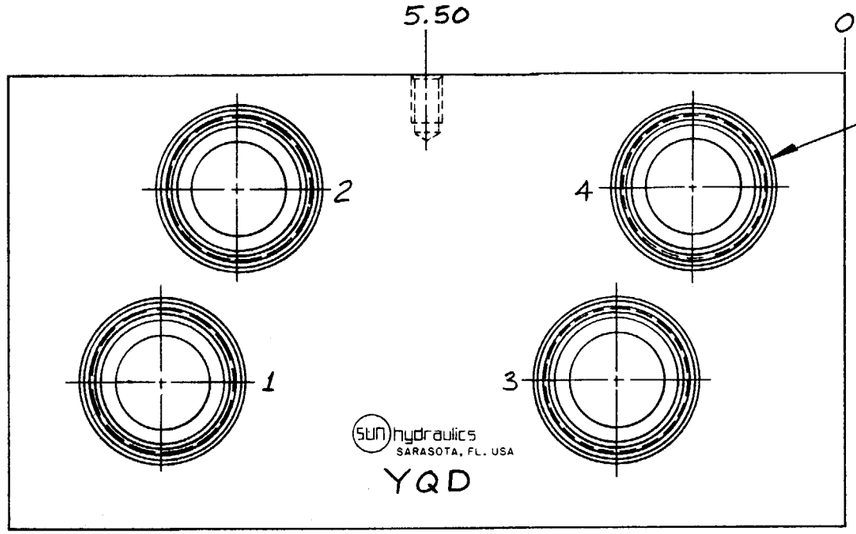

MOUNTING PROVISION:
.375-16 UNC x .62 DP.
TYP. (2) PLACES

.500-13 UNC x 1.06 DP.
TYP. (16) PLACES

SAE-6 PORT
TYP. (5) PLACES

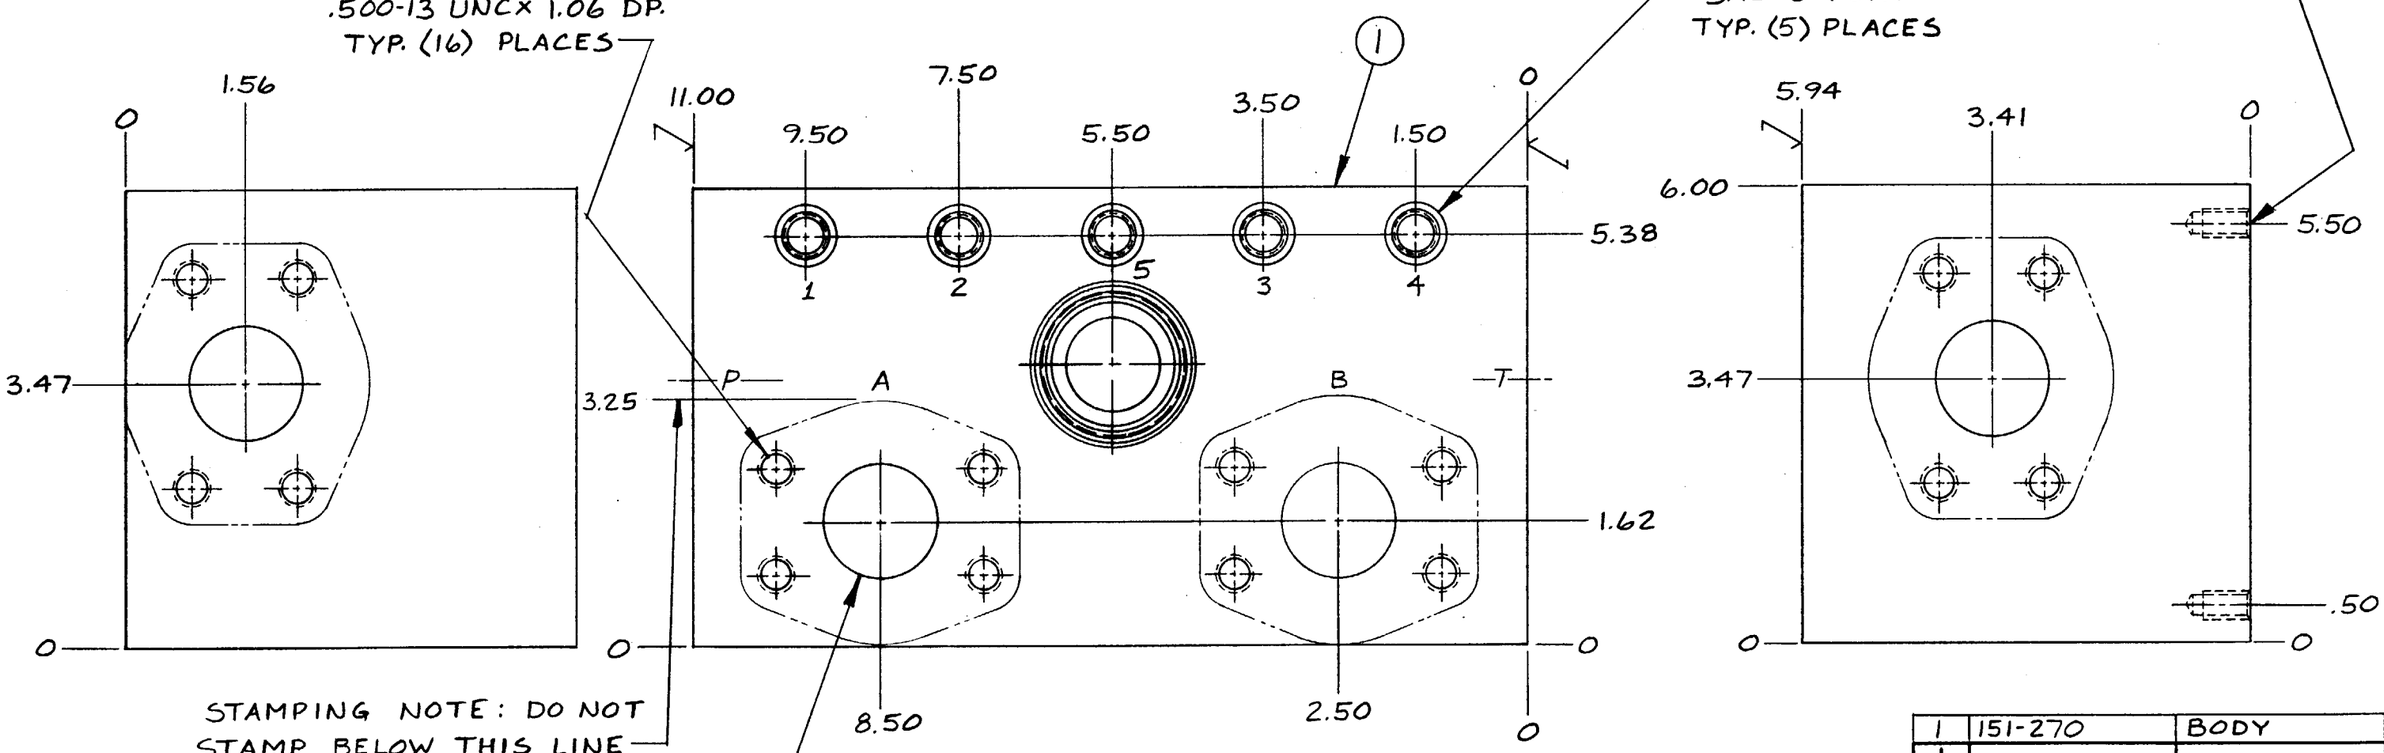

STAMPING NOTE: DO NOT
STAMP BELOW THIS LINE

1.50 DIA. SAE ST'D. PRESSURE
4-BOLT FLANGE PATTERN
TYP. (4) PLACES

ITEM	PART NO.	PART NAME	QTY
1	151-270	BODY	1

OUTLINE

LET.	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL.
.x = ± .030
.xx = ± .015
.xxx = ± .005
ANGLE TOL. ± 1°
FINISH 125√
REMOVE ALL BURRS

TITLE 5-CAV. 4-WAY DIRECTIONAL VALVE CIRCUIT T-19A CAV.

SCALE	REF.	MATERIAL
1/2		ALUMINUM

DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH
DAS	RLB		
DATE 7-16-86	DATE	DATE	

REVISION	PART NO.
	YQD

sun hydraulics CORPORATION
SARASOTA, FLORIDA
TELEPHONE 813/355-2983