

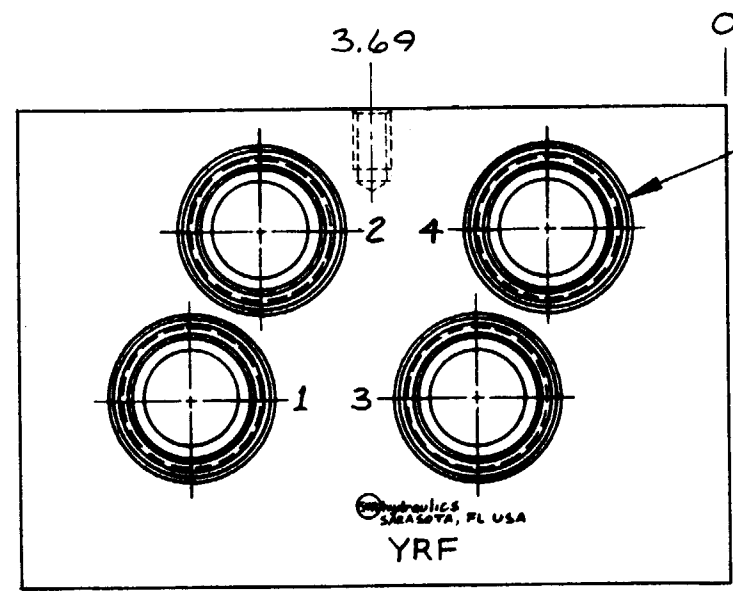



SYMBOL

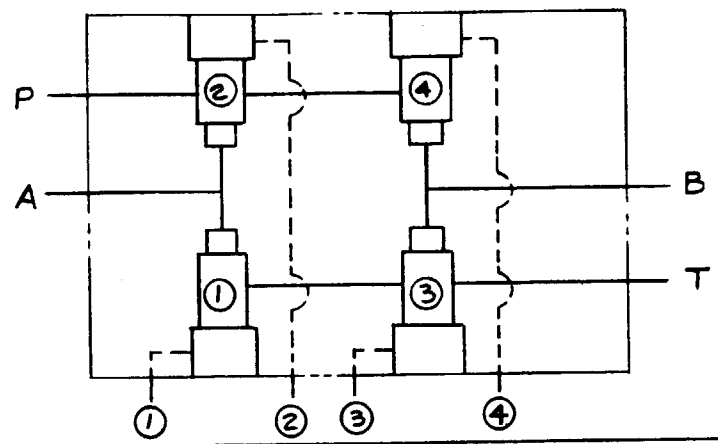


MOUNTING PROVISION:
.375-16 UNC x .62 DP.
TYP. (2) PLACES

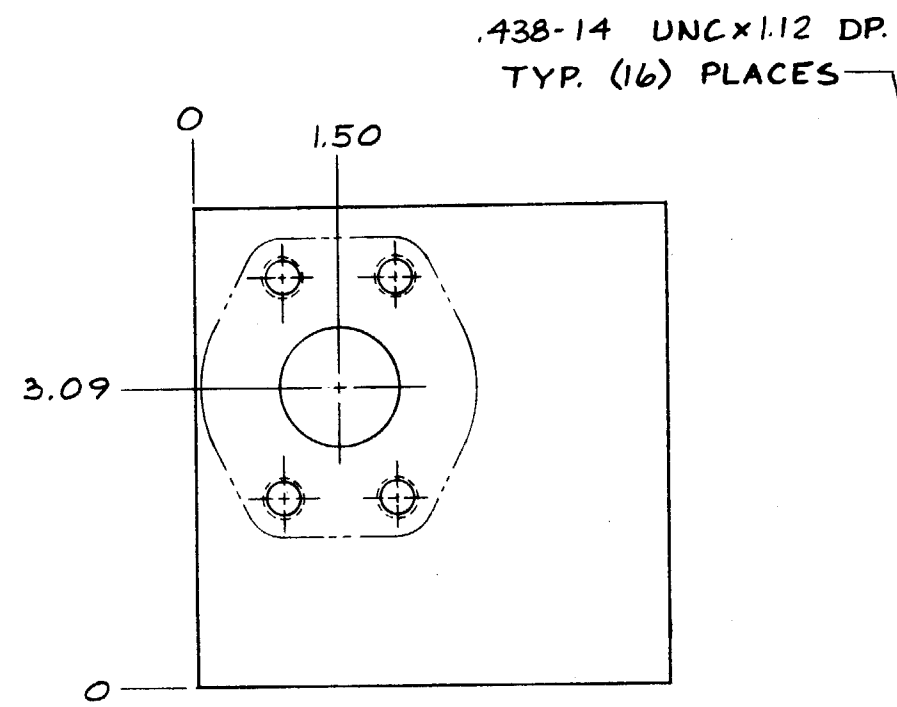

1.25 DIA. SAE ST'D. PRESSURE
4-BOLT FLANGE PATTERN
TYP. (4) PLACES

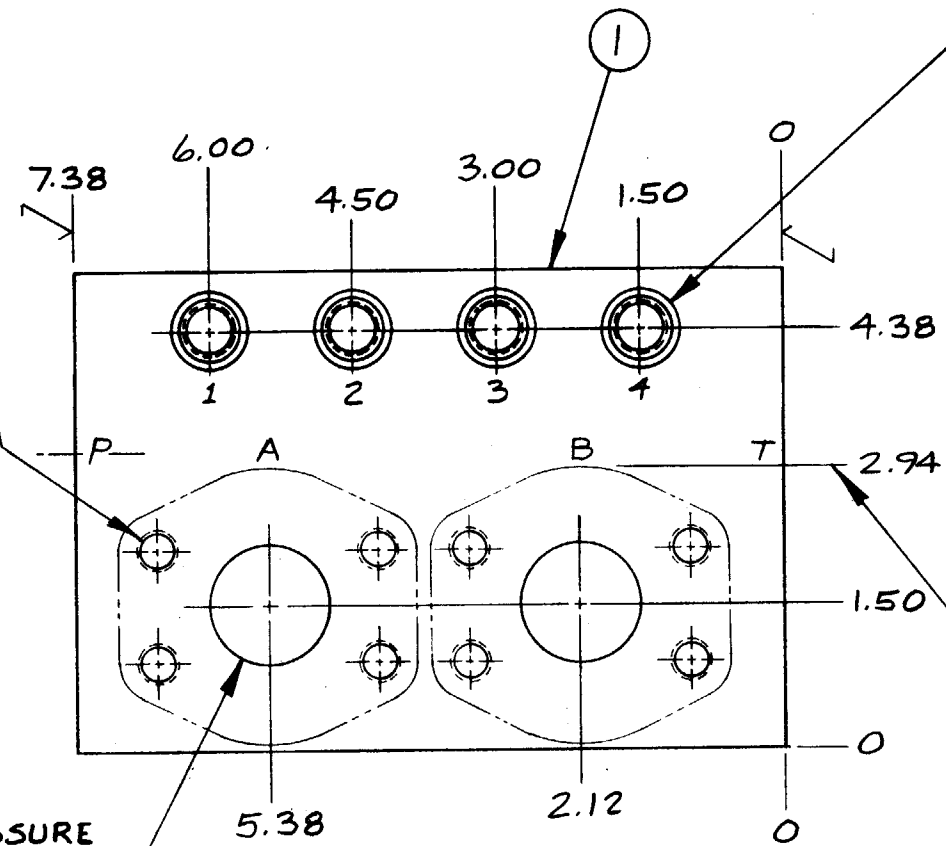

STAMPING NOTE: DO NOT
STAMP BELOW THIS LINE

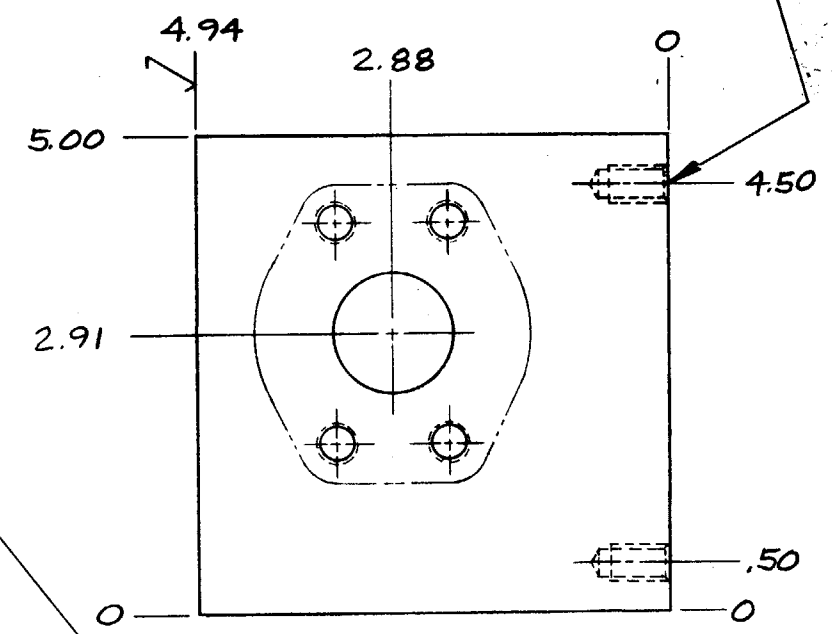

1	151-267	BODY	1
1	PART NO.	PART NAME	QTY

UNLESS OTHERWISE SPECIFIED					TITLE 4-CAV. 4-WAY DIRECTIONAL VALVE CIRCUIT T-17A CAV.		REVISION		PART NO. YRF			
DIMENSION TOL .X = ± .030 .XX = ± .015 .XXX = ± .005					SCALE 1/2		MATERIAL ALUMINUM		 SARASOTA, FLORIDA TELEPHONE 813/355-2983			
ANGLE TOL ± 1°					DRAWN DAS		CHECK RJB				HEAT TREAT & FINISH	
FINISH 125 V REMOVE ALL BURRS					DATE 4-28-86		DATE				DATE	
LET.	REVISION				DATE	DRN	CHK	REL				