

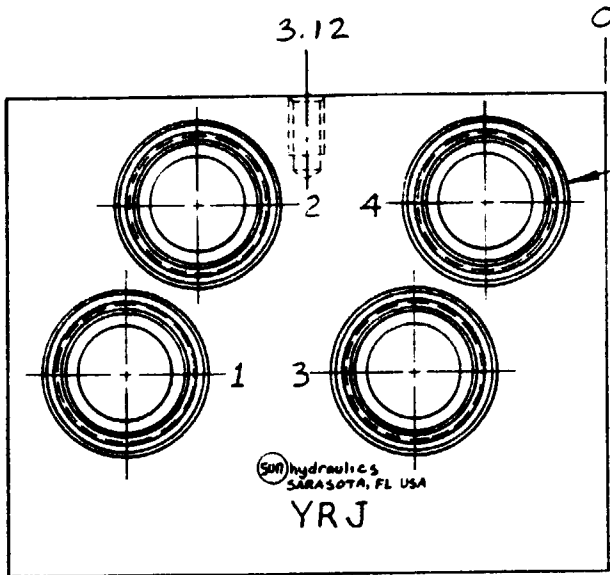
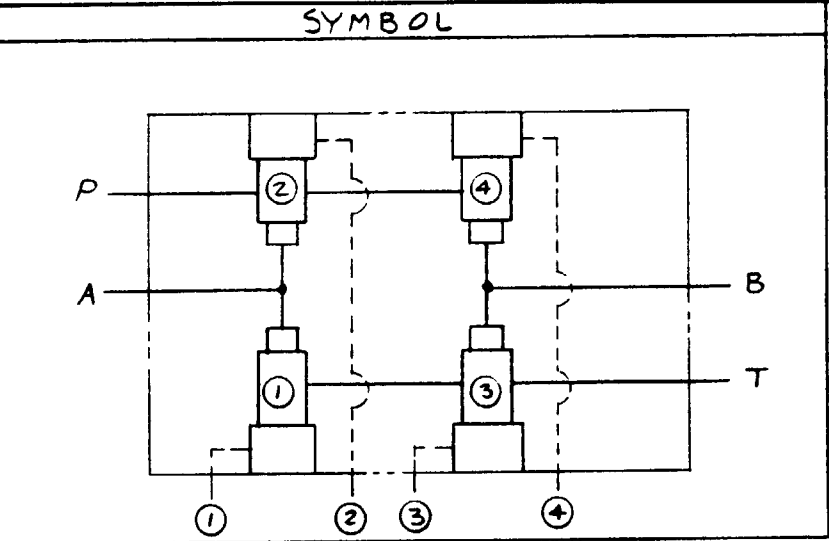


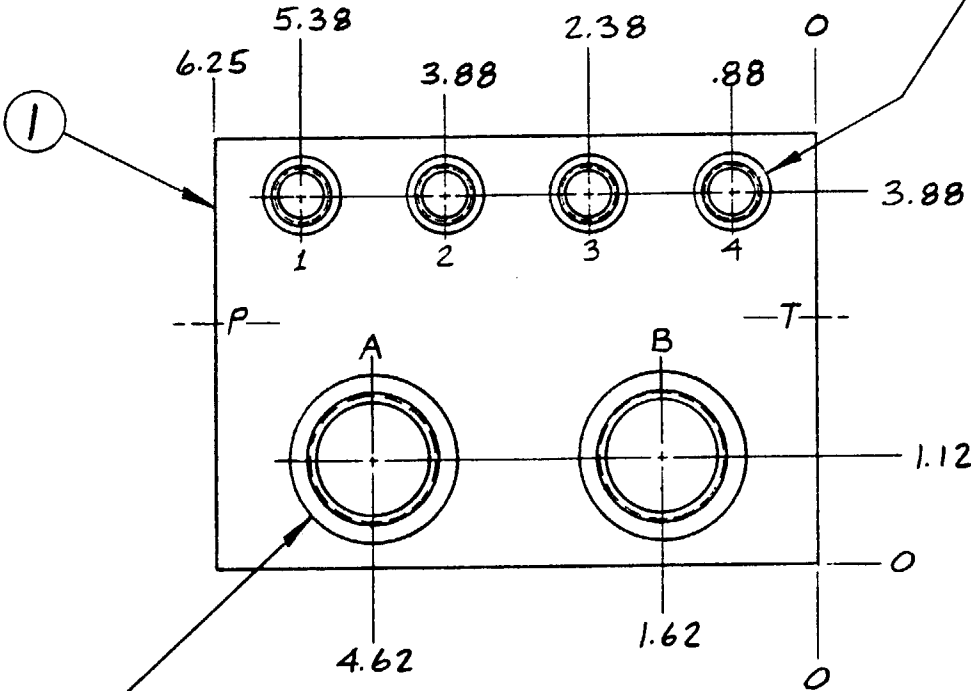


T-17A CAVITY
.906 L.S. DEPTH
TYP. (4) PLACES

MOUNTING PROVISION:
M10 x 1.5-6H x .62 DP.
TYP. (2) PLACES

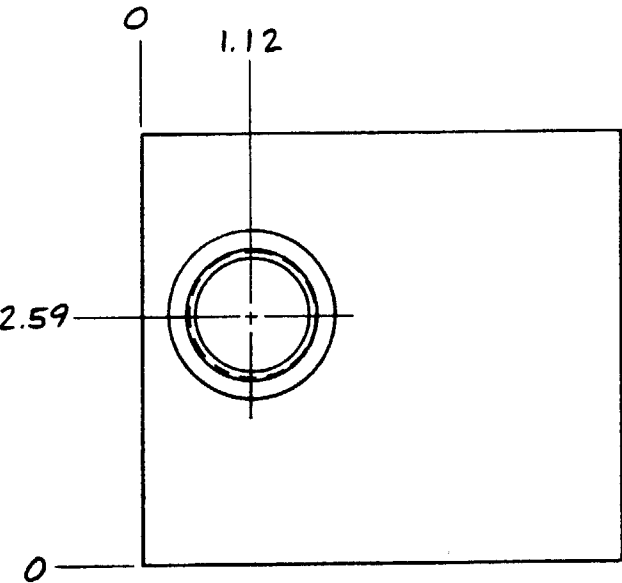

.250-19 BSPP PORT
TYP. (4) PLACES

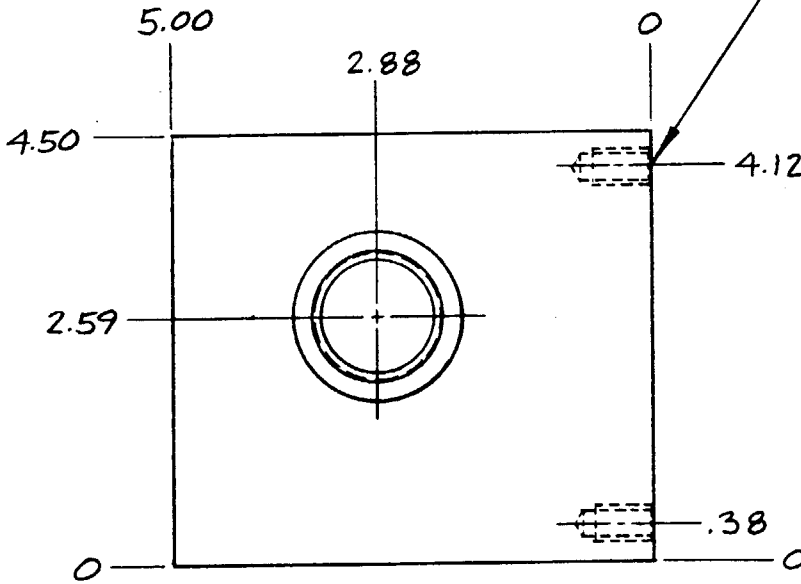

1.000-11 BSPP PORT
TYP. (4) PLACES

									UNLESS OTHERWISE SPECIFIED	TITLE 4-CAV. 4-WAY DIRECTIONAL VALVE CIRCUIT T-17A CAV.			REVISION	PART NO. YRJ
									DIMENSION TOL. .x = ± .030 .xx = ± .015 .xxx = ± .005	SCALE 1/2	REF.	MATERIAL ALUMINUM	 SARASOTA, FLORIDA TELEPHONE 813/355-2983	
									ANGLE TOL. ± 1° FINISH 125V REMOVE ALL BURRS	DRAWN DAS	CHECK RJB	RELEASE		HEAT TREAT & FINISH
										DATE 3-5-86	DATE	DATE		
LET.	REVISION				DATE	DRN	CHK	REL						