

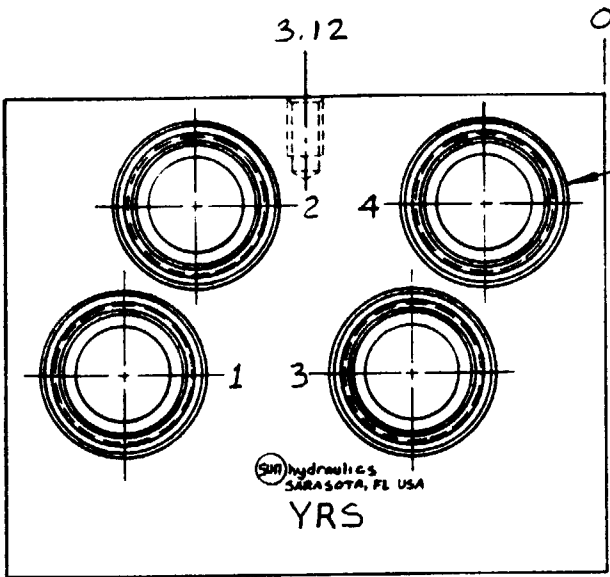
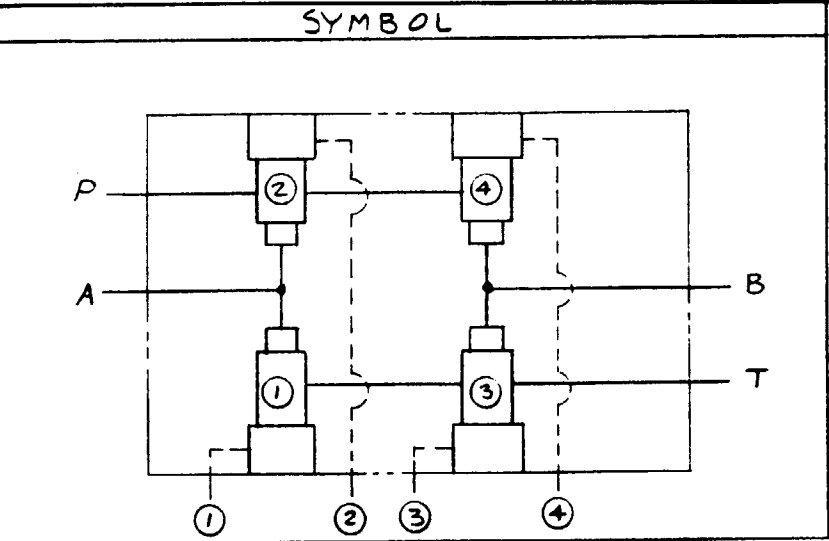


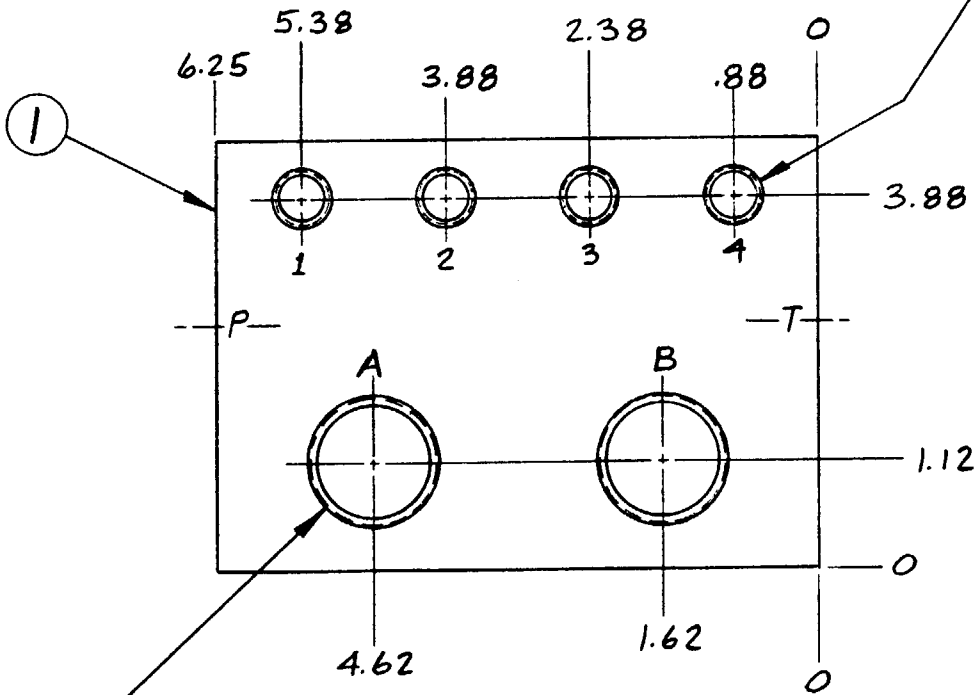


T-17A CAVITY
.906 L.S. DEPTH
TYP. (4) PLACES

MOUNTING PROVISION:
.375-16 UNC X .62 DP.
TYP. (2) PLACES

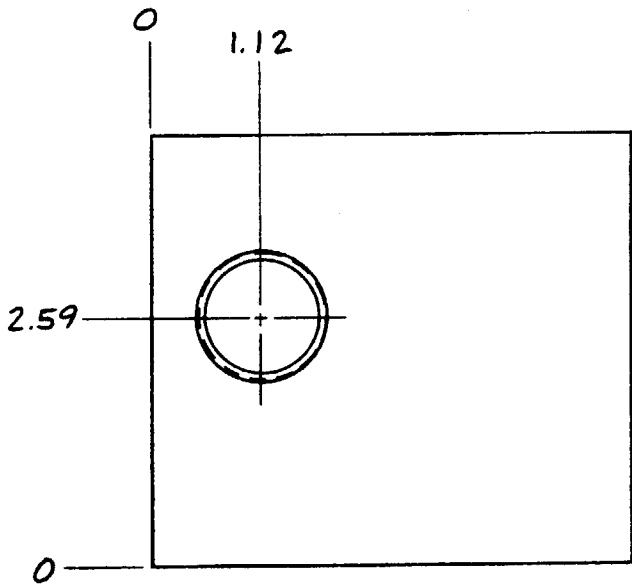

.250-18 NPTF PORT
TYP. (4) PLACES

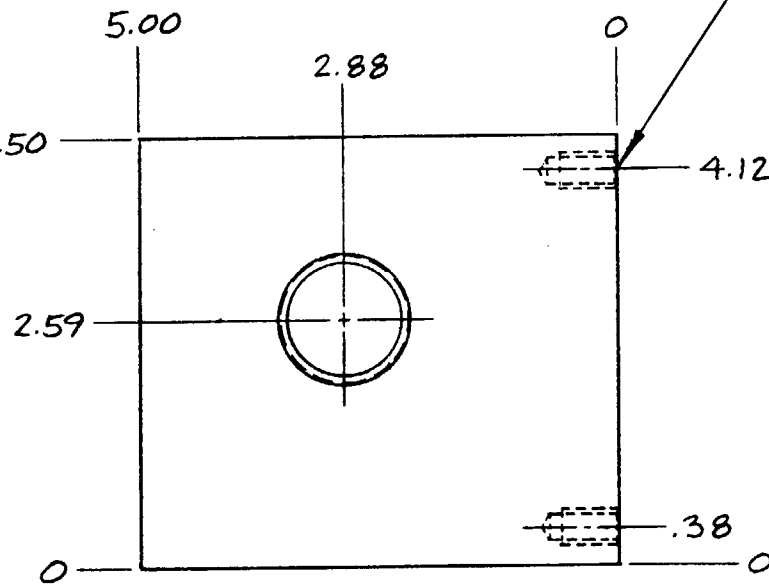

.750-14 NPTF PORT
TYP. (4) PLACES

1	151-263-001	BODY	1
ITEM	PART NO.	PART NAME	QTY

UNLESS OTHERWISE SPECIFIED					TITLE 4-CAV. 4-WAY DIRECTIONAL VALVE CIRCUIT T-17A CAV.			REVISION		PART NO. YRS		
DIMENSION TOL					SCALE 1/2	REF.	MATERIAL ALUMINUM		 SARASOTA, FLORIDA TELEPHONE 813-355-2983			
.X = ± .030					DRAWN DAS	CHECK R/B	RELEASE	HEAT TREAT & FINISH				
.XX = ± .015					DATE 3-5-86	DATE	DATE					
.XXX = ± .005												
ANGLE TOL ± 1°												
FINISH 125 V												
REMOVE ALL BURRS												
LET.	REVISION				DATE	DRN	CHK	REL				