
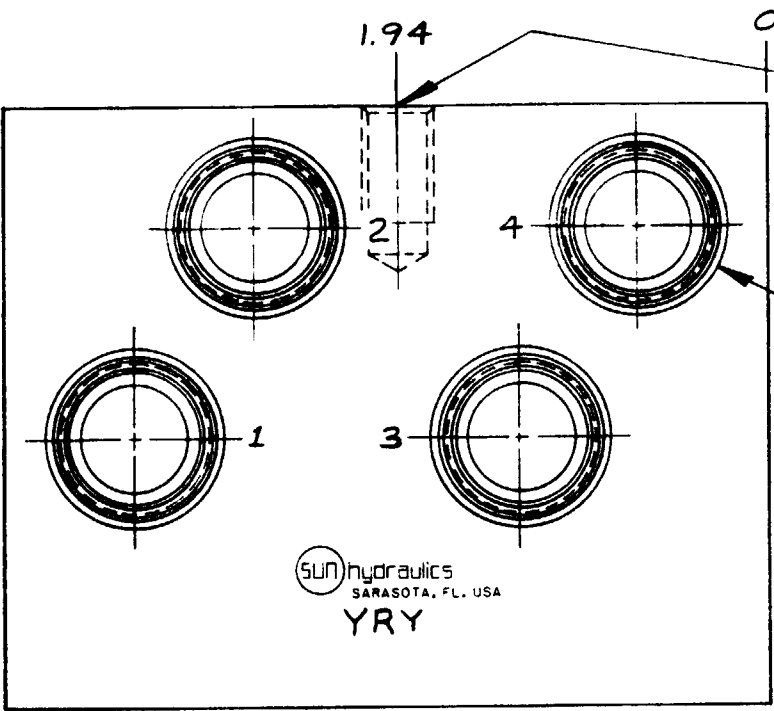





SYMBOL

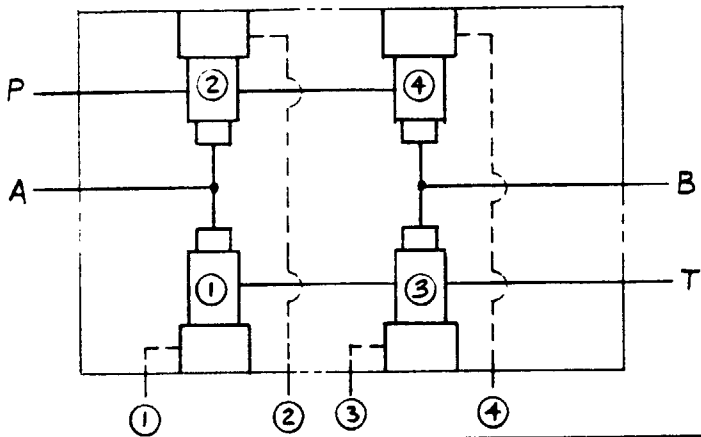

MOUNTING PROVISION:
.375-16 UNC x .62 DP.
TYP. (2) PLACES

T-IIA CAVITY
.688 L.S. DEPTH
TYP. (4) PLACES

.250-18 NPTF PORT
TYP. (4) PLACES

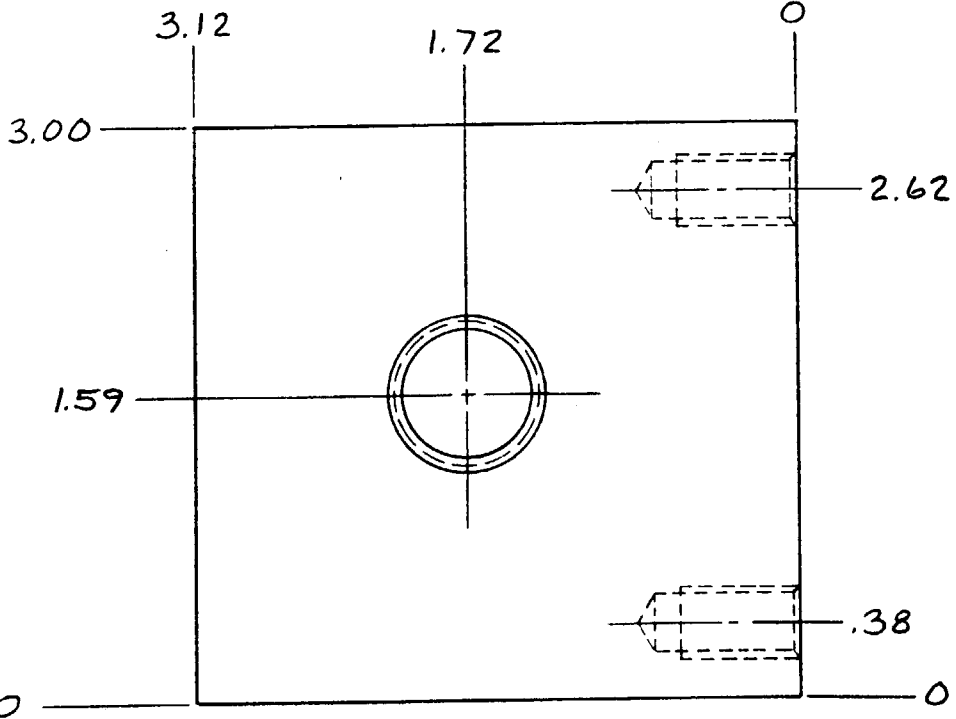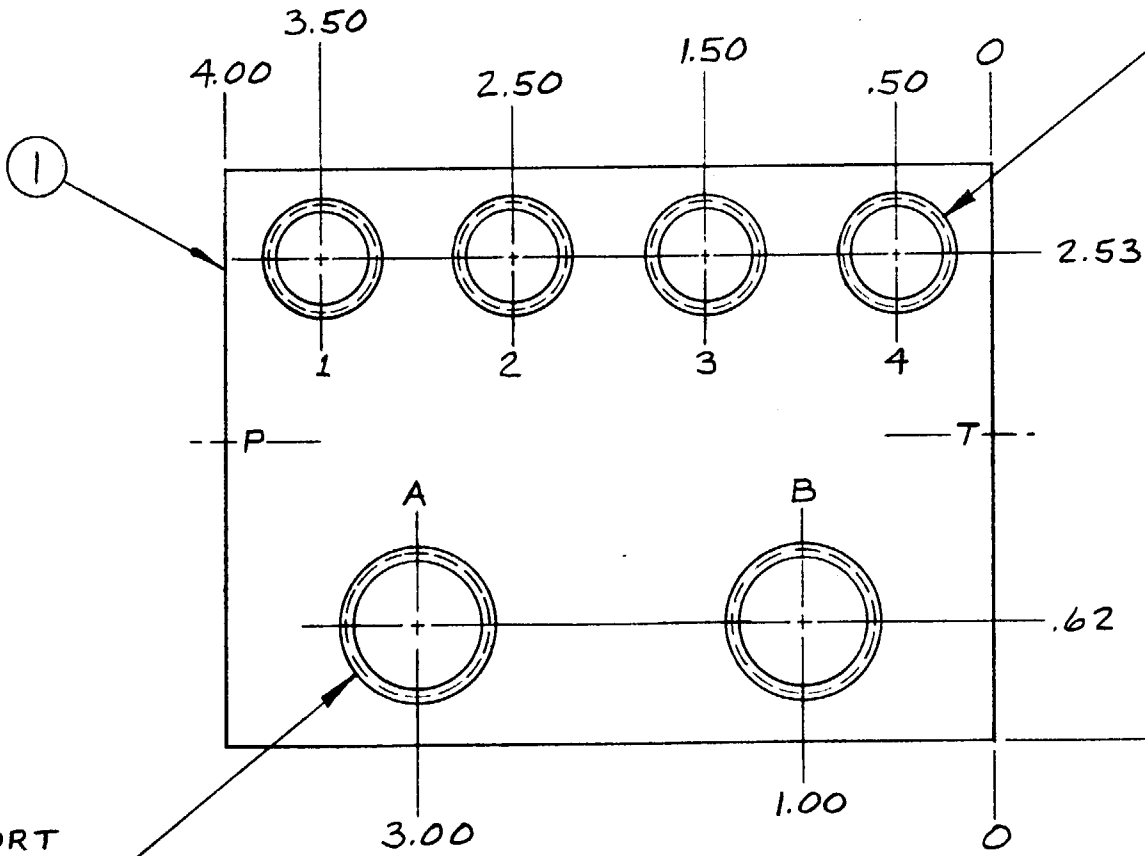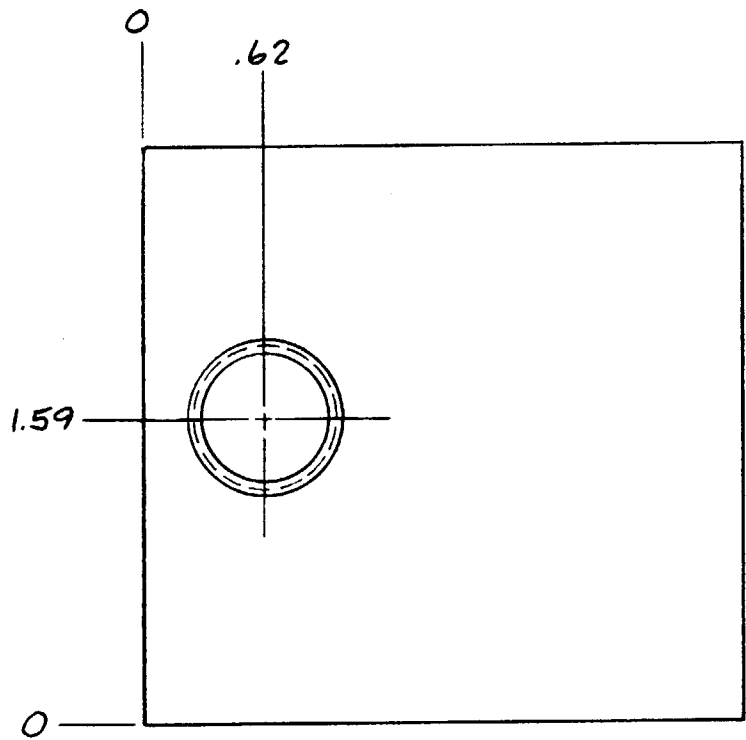

.375-18 NPTF PORT
TYP. (4) PLACES

ITEM	151-259-002	BODY	1
PART NO.	PART NAME		QTY

UNLESS OTHERWISE SPECIFIED				TITLE 4-CAV. 4-WAY DIRECTIONAL VALVE CIRCUIT T-IIA CAV.				REVISION		PART NO. YRY	
DIMENSION TOL				SCALE 1:1				REF.		MATERIAL ALUMINUM	
.X = ± .030				DRAWN DAS				CHECK RJB		HEAT TREAT & FINISH	
.XX = ± .015				DATE 3-4-86				RELEASE		DATE	
.XXX = ± .005				FINISH 125 V				REMOVE ALL BURRS		DATE	
LET.				REVISION				DATE			
DATE				DRN				CHK			
REL				DATE				DATE			



SARASOTA, FLORIDA
TELEPHONE 813/355-2983