


3RD ANGLE
PROJECTION




REVISION
A

PART NO.


YTQ

NOTES :

1) ALUMINUM BODY : 3000 PSI
MAXIMUM CONTINUOUS
WORKING PRESSURE.

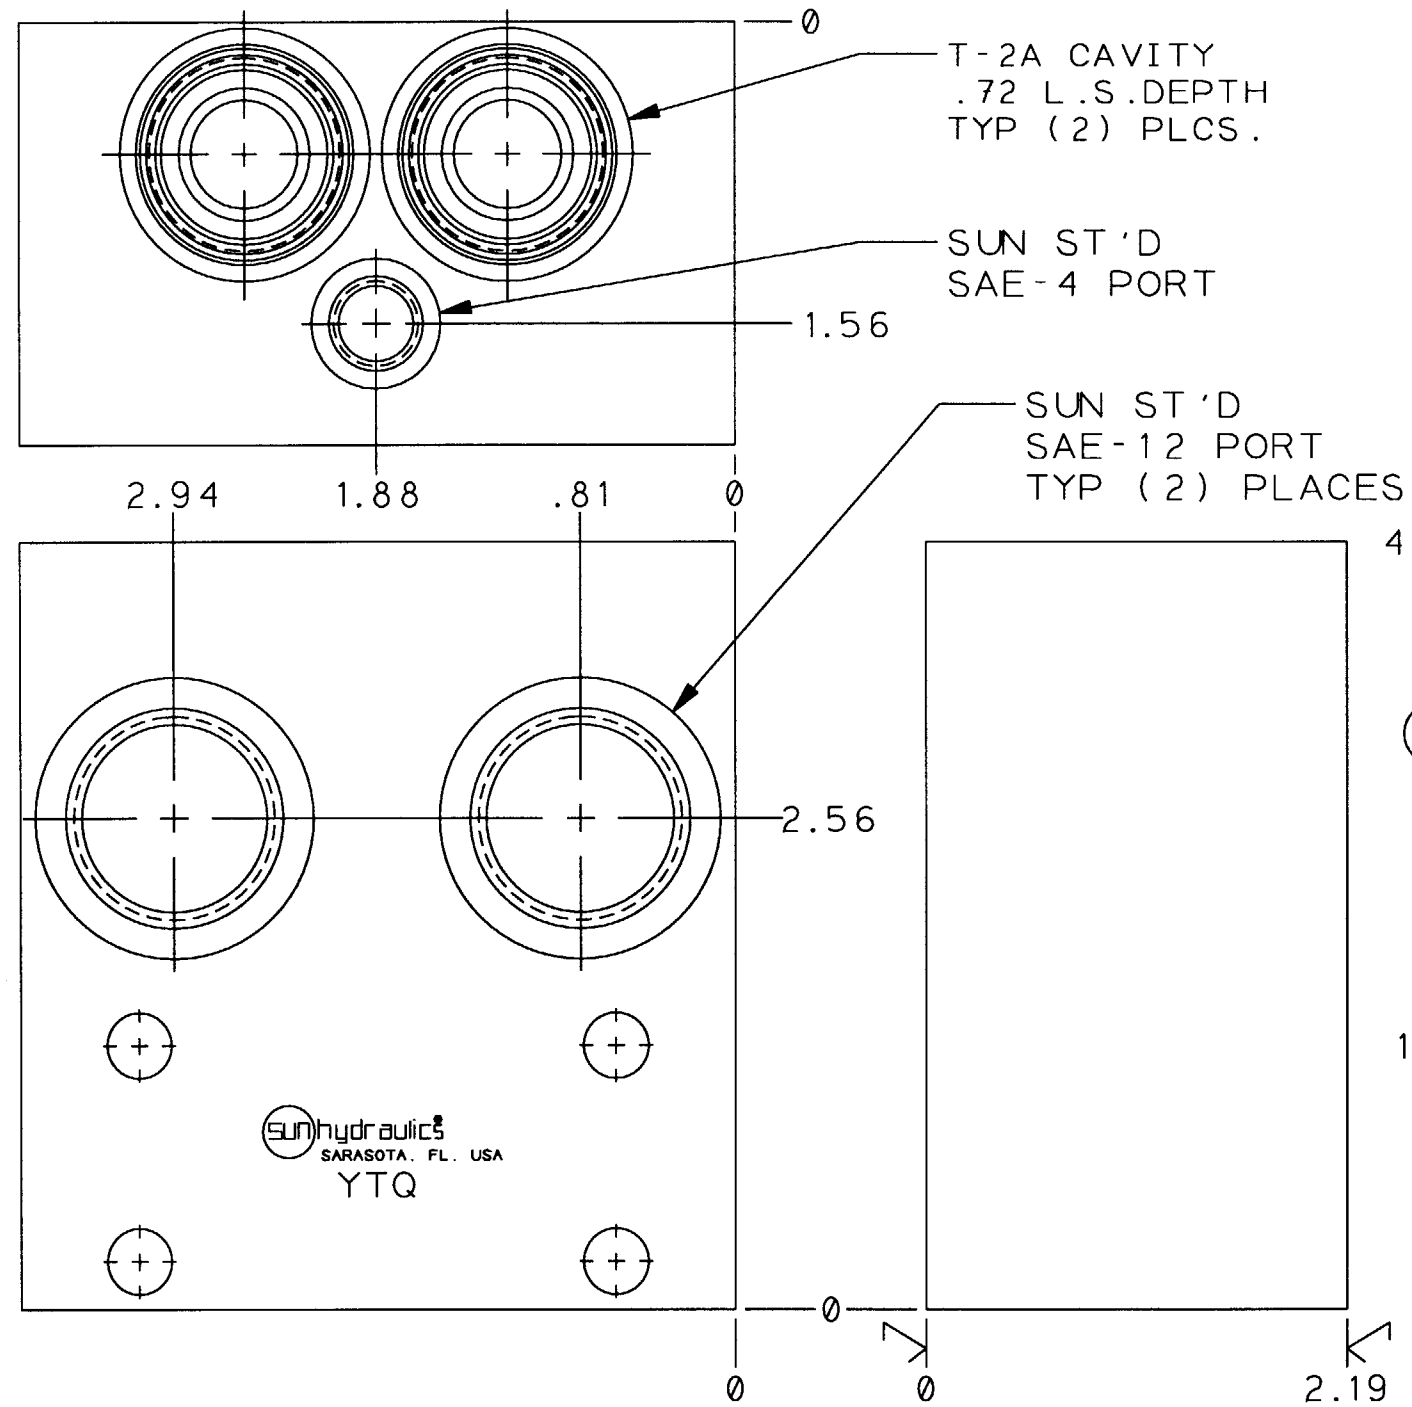


VC-3 APPLIED TO THREADS
(APPROX. 24 HRS. BEFORE
INSTALLATION)

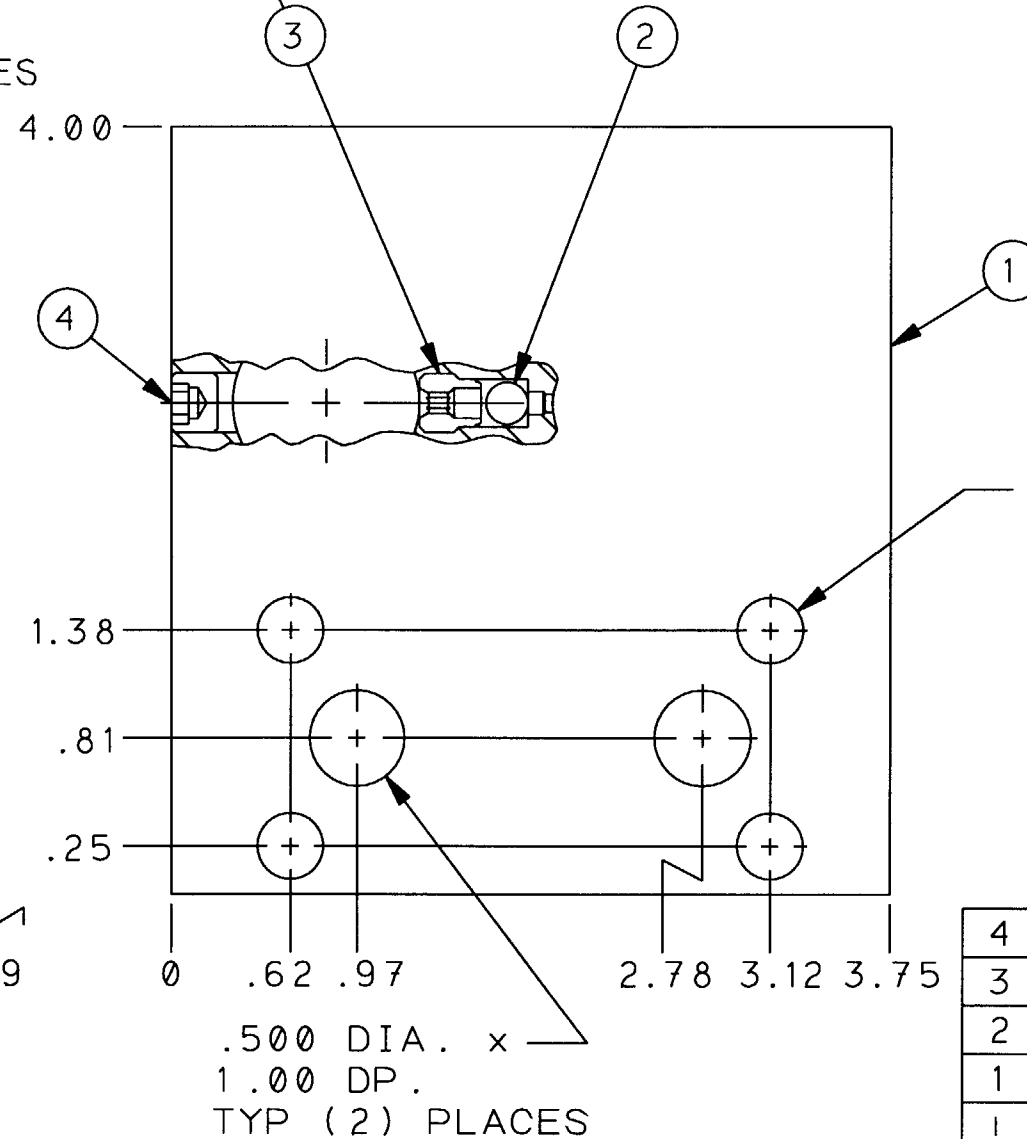

MOUNTING HOLES
.34 DIA. THRU
TYP (4) PLACES

4	340-002	PIPE PLUG	1
3	260-010	SEAT	1
2	800-001-070	BALL	1
1	150-950	BODY	1
ITEM	PART NO.	PART NAME	QTY

SYMBOL

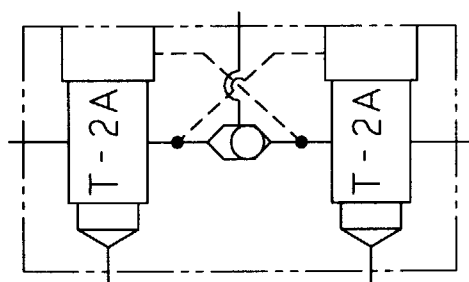

OUTLINE & ASSEMBLY

UNLESS OTHERWISE SPECIFIED					TITLE BODY-DUAL C-BALANCE SHUTTLE VALVE FOR CHAR-LYNN H & S, T-2A CAVITIES			REVISION	PART NO.
DIMENSION TOL					SCALE	REF.	MATERIAL	A	YTQ
.x = ±.030					1/1		ALUMINUM		
.xx = ±.015					DRAWN	CHECK	RELEASE		
.xxx = ±.005					HHP	JDA	402		
ANGLE TOL ± 1/2					DATE	DATE	DATE		
FINISH 80					01 JUL 83	06 JUL 83	06 JUL 83		
REMOVE ALL BURRS									
A	REDRAWN ON CADD, ADDED NOTE.				29 JUL 93	BRS	RJB	1272	
LET	REVISION				DATE	DRN	CHK	REL	

