



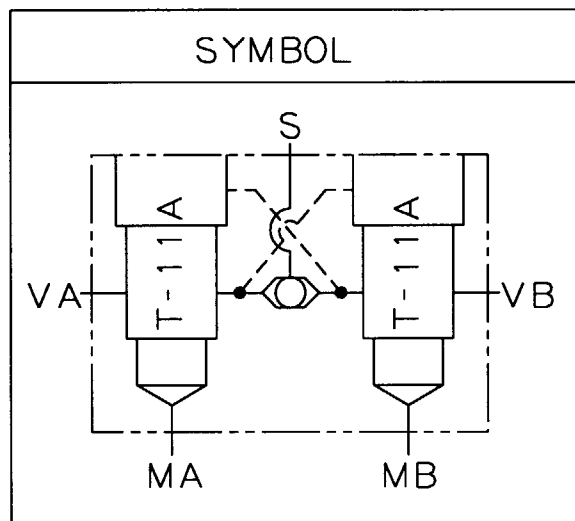

T-11A CAVITY
.688 L.S. DEPTH
TYP (2) PLACES


INSTALL PER S-48

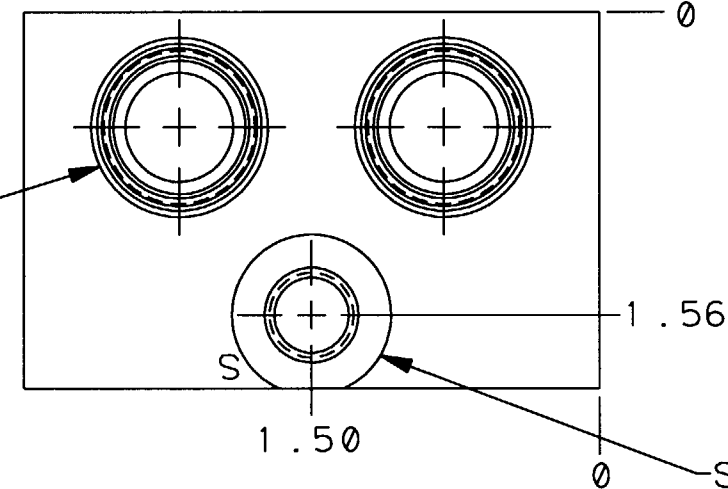

REVISION C PART NO. YVN



NOTES:

1) ALUMINUM BODIES: 3000 PSI MAX.
CONTINUOUS SERVICE PRESSURE.

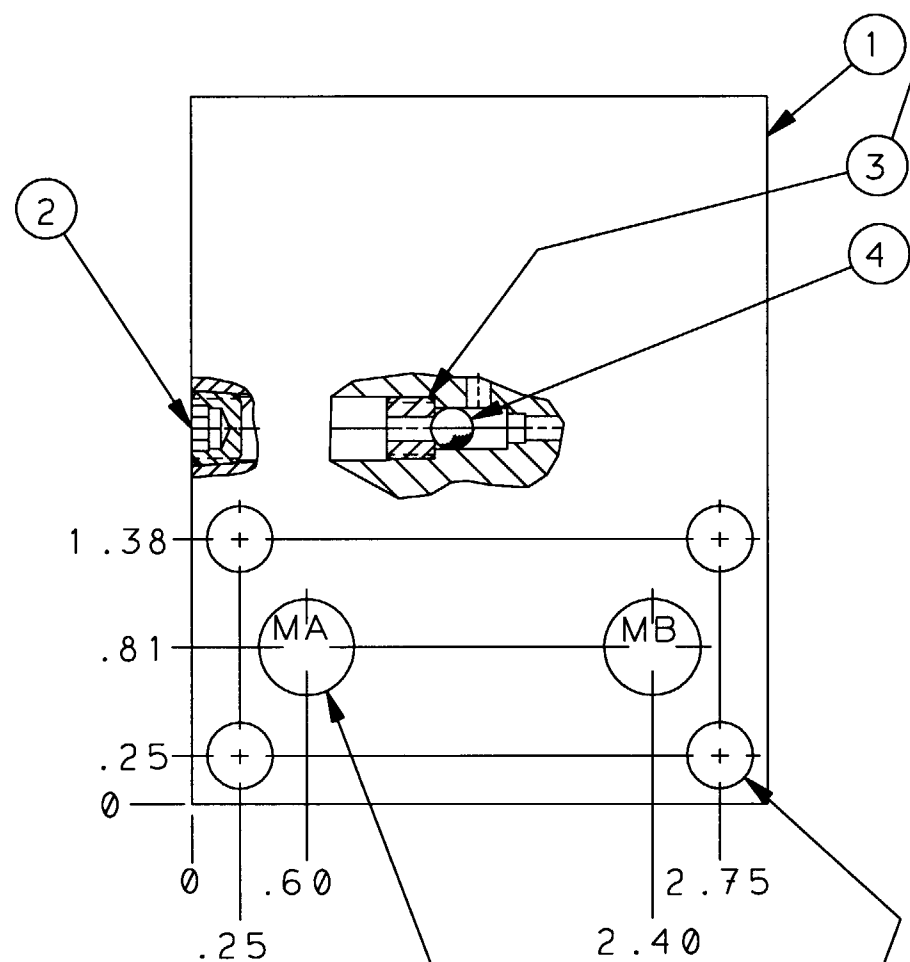

.50 DIA
TYP (2) PLCS

.34 DIA THRU MTG HOLE
TYP (4) PLACES

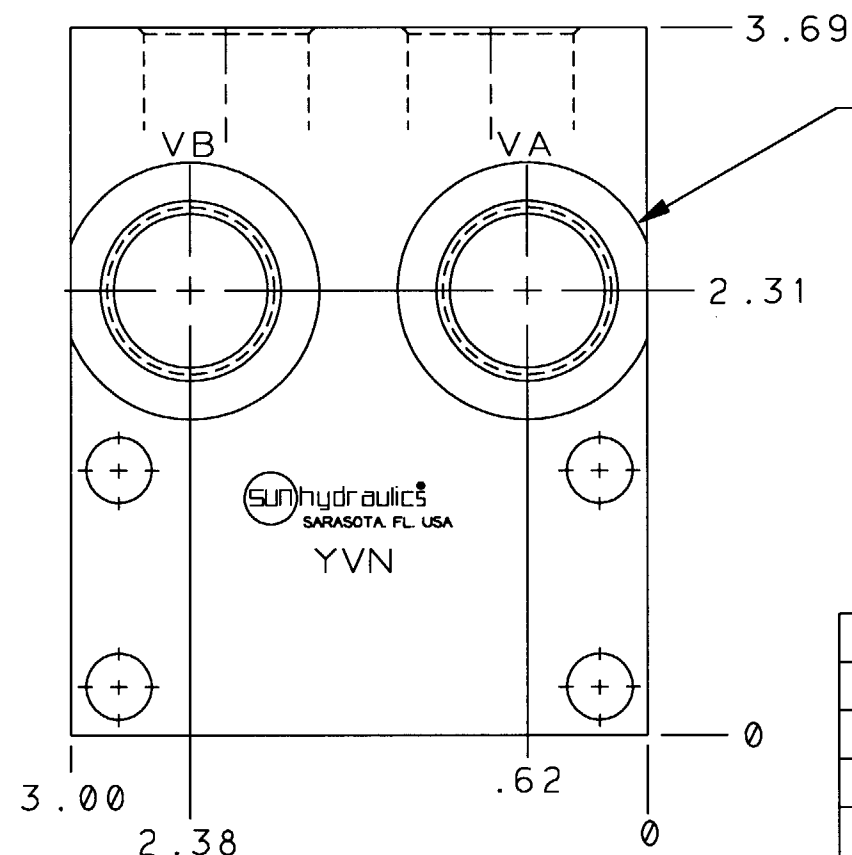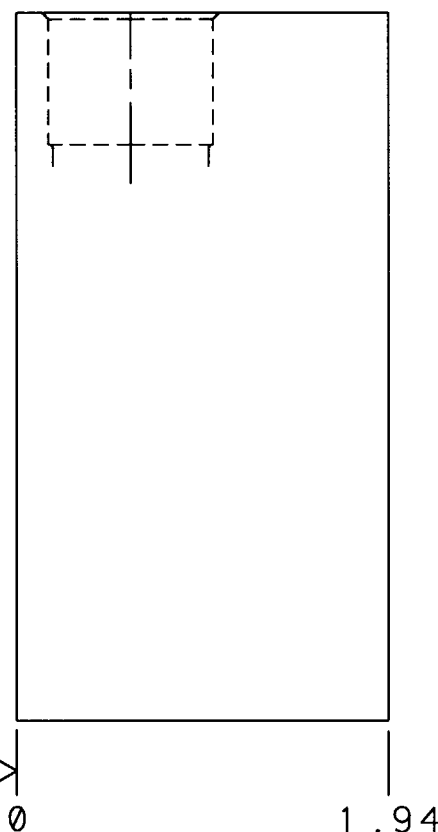

4	800-001-070	BALL	1
3	260-010	SEAT	1
2	340-002	PIPE PLUG	1
1	150-790-002	BODY	1
ITEM	PART NO.	PART NAME	QTY

LET	REVISION	DATE	DRN	CHK	REL
C	STD SAE PORTS WERE SUN STD SAE PORTS	17 JUL 96	MAE	DAS	7393
B	REDRAWN IN CADD	09 AUG 93	DAS		
A	REVISED & REDRAWN	11-7-84	KWL	JDA	657

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x = ±.030
.xx = ±.015
.xxx = ±.005
ANGLE TOL ± 1/2°
FINISH 80V
REMOVE ALL BURRS

OUTLINE & ASSEMBLY

TITLE BODY-CHARLYN H & S MOUNTED DUAL
CROSS-PILOTED T-11A CAVITIES
W/SHUTTLE SUN STD SAE-10 PORTS

SCALE REF.
1:1
DRAWN KWL
CHECK JPG
RELEASE 210
DATE 10-1-84
DATE 11-7-84
DATE 4-15-82

MATERIAL
ALUMINUM
HEAT TREAT & FINISH

SUN hydraulics
CORPORATION
1500 WEST UNIVERSITY PKWY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (941) 362-1200