



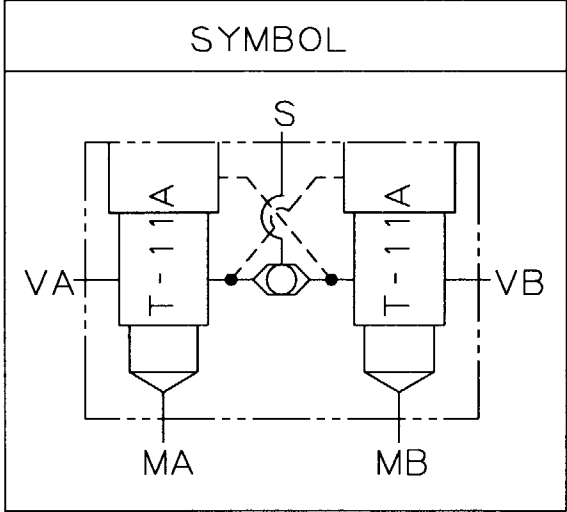

T-11A CAVITY
.688 L.S. DEPTH
TYP (2) PLACES

INSTALL PER S-48

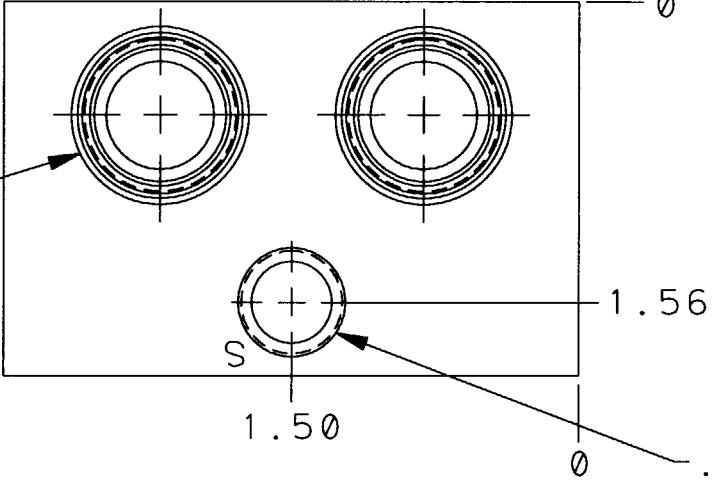


REVISION	PART NO.
B	YVO

NOTES:



1) ALUMINUM BODIES: 3000 PSI MAX.
CONTINUOUS SERVICE PRESSURE.

.250-18 NPTF PORT

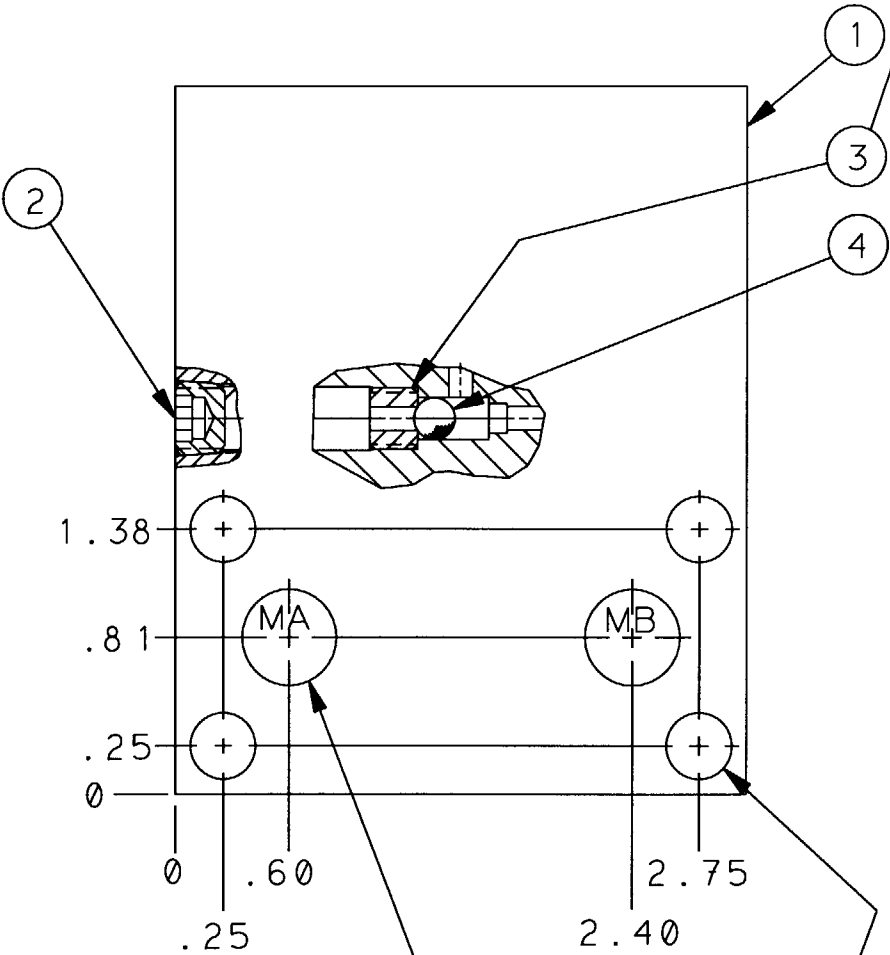

.50 DIA
TYP (2) PLCS

.34 DIA THRU MTG HOLE
TYP (4) PLACES

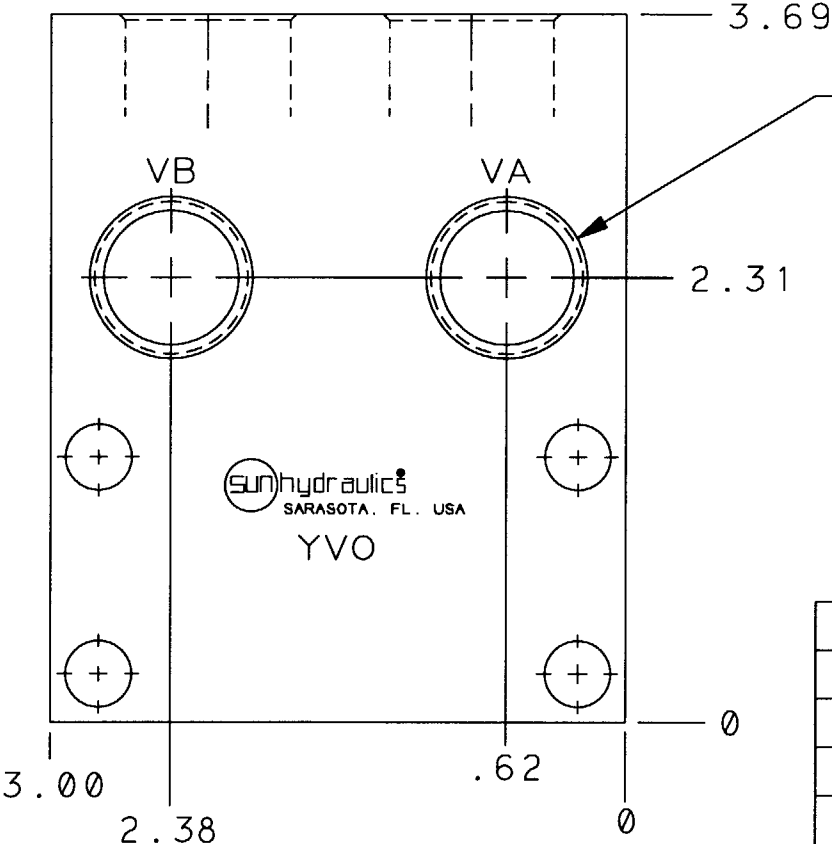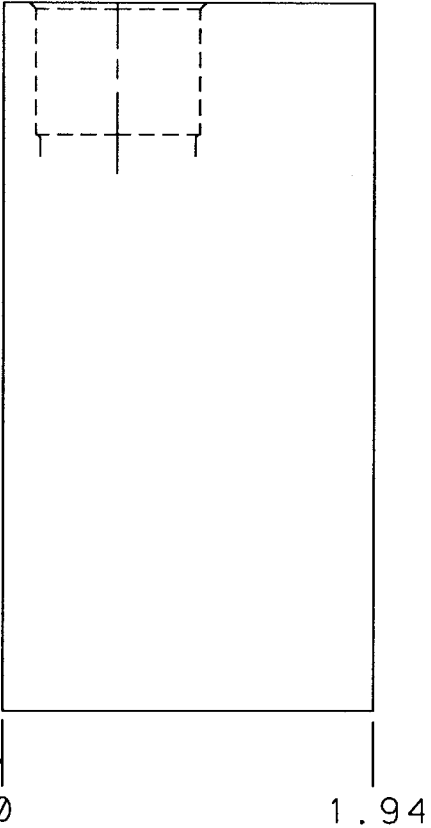

.500-14 NPTF PORT
TYP (2) PLACES

ITEM	PART NO.	PART NAME	QTY
4	800-001-070	BALL	1
3	260-010	SEAT	1
2	340-002	PIPE PLUG	1
1	150-790-001	BODY	1

OUTLINE & ASSEMBLY

REV	DESCRIPTION	DATE	DRN	CHK	REL
B	REDRAWN IN CADD	09 AUG 93	DAS		4905
A	REVISED & REDRAWN	11-7-84	KWL	JDA	657
LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.X ±.030
.XX ±.015
.XXX ±.005
ANGLE TOL ±½
FINISH 80
REMOVE ALL BURRS

TITLE BODY-CHARLYN H & S MOUNTED DUAL CROSS-PILOTED T-11A CAVITIES w/SHUTTLE 1/2-14 NPTF PORTS			REVISION B	PART NO. YVO
SCALE 1:1	REF.	MATERIAL ALUMINUM		
DRAWN KWL	CHECK JPG	RELEASE 210	HEAT TREAT & FINISH	
DATE 10-1-84	DATE 11-7-84	DATE 4-15-82		

SUN hydraulics
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983