




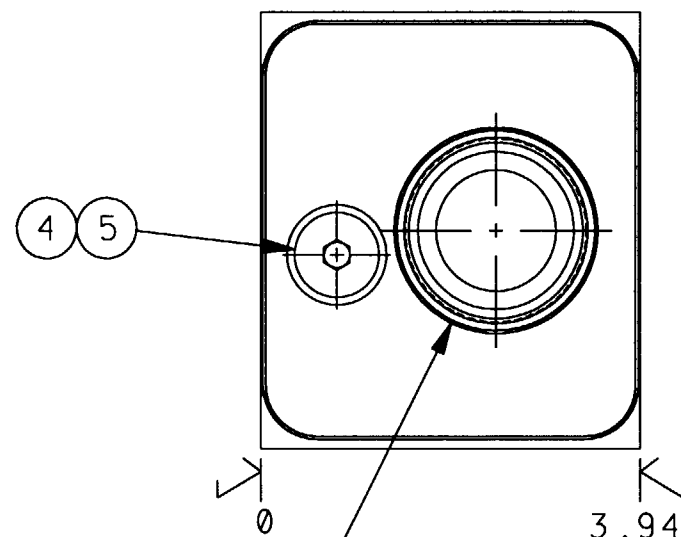

T-19A CAVITY
1.156 L.S. DEPTH

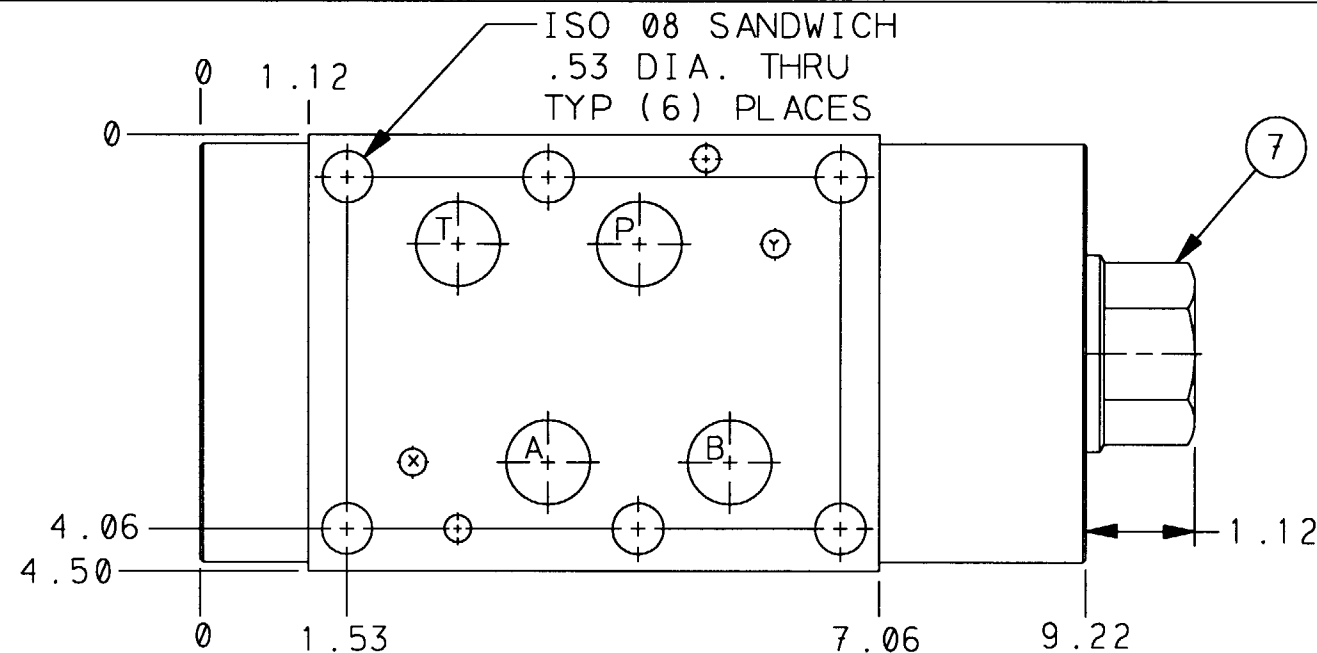


ISO Ø8 SANDWICH
.53 DIA. THRU
TYP (6) PLACES

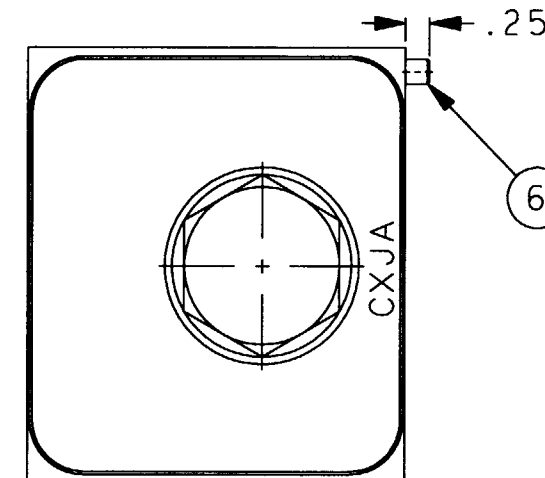


NOTES:

- 1) SEALS: BUNA-N
- 2) CXJA XCN CARTRIDGE:
CRACKING PRESSURE: 30 PSI ± 3
CHECK SEAT: STEEL

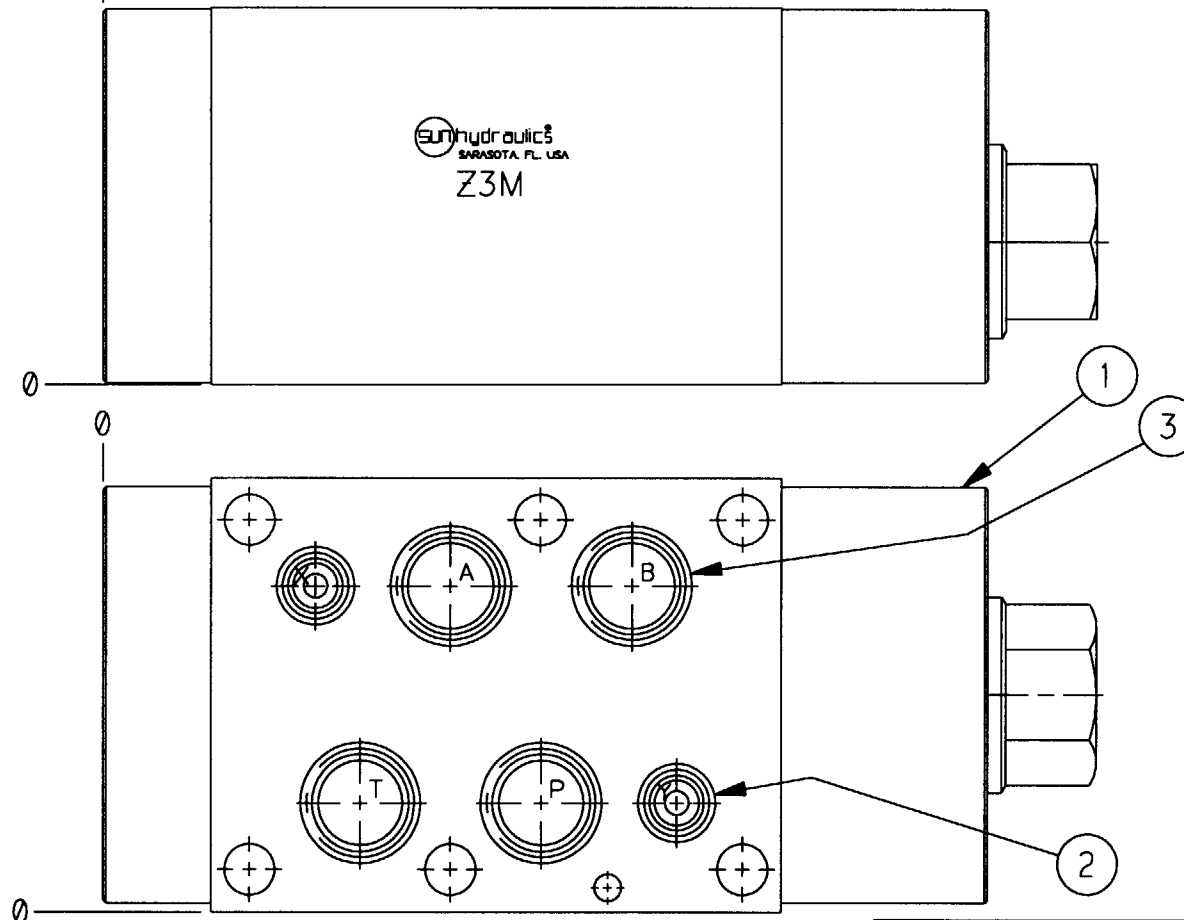

7	CXJA XCN	CHECK VALVE	1
6	811-001-002	ROLL PIN	1
5	330-006-008	PLUG	1
4	500-002-908	"O"RING	1
3	500-001-121	"O"RING	4
2	500-001-114	"O"RING	2
1	153-846	BODY	1
ITEM	PART NO.	PART NAME	QTY

SYMBOL

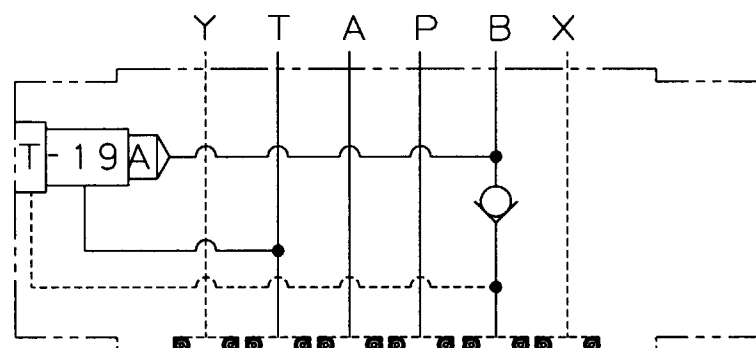

OUTLINE & ASSEMBLY

UNLESS OTHERWISE SPECIFIED					TITLE ISO Ø8 SANDWICH-PRIORITY FLOW CONTROL ON "B" w/ REVERSE FREE-FLOW CHECK		REVISION	PART NO.
DIMENSION TOL					SCALE REF.	MATERIAL	Z3M	
.x = ±.030					1/2	ALUM. & NOTED		
.xx = ±.015					DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH
.xxx = ±.005					DAS	DAS	7111	
ANGLE TOL ± 1/2					DATE	DATE	DATE	
FINISH 80✓					11MAR96	11MAR96	13MAR96	
REMOVE ALL BURRS								
LET	REVISION	DATE	DRN	CHK	REL			

SUN hydraulics[®]
CORPORATION
1500 WEST UNIVERSITY PKWY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (941) 362-1200