

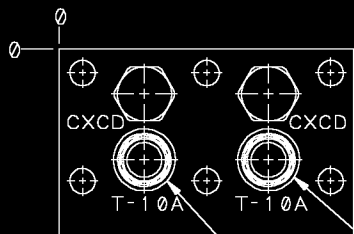
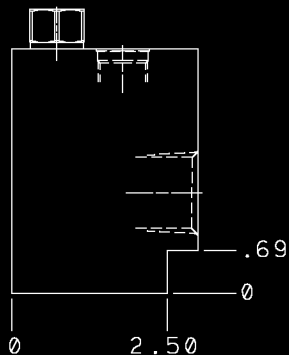



SYMBOL

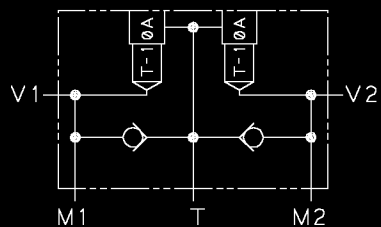


T-10A CAVITY
.031 L.S. DEPTH
TYP. (2) PLACES

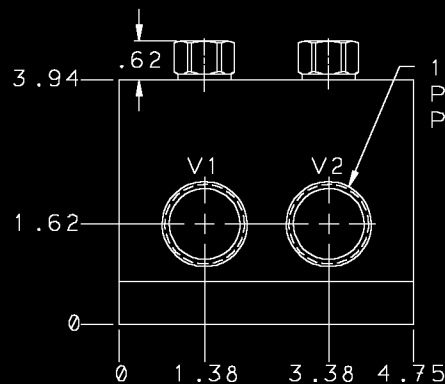

1.000-11.5 NPTF
PORTS TYP. (2)
PLACES

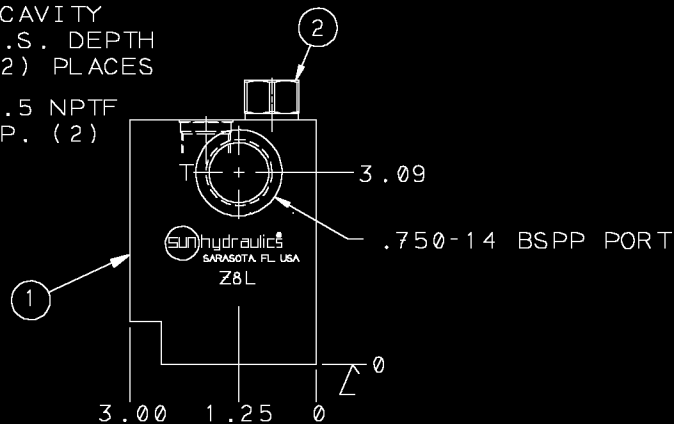

NOTE:
1) SEALS BUNA-N
2) CXCD XAN CARTRIDGE:
NON-ADJUSTABLE, 30 PSI
CRACKING PRESSURE $\pm$ 3PSI

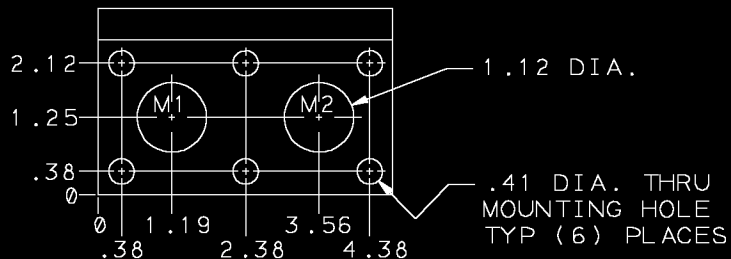

.41 DIA. THRU
MOUNTING HOLE
TYP (6) PLACES

OUTLINE & ASSEMBLY

2	CXCD XAN	SIDE TO NOSE CHECK VALVE	2
1	151-809-002	BODY	1
I T E M	PART NO.	PART NAME	Q T Y

										TITLE DIRECT MOUNTED CROSS PORT RELIEF MANIFOLD			REVISION A	PART NO. Z8L	
								DIMENSION TOL XX = +/- .015 XXX = +/- .005 MACHINING STANDARD S-100		SCALE/REF 1:2 YRDU LAN BE		MATERIAL ALUMINUM			
								ANGLE TOL +/- 1 FINISH #4V		DRAWN MAGE		CHECK	RELEASE 8077	HEAT TREAT & FINISH	
A		ITEM #2 WAS CXCD XCN				15SEP97		MAE	0140	DATE 29JUL97		DATE 29JUL97			
LTR		REVISION				DATE		DRN	CHK	REL					