



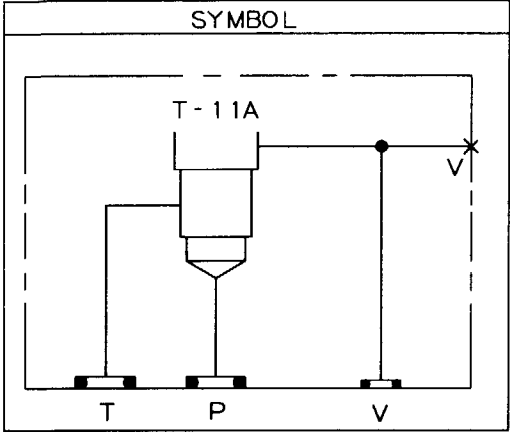





.50 RADIUS
TYP

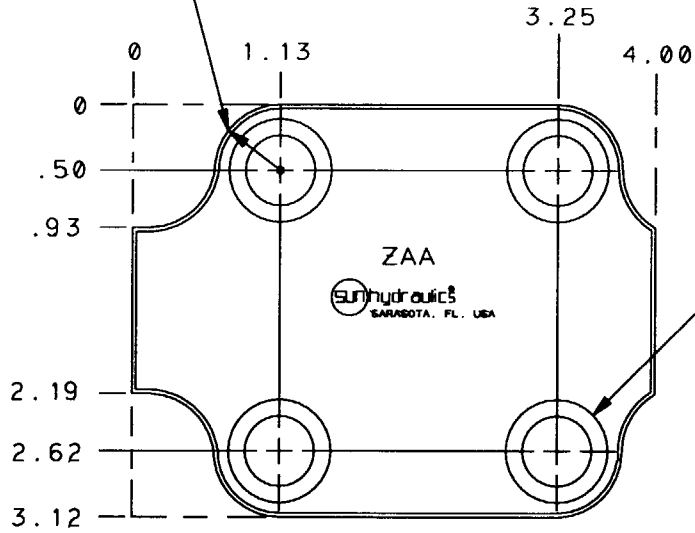

.53 DIA THRU
.78 DIA C'BORE X .50 DP
MOUNTING HOLES
TYP (4) PLCS

NOTES:

- 1) SEALS: BUNA N
- 2) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE

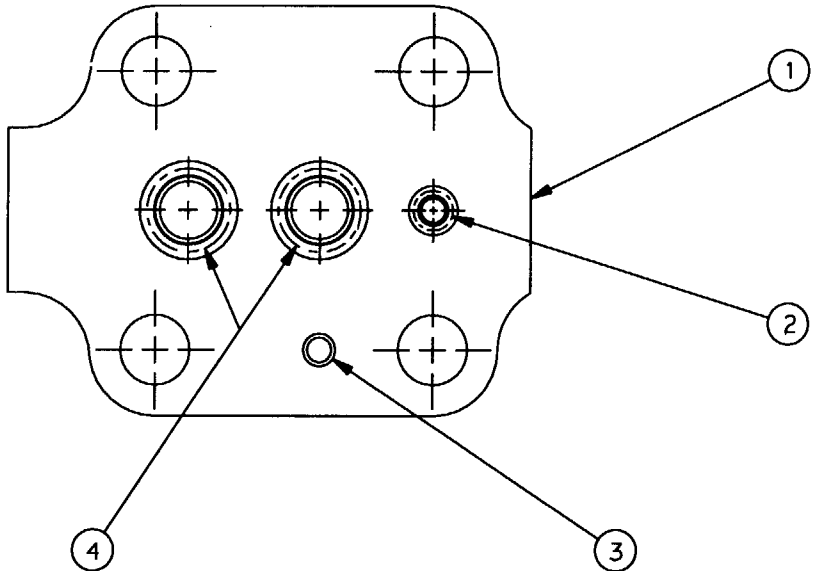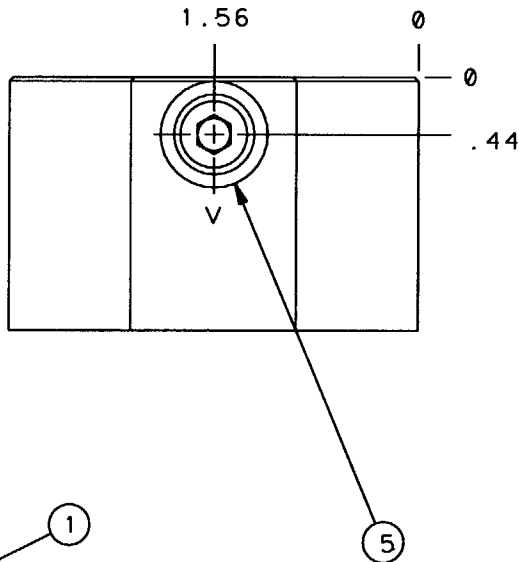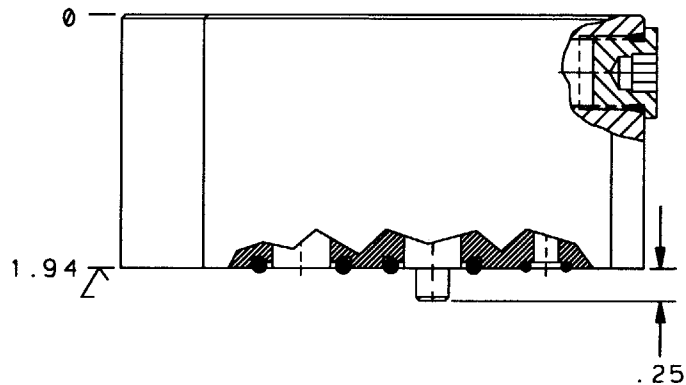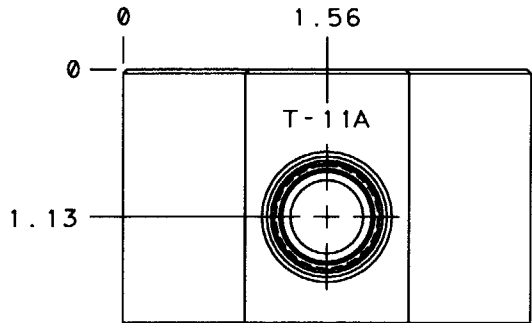

7	500-002-906	'O' RING	1
6	330-006-006	SAE-6 PLUG	1
4	500-001-113	'O' RING	2
3	811-001-002	LOCATING PIN	1
2	500-001-010	'O'-RING	1
1	153-112	BODY	1
ITEM	PART NO.	PART NAME	QTY


LET	REVISION	DATE	DRN	CHK	REL
-----	----------	------	-----	-----	-----

UNLESS
OTHERWISE
SPECIFIED

DIMENSION TOL
.x ±.030
.xx ±.015
.xxx ±.005

ANGLE TOL ±½
FINISH 80✓
REMOVE ALL
BURRS

OUTLINE AND ASSEMBLY

TITLE T-11A CAVITY SUB-PLATE MOUNTED BODY CG-03 INTERFACE			
SCALE 1:1	REF.		MATERIAL ALUMINUM
DRAWN gbb	CHECK DAS	RELEASE 59 49	HEAT TREAT & FINISH 
DATE 22 AUG 94	DATE	DATE 24 AUG 94	

