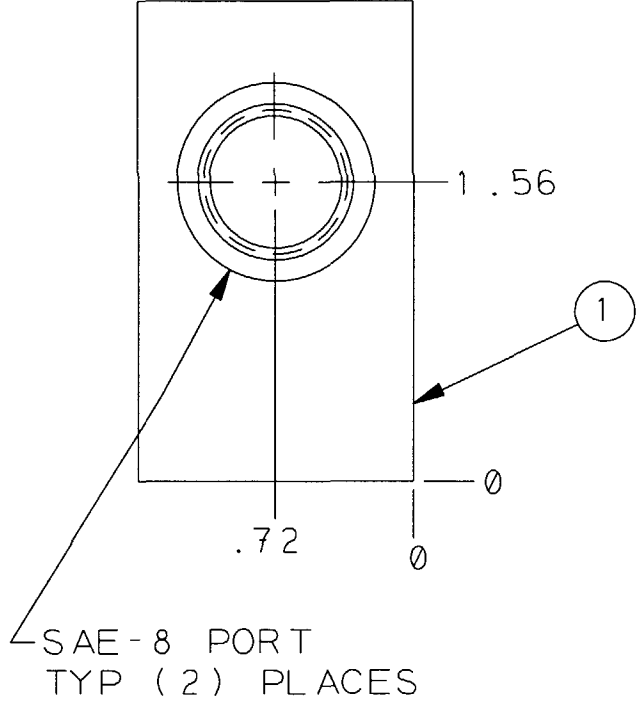
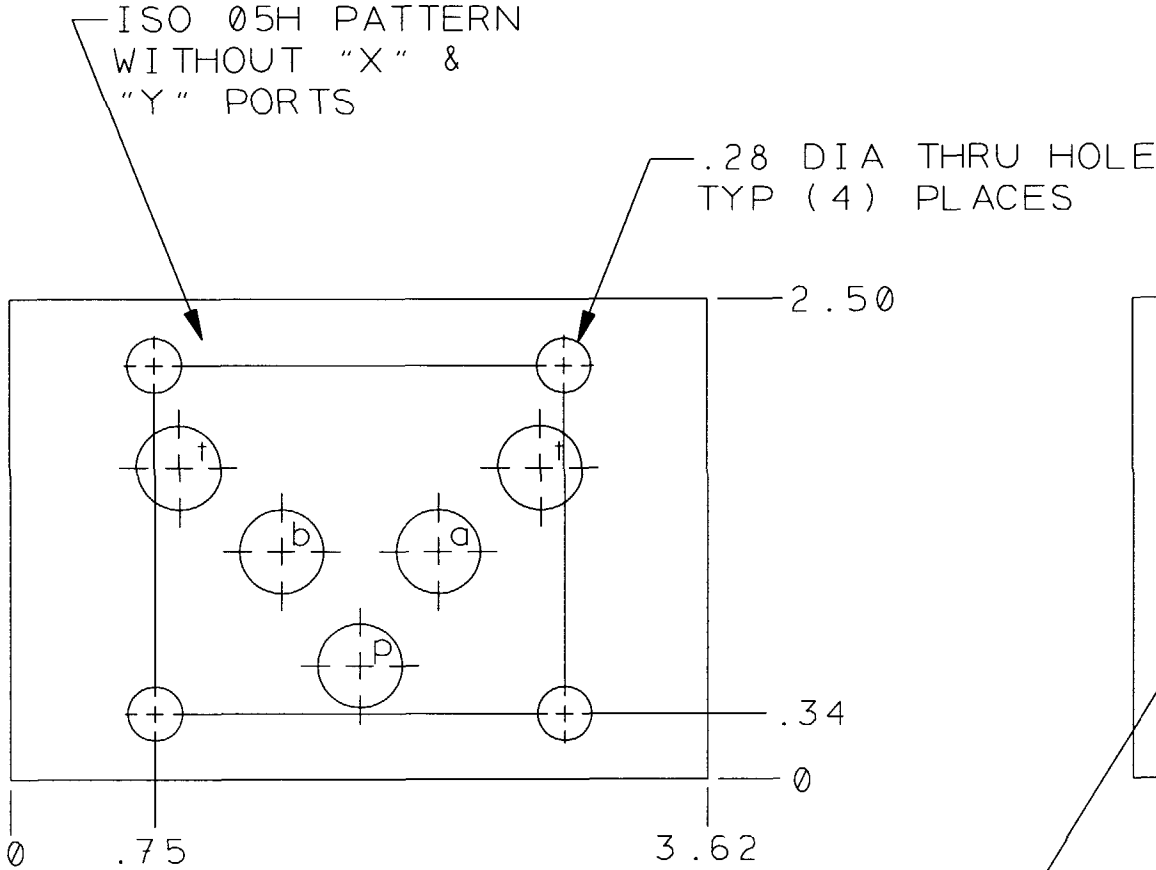
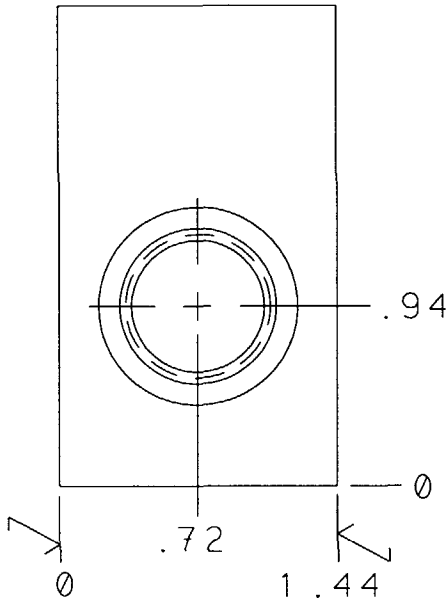
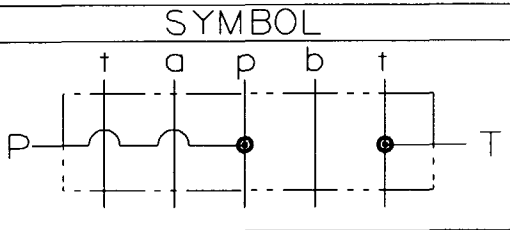


NOTES:

1)SEALS: VITON

2)ALUMINUM BODY:3000 PSI
MAXIMUM CONTINUOUS
WORKING PRESSURE.

3)ORDER SEAL KITS SEPARATELY:
FOR ISO 05 USE 990-111-003
FOR U.S. 05H USE 990-120-010
FOR CETOP 05H USE 990-120-011

4)SEAL PLATE MOUNTS ON SIDE
OPPOSITE SOLENOID VALVE

ITEM					OUTLINE			TITLE BODY-ISO 05 OR 05H TAP-IN MANIFOLD-"P" & "T" PORTS			REVISION A			PART NO. ZCA		
1	153-172	BODY	1	QTY	SCALE	REF.	MATERIAL	ALUMINUM	HEAT TREAT & FINISH							
A	SAE-8 PORTS WERE SUN STD	20 NOV95	BRS	6932	DRAWN	CHECK	RELEASE	4980								
LET	REVISION	DATE	DRN	CHK	REL	DATE	DATE	DATE								

