


SYMBOL

The symbol for a 10A thermistor (T-10A) is shown. It consists of a rectangular box with the text "T-10A" inside. The box is connected to a horizontal line with terminals "2" and "1". A vertical line connects terminal "1" to a ground symbol "G".

REVISION A	PART NO. ZCV
---------------	-----------------

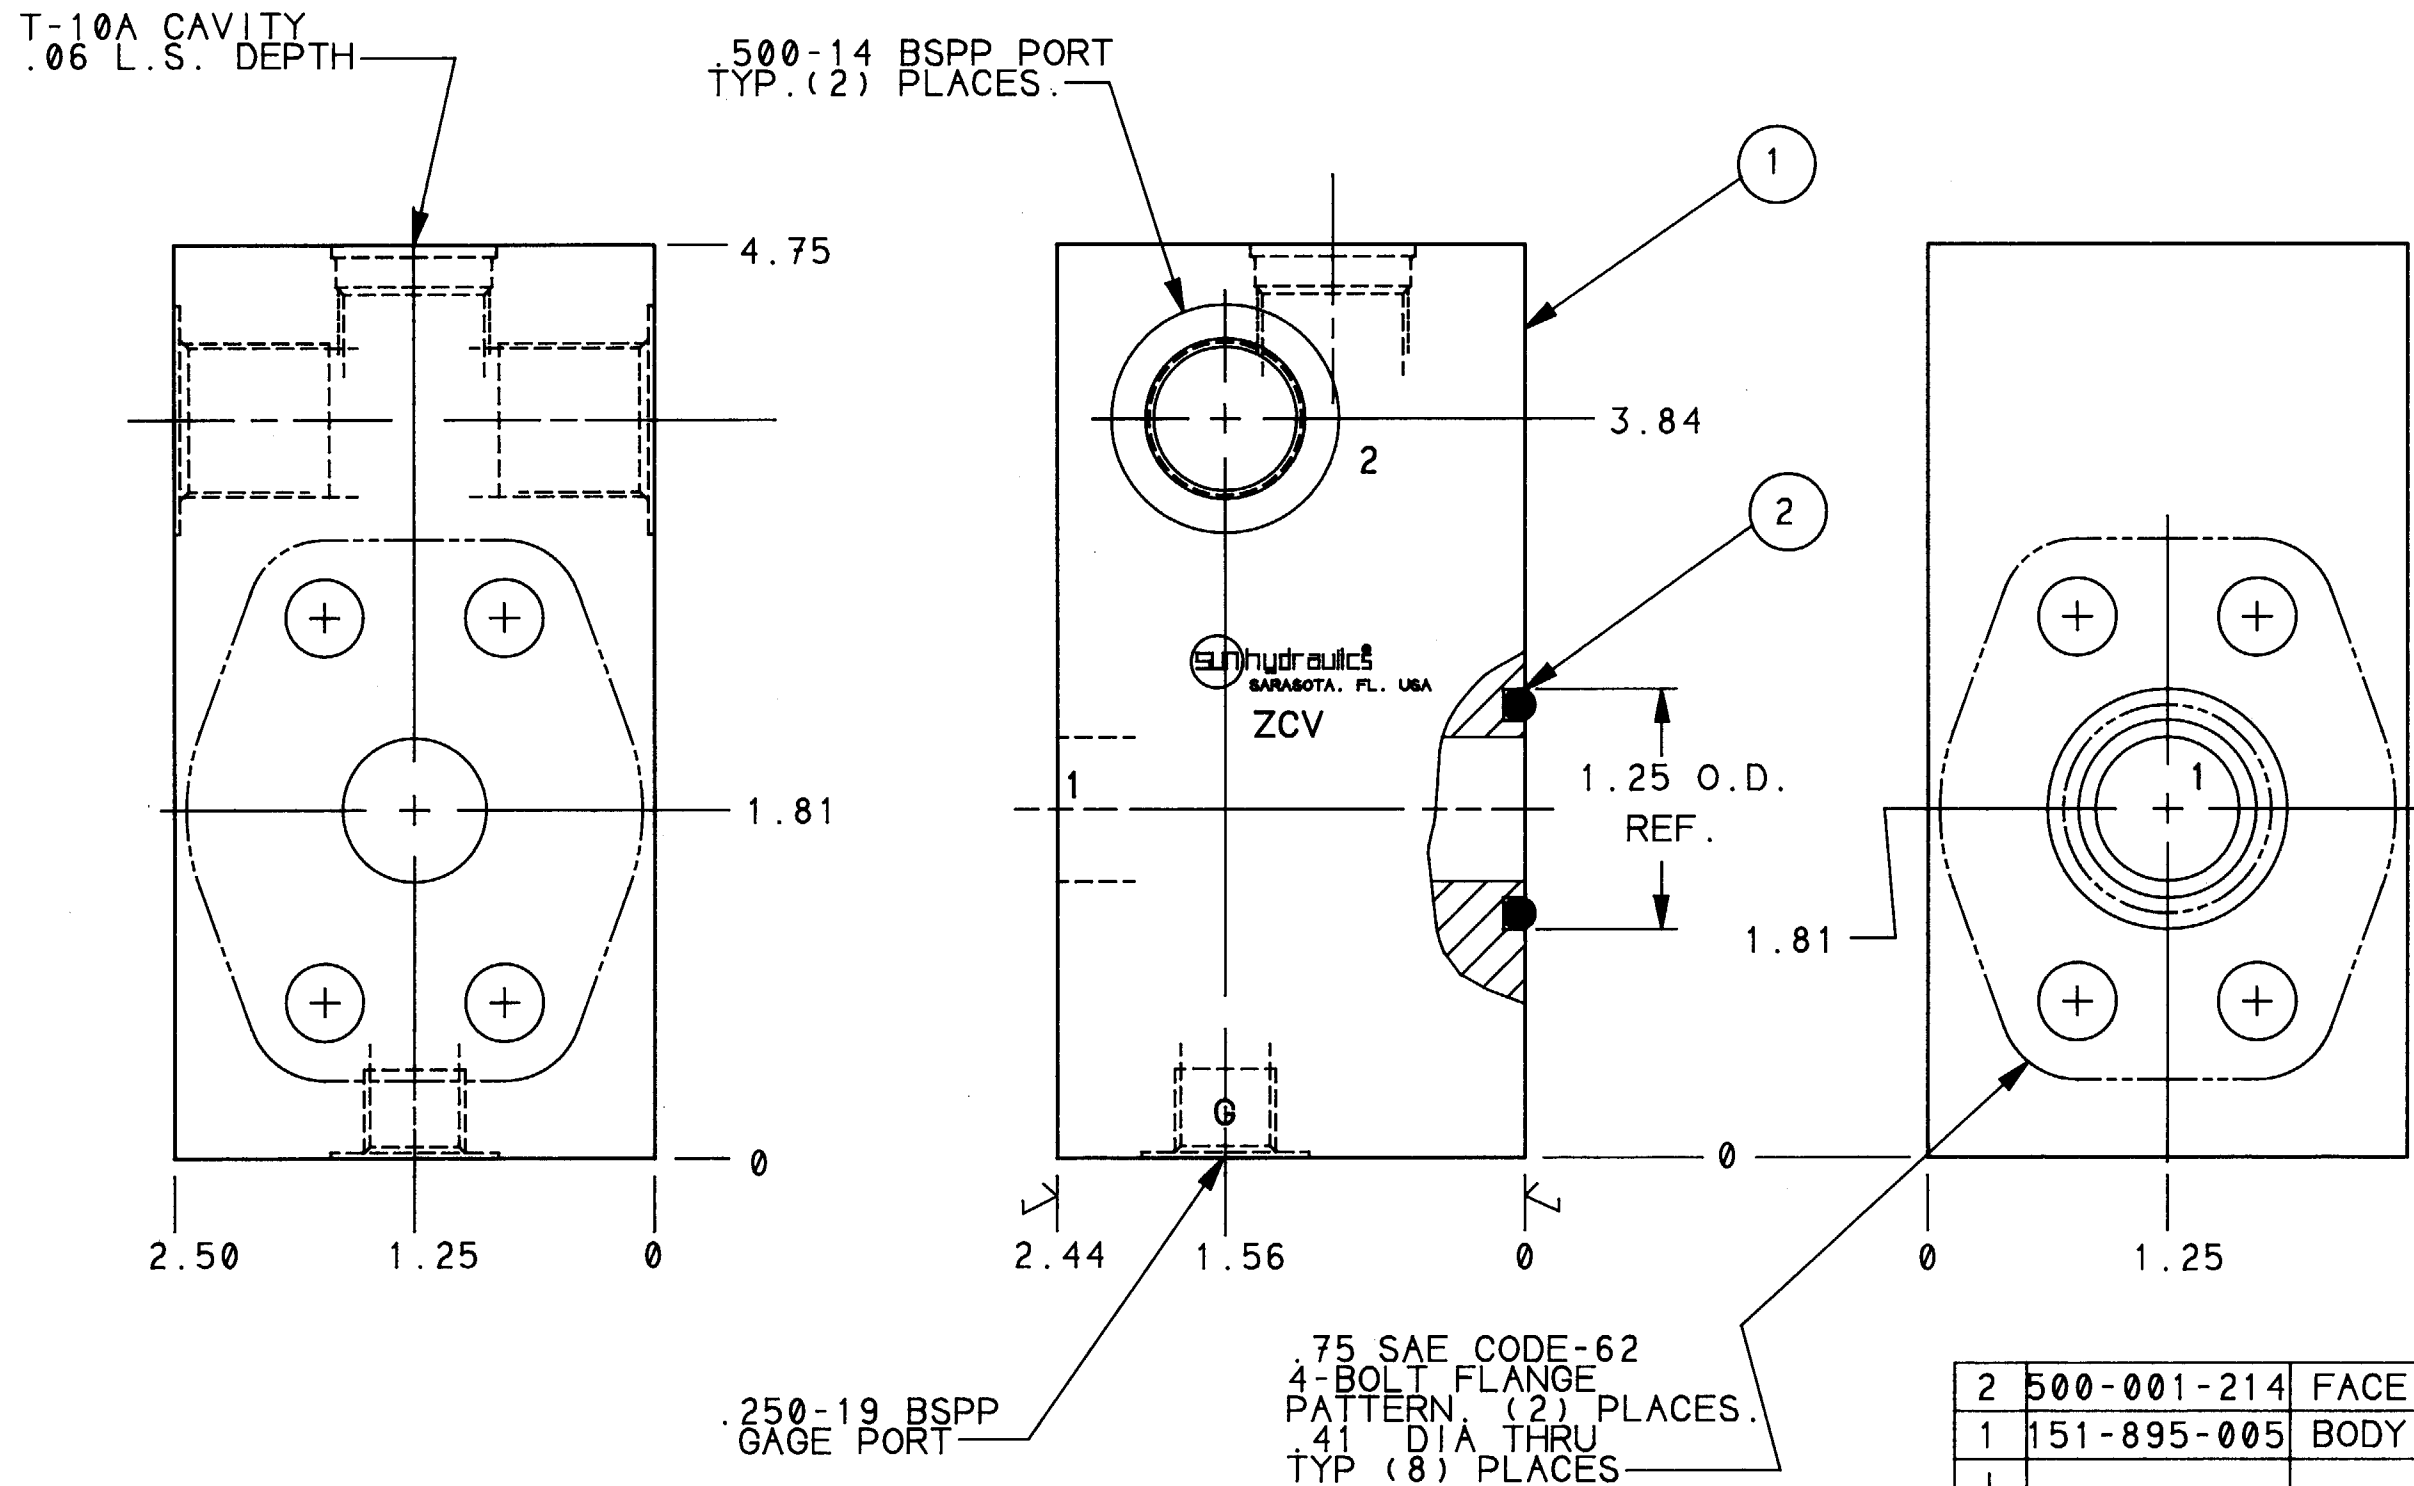

NOTES :

- 1) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
- 2) FOR OTHER OPTIONS SEE OPTION
SHEET.
- 3) SEALS: BUNA-N.

				UNLESS OTHERWISE SPECIFIED				TITLE DIRECT SAE 75 CODE 62 FLANGE MTD T-10A CAV.				REVISION A		PART NO. ZCV	
				DIMENSION TOL .X = ±.030 .XX = ±.015 .XXX = ±.005				SCALE REF. 1 = 1 CODE-61 = ZQM				MATERIAL ALUMINUM BODY			
				ANGLE TOL ±% FINISH 80✓ REMOVE ALL BURRS				DRAWN BRS CHECK R/B RELEASE 1910				HEAT TREAT & FINISH 			
A ADDED NOTE 3. .41 DIA. WAS .42.				2-28-89 BRS RJB 1980				DATE 1-9-89				DATE 1-10-89			
LET REVISION				DATE DFN CHK REL				DATE 1-12-89				 SUN hydraulics [®] CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983			