


NOTES:

- 1) SEALS: BUNA-N
- 2) STAMPING: TOUCH FACE LIGHTLY TO SANDER ON STAMPED SIDE.


SYMBOL

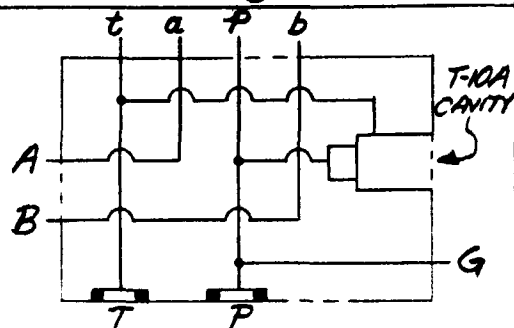

STD NFPA D02 PATTERN
.250-20 UNF x .50 DP.
TYP. (4) PLCS.



.250-18 NPTF.
GAGE PORT.

GASKET PORTS.
.500-14 NPTF.
TYP. (2) PLCS.

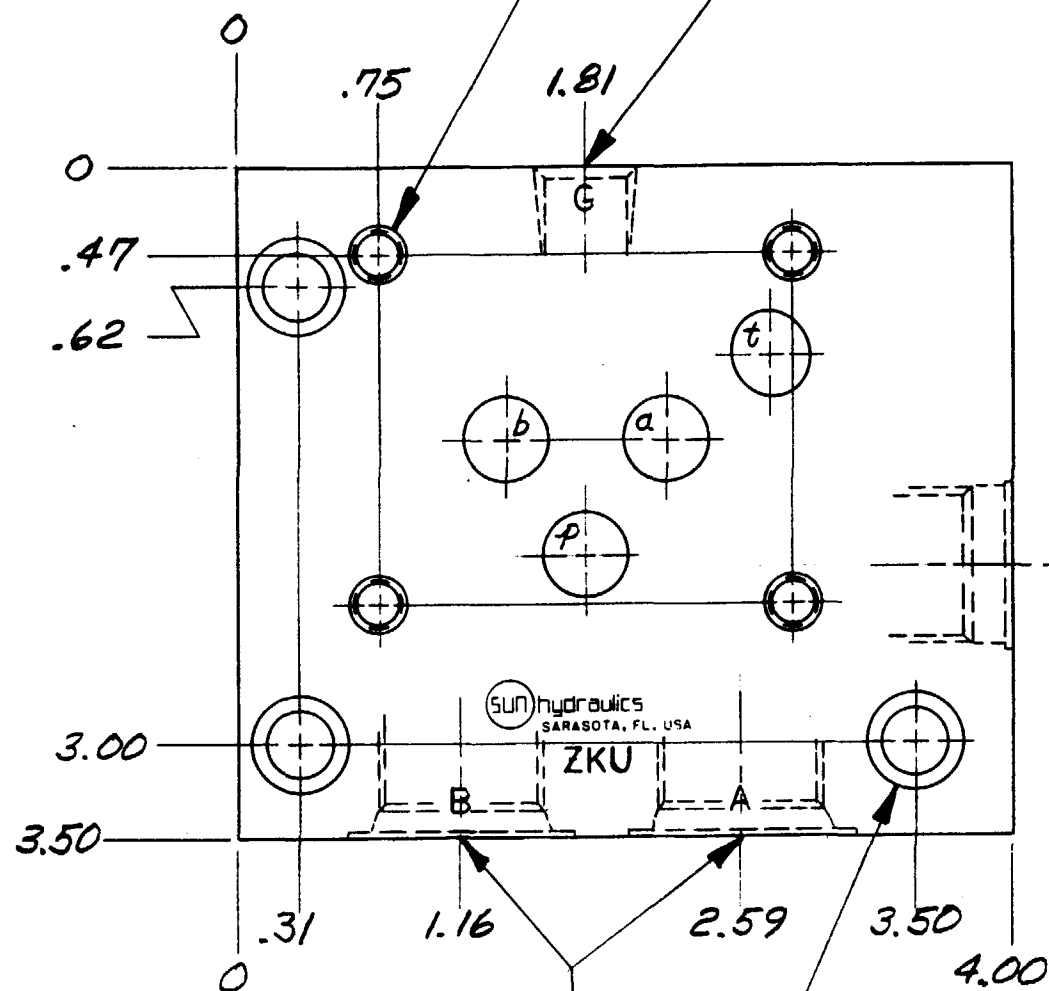

PORTS "A" & "B"
SAE-10

MOUNTING PROVISIONS.
.34 DIA. THRU.
C'SUNK .50 DIA. x .38 DP.
SEALED ON MTG FACE.
TYP. (3) PLCS.

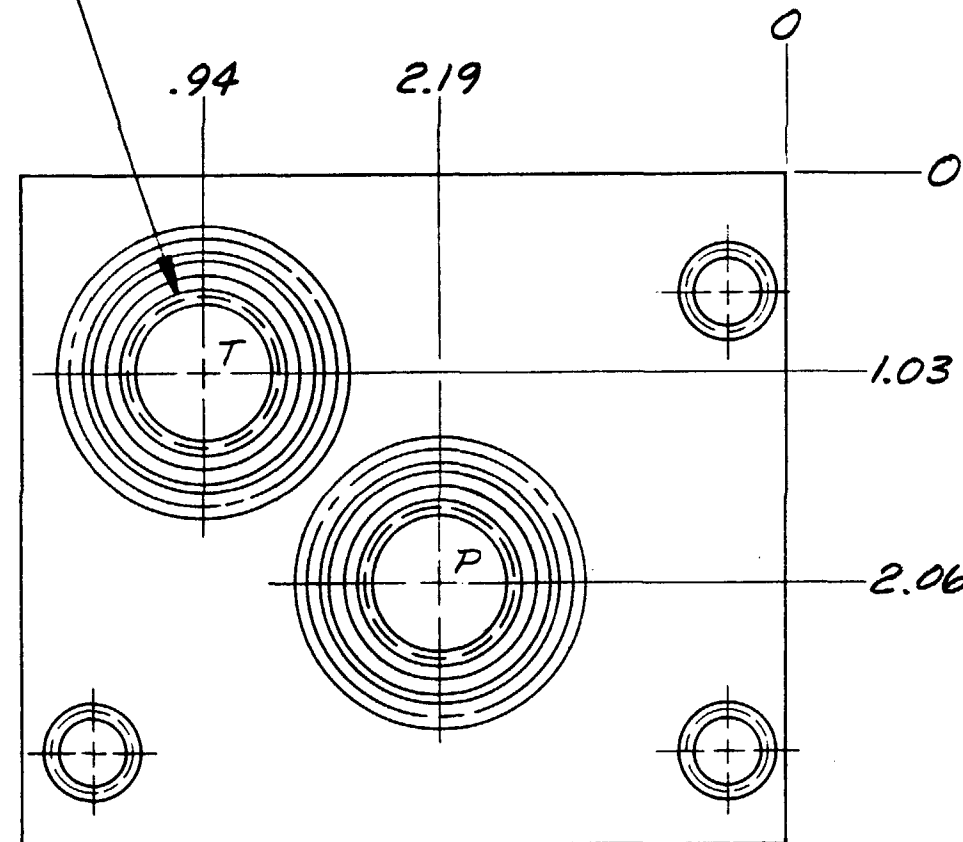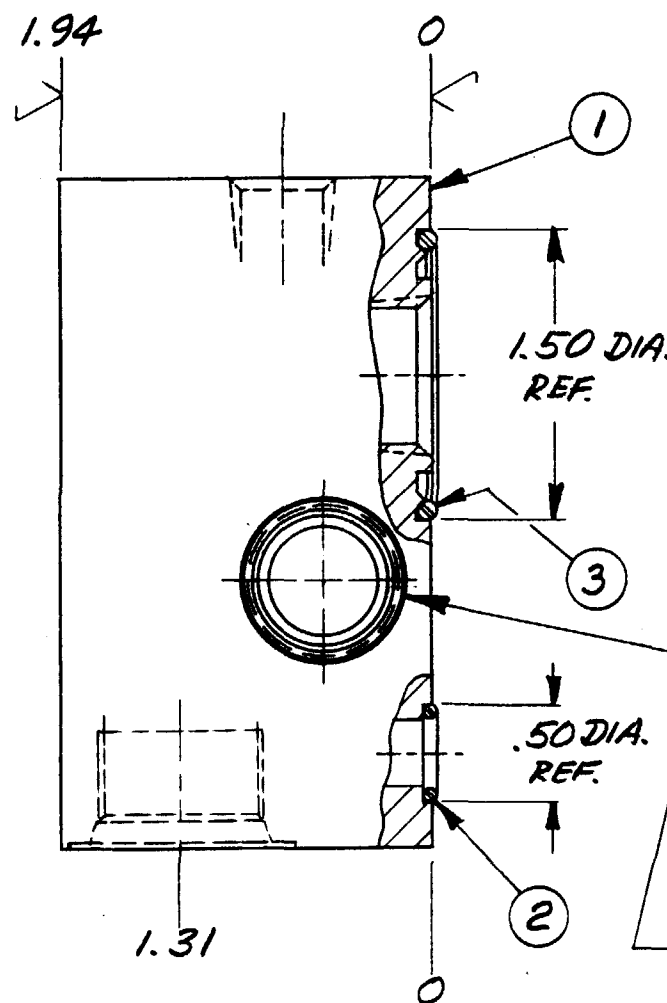

T-10A CAVITY
.031 L.S. DEPTH.

3	500-001-125	SEAL-O-RING	2
2	500-001-012	SEAL-O-RING	3
1	151-435-002	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE & ASSEMBLY

TITLE GASKET MTD. P+T RELIEF
NFPA D02 SUBPLATE.

REVISION PART NO. ZKU

UNLESS OTHERWISE SPECIFIED	DIMENSION TOL.	SCALE	REF.	MATERIAL
	.X = ± .030	1/1	ZKT	ALUMINUM
	.XX = ± .015			
	.XXX = ± .005			
	ANGLE TOL. ± 1°			
	FINISH 125V			
	REMOVE ALL BURRS			
SEALS WERE VITON	8-19-92	DATE	DRN	CHK
LET.	REVISION	DATE	DRN	CHK

DRAWN	CHECK	RELEASE
RJB	JPG	1050
DATE	DATE	DATE
4-18-86	4-21-86	4-21-86