




3RD ANGLE
PROJECTION

REVISION PART NO

ZNA

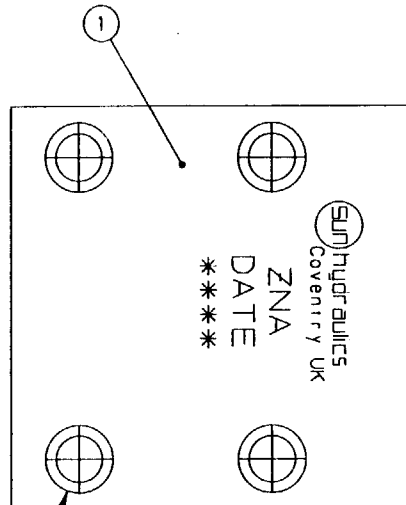

MOUNTING PROVISIONS:
.406 DIA HOLE THRO
.594 DIA C BORE x .31 DEEP
TYPICAL (4) PLACES

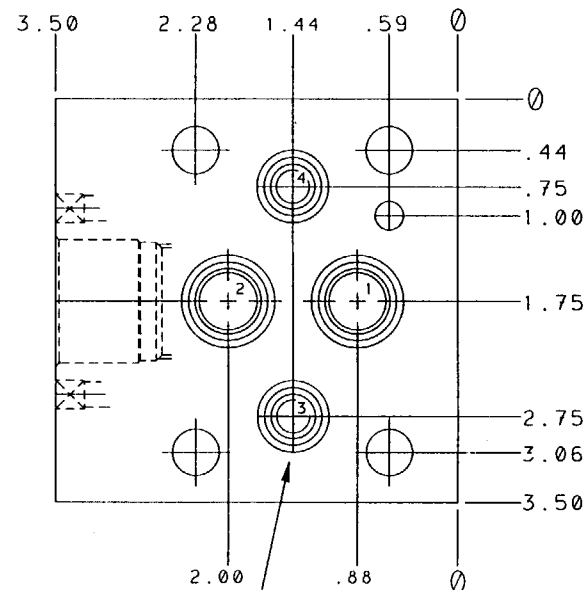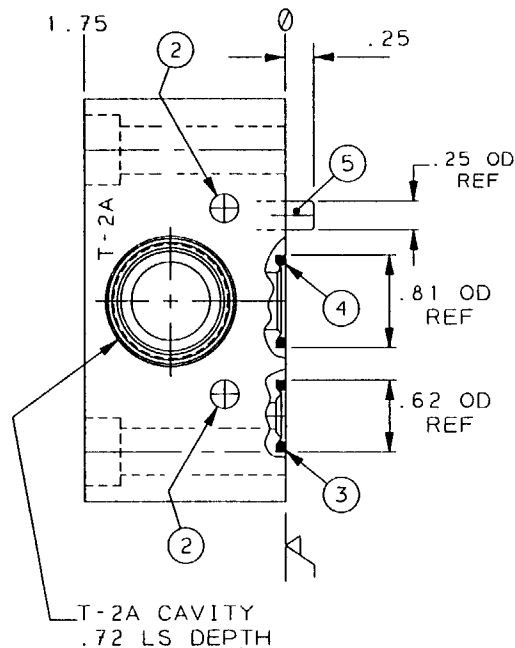


NFPA-P03
INTERFACE PATTERN

NOTES:

- 1) SEALS MATERIAL: BUNA-N
- 2) ALUMINIUM BODIES: 3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE

THIS DESIGN CAN BE USED TO REPLACE OTHER MANUFACTURERS EXISTING NFPA-P03 VALVES.
NOTE: DEPENDING ON WHICH SUN CARTRIDGE VALVE IS FITTED, DICTATES WHETHER THE
PILOT OR DRAIN LINES ARE USED (PORTS 3 OR 4), CHECK MANUFACTURERS CONNECTIONS
FOR PILOT OR DRAIN AS THEY MAY DIFFER IN SOME CASES.

SYMBOL

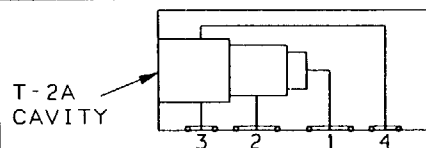

OUTLINE & ASS'Y

UNLESS
OTHERWISE
SPECIFIED

DIMENSION TOL
X ±.030
XX ±.015
XXX ±.005

ANGLE TOL ±X
FINISH 80V
REMOVE ALL
BURRS

TITLE
NFPA-P03 PATTERN
BODY - GASKET MOUNTED
T-2A CAVITY

SCALE REF. SIMILAR
1:1 TO ZQX

DRAWN
2. Madelon

CHECK
M.J.

RELEASE
DATE

DATE

MATERIAL
ALUM / SGI.

HEAT TREAT & FINISH

REVISION PART NO.

ZNA

SUN hydraulics
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983