


3RD ANGLE
PROJECTION


REVISION PART NO

ZNE

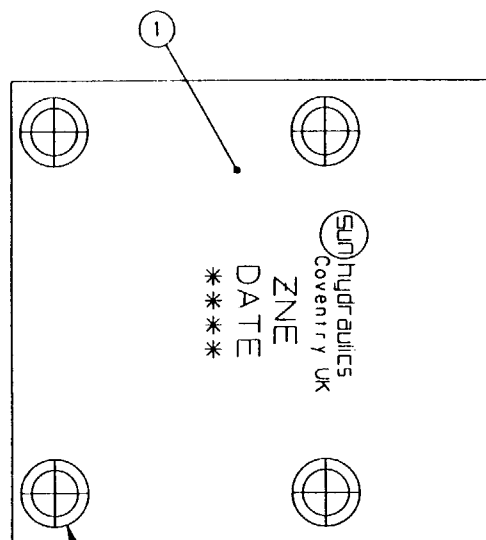


MOUNTING PROVISIONS:
.406 DIA HOLE THRO
.594 DIA C'BORE x .25 DEEP
TYPICAL (4) PLACES

T-17A CAVITY
.91 LS DEPTH

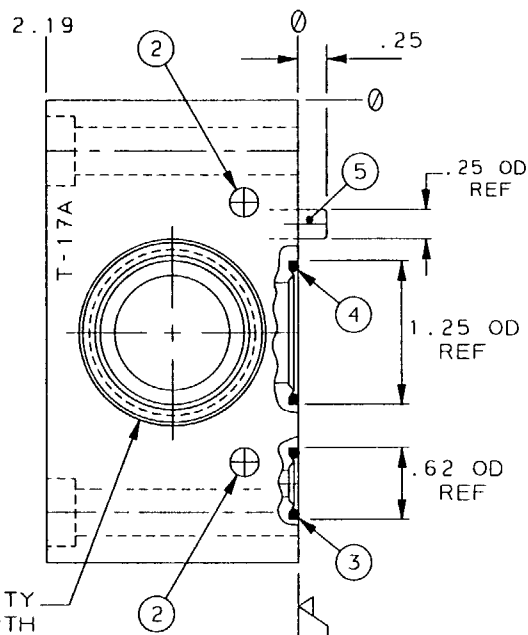

NOTES:


- 1) SEALS MATERIAL: BUNA-N
- 2) ALUMINIUM BODIES: 3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE

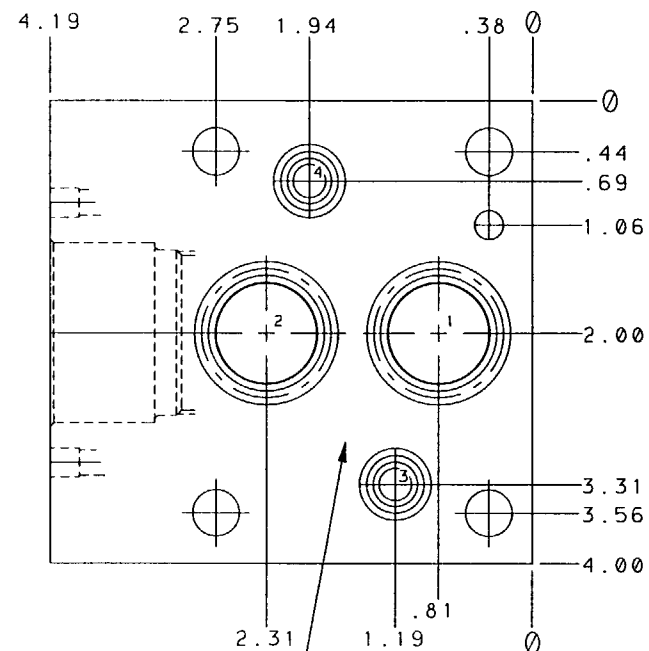

NFA-P06
INTERFACE PATTERN

THIS DESIGN CAN BE USED TO REPLACE OTHER MANUFACTURERS EXISTING NFA-P06 VALVES.
NOTE: DEPENDING ON WHICH SUN CARTRIDGE VALVE IS FITTED, DICTATES WHETHER THE
PILOT OR DRAIN LINES ARE USED (PORTS 3 OR 4), CHECK MANUFACTURERS CONNECTIONS
FOR PILOT OR DRAIN AS THEY MAY DIFFER IN SOME CASES.

SYMBOL

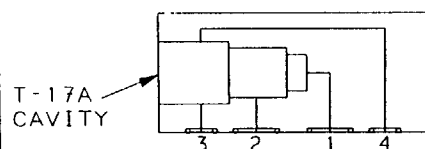

OUTLINE & ASS'Y

UNLESS
OTHERWISE
SPECIFIED

DIMENSION TOL
X ± .030
XX ± .015
XXX ± .005

ANGLE TOL ± 1/2°
FINISH 80V
REMOVE ALL
BURRS

TITLE
BODY - NFA-P06 PATTERN
GASKET MOUNTED
T-17A CAVITY

SCALE REF. SIMILAR
1:1 TO ZQY

DRAWN CHECK RELEASE
G. Madden MJ

DATE DATE DATE
16 JAN 92 05 DEC 92

MATERIAL
ALUM / SGI.

HEAT TREAT & FINISH

REVISION PART NO

ZNE

SUN hydraulics
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983

5	811-001-002	ROLL PIN	1
4	500-001-121	O-RING SEAL	2
3	500-001-111	O-RING SEAL	2
2	850-004-250	KOENIG PLUG	2
1	159-690	BODY	1
ITEM	PART NO.	PART NAME	QTY