





T-16A CAVITY
L.S. DEPTH-.062

METRIC: M12 X 1.75-6H X 1.06 FULL TH'D DEPTH.
INCH: .500-13UNC X 1.06 FULL TH'D. DEPTH
TYP. (4) PLACES, BOTH SIDES.

PORTS #2
1.50 SAE CODE-61
4-BOLT FLG. PATTERN
TYP. BOTH SIDES.

MODEL NO	BODY DASH NO.	FLANGE TH'D. TYPE	GAGE PORT
ZQA	-001	INCH	1/4 NPTF
ZQA/M	-002	METRIC	1/4 BSPP

FOR OTHER OPTIONS
SEE OPTION 6HT.

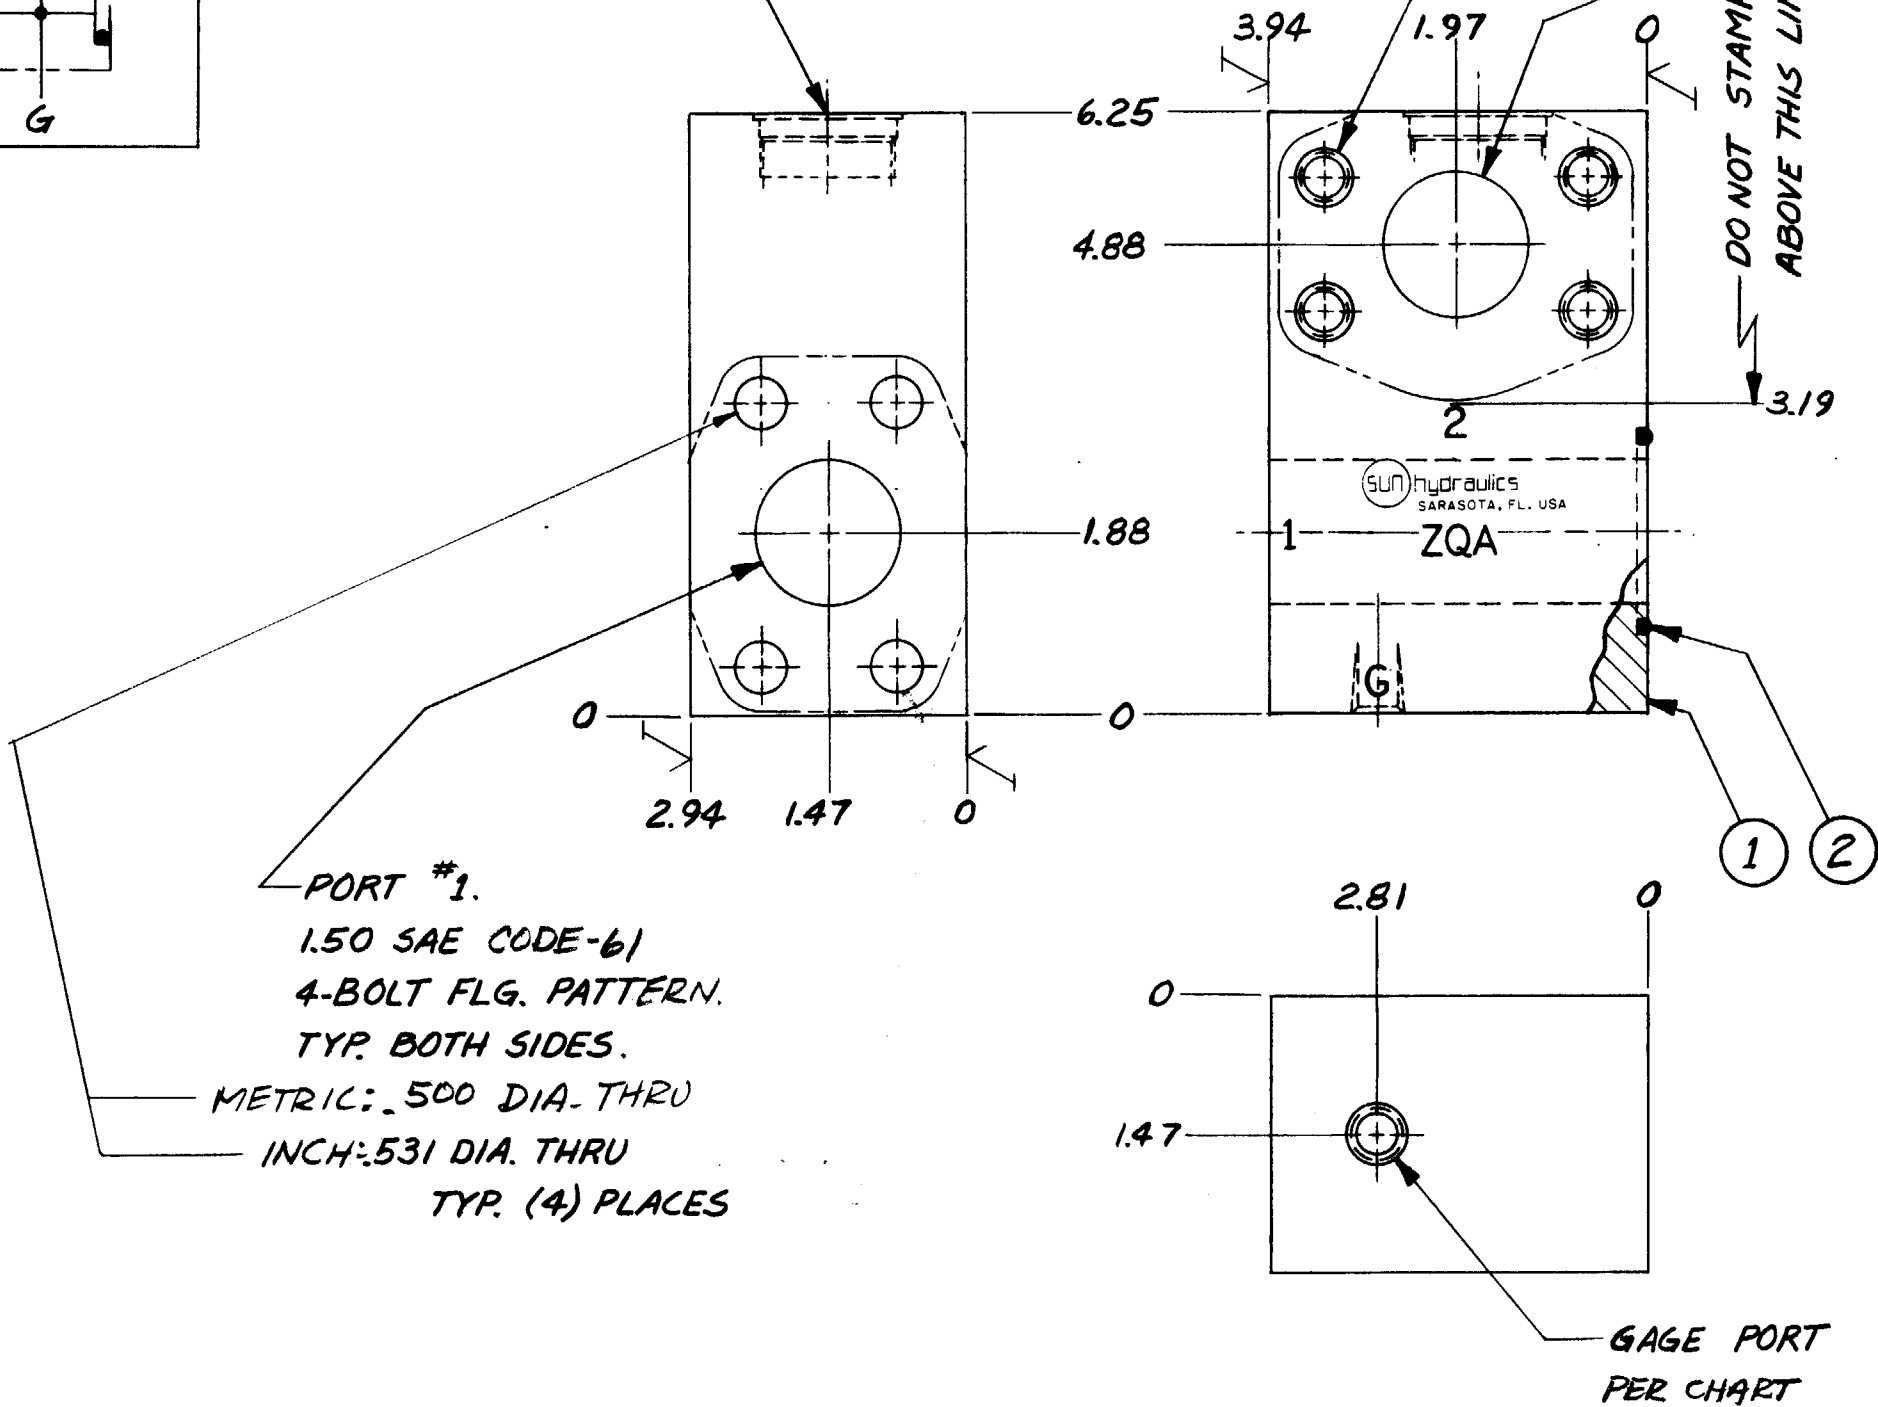

PORT #1.
1.50 SAE CODE-61
4-BOLT FLG. PATTERN.
TYP. BOTH SIDES.

METRIC: .500 DIA. THRU
INCH: .531 DIA. THRU
TYP. (4) PLACES

NOTE:
1) ALUMINUM BODIES - 3000 PSI
MAX. CONTINUOUS SERVICE PRESSURE.

2	500-001-225	SEAL "O" RING	1
1	151-092-SEE	BODY	1
ITEM	PART NO.	PART NAME	QTY

						UNLESS OTHERWISE SPECIFIED	TITLE	REVISION	PART NO.
							BODY - RELIEF, 1½ SAE 4-BOLT SANDWICH	A	ZQA
						DIMENSION TOL .x = ± .030 .xx = ± .015 .xxx = ± .005	SCALE REF. 1/2 CODE-62 = ZBJ.	MATERIAL ALUM.	
						ANGLE TOL. ± 1° FINISH 125V REMOVE ALL BURRS	DRAWN CHECK RELEASE RJB RJC 609	HEAT TREAT & FINISH	
							DATE DATE DATE 8-28-84 8-29-84 8-29-84	X	
A	ADDED TABLE # -002 O-RING WAS 500-101-225					1/24/89 RB AS 10/35			
LET.	REVISION					DATE DRN CHK REL			
 SUN hydraulics® CORPORATION SARASOTA, FLORIDA TELEPHONE 813/355-2983									