
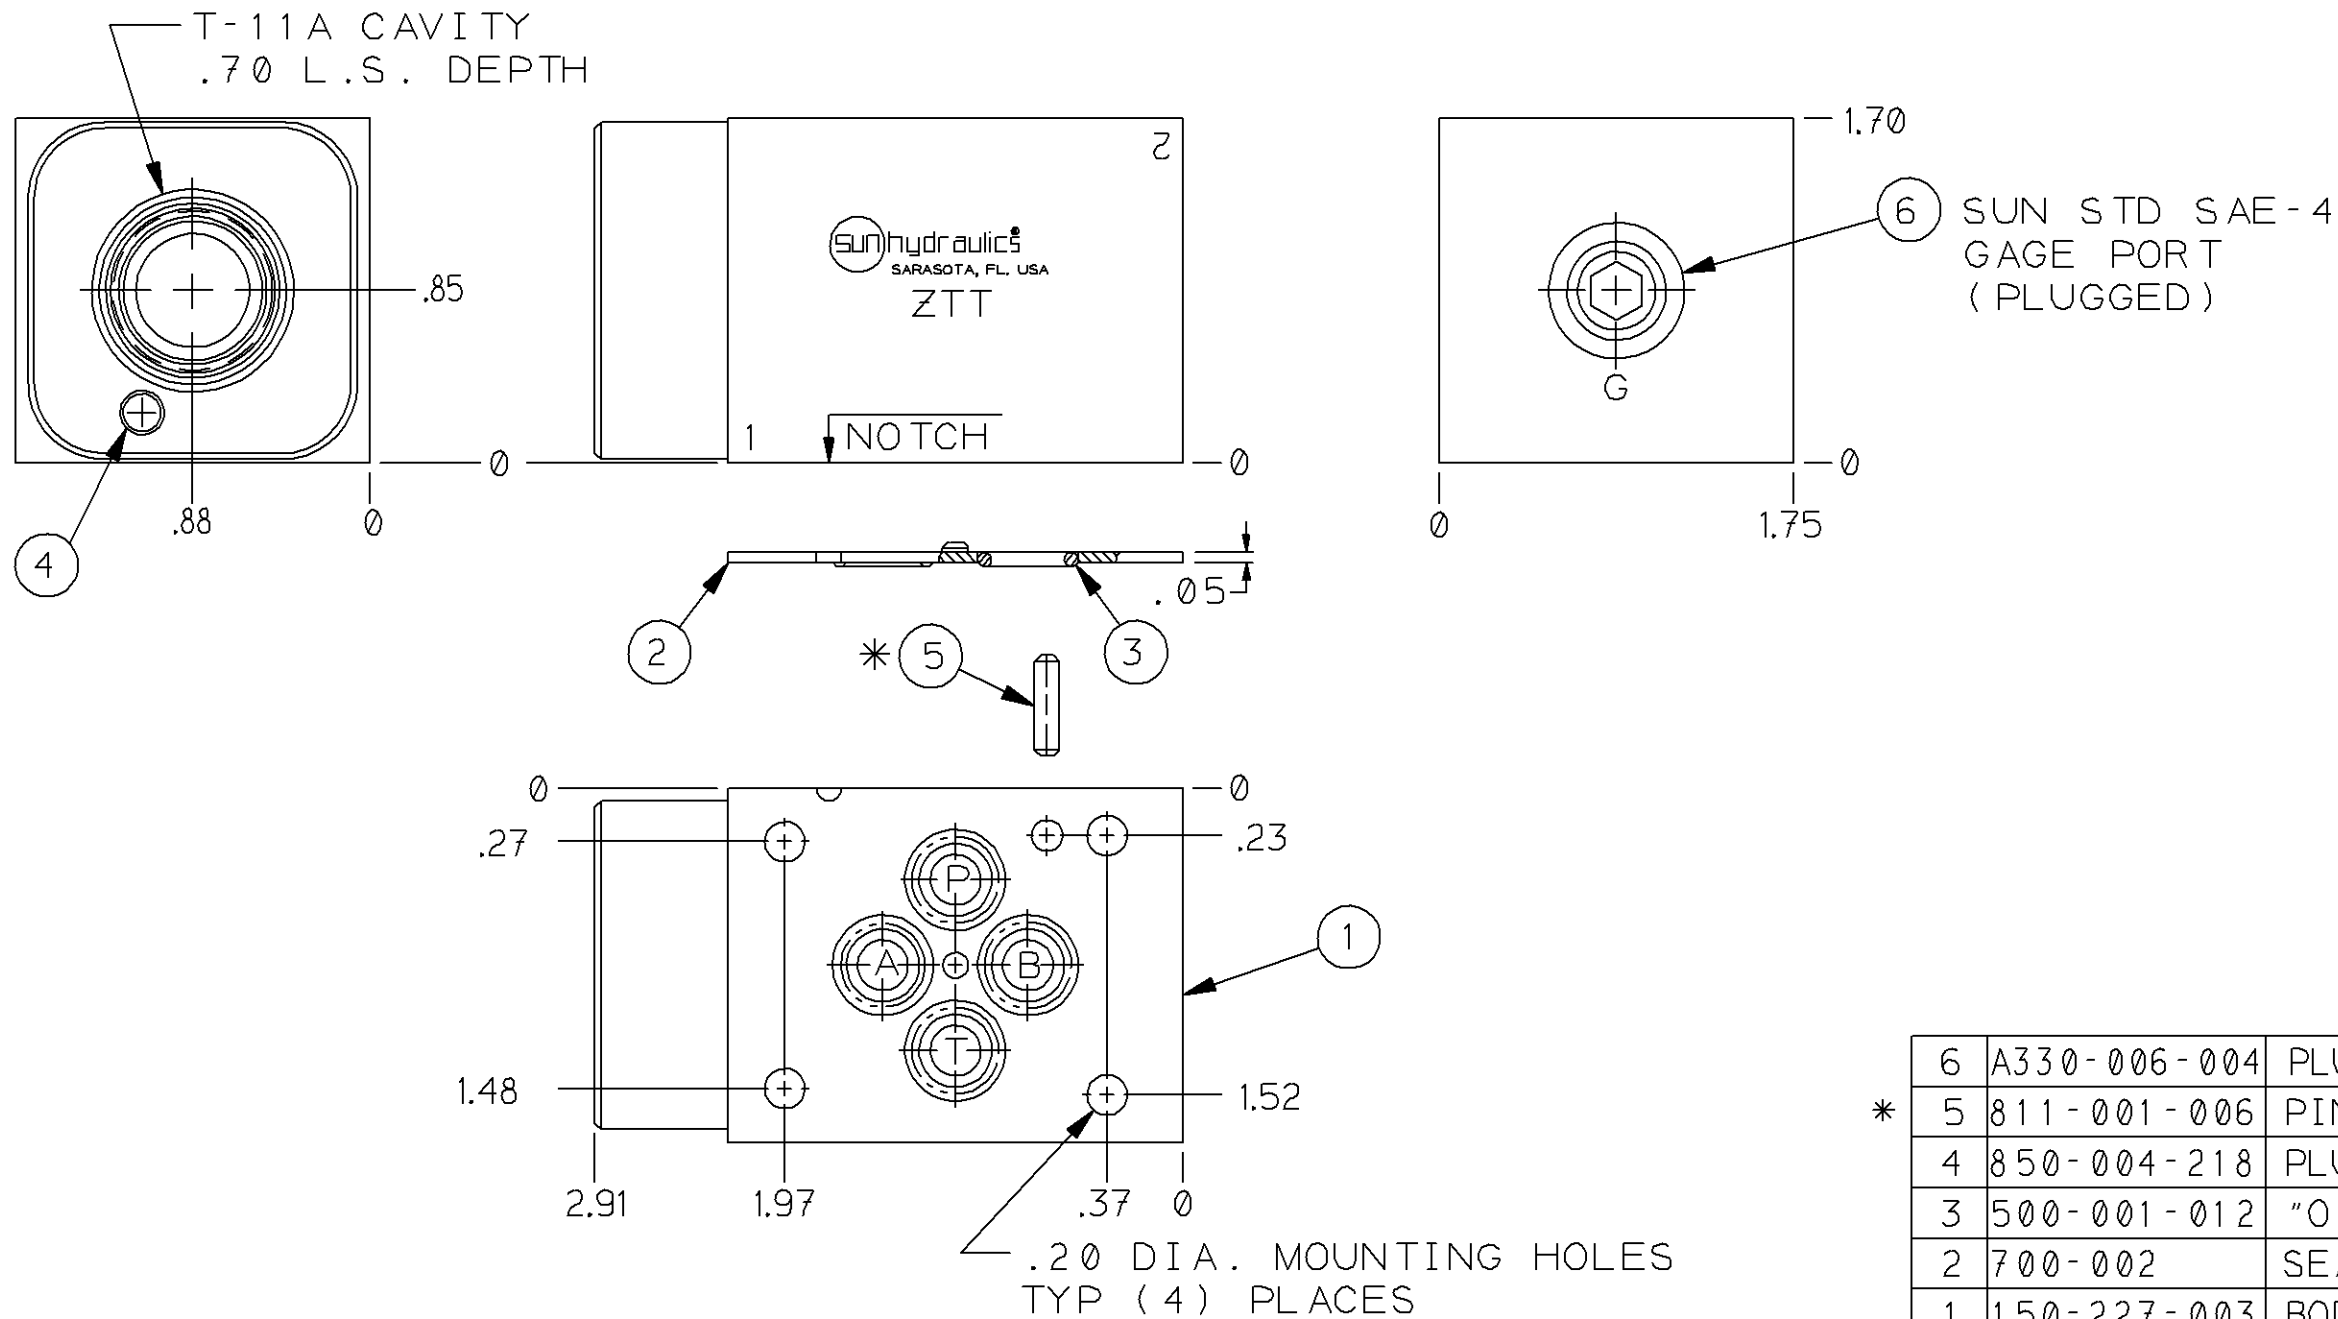
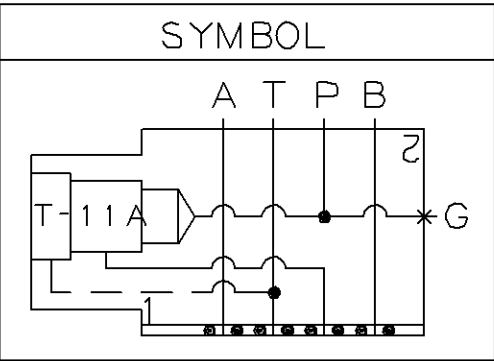




NOTES :

- 1) SEALS : BUNA-N
- 2) ALUMINUM BODIES - 3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE .
- *3) CUSTOMER TO INSTALL LOCATING
PIN (ITEM 5) FOR FUNCTIONAL
ORIENTATION DESIRED .

6	A330-006-004	PLUG	1
* 5	811-001-006	PIN	1
4	850-004-218	PLUG	1
3	500-001-012	"O"RING	4
2	700-002	SEAL PLATE	1
1	150-227-003	BODY	1
ITEM	PART NO.	PART NAME	QTY

						UNLESS OTHERWISE SPECIFIED	TITLE ISO 03 SANDWICH-T-11A CAV. ON P PORT #3 TO TANK, REDUCING			REVISION B	PART NO. ZTT
						DIMENSION TOL .x = ±.030 .xx = ±.015 .xxx = ±.005	SCALE 1 / 1	REF.	MATERIAL ALUMINUM & NOTED		
					ANGLE TOL ± 1/4 FINISH 80✓ REMOVE ALL BURRS	DRAWN BR5	CHECK	RELEASE	HEAT TREAT & FINISH		
						DATE 08DEC93	DATE	DATE 08DEC93			
B	COMBINED ITEM'S #6 & 7	13MAR02	MWB	DSS	11253						
A	CAV DEPTH WAS .69	01DEC00	DSS	SMS	10175						
LET	REVISION	DATE	DRN	CHK	REL						