SYMBOL

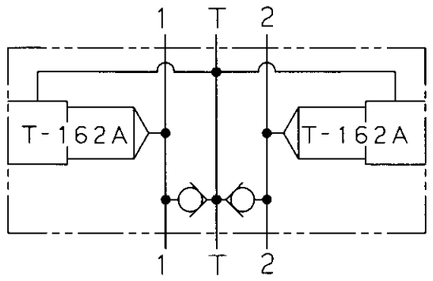

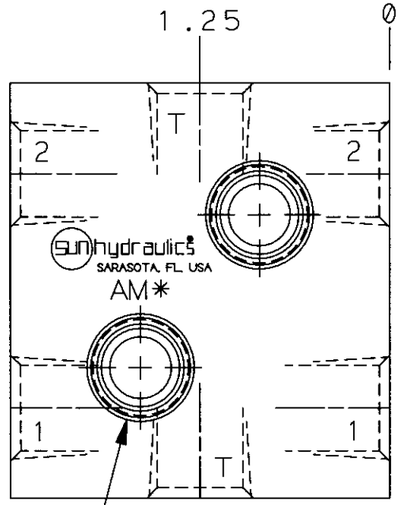

T-162A CAVITY
.062 L.S. DEPTH
TYP (2) PLACES

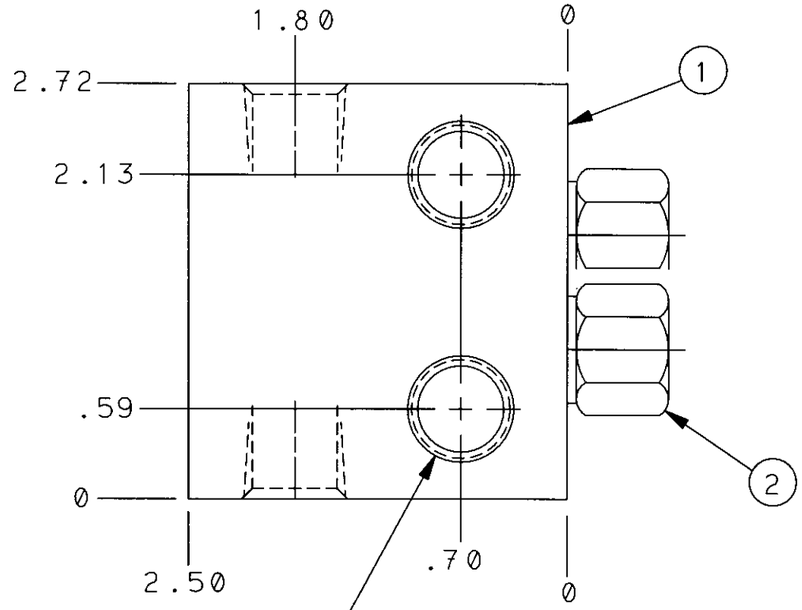

PORT PER CHART
TYP (6) PLACES

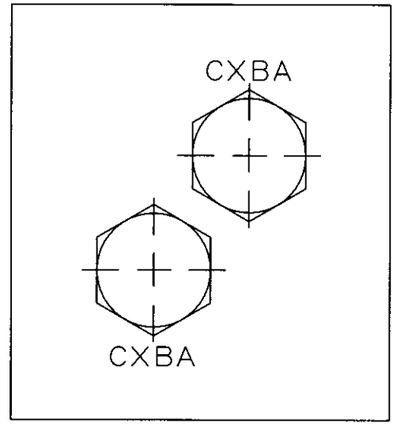

NOTES:
1) SEALS: BUNA-N
2) ALUMINUM BODIES-3000 PSI MAX. CONTINUOUS SERVICE PRESSURE.
3) CXBA XAN CARTRIDGE:
   CRACK. PRESS.: 4 +/-1 PSI
   CHECK SEAT: STEEL
4) ORDERING INFO:
   RDBA LAN AM*
   - AM* = PORT DESIGNATION
   - RDBA LAN = CARTRIDGE TO BE INSTALLED IN T-162A CAVITIES. SEAL TYPE IN RELIEF CART. DETERMINES ITEM 2 SEAL TYPE.

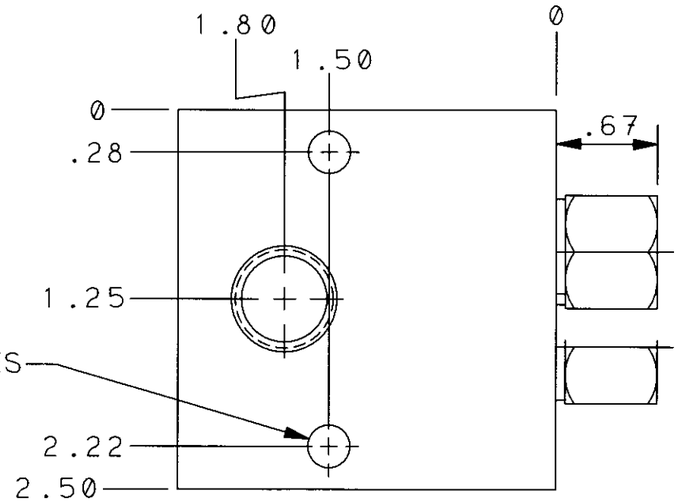

.28 DIA THRU
MT'G HOLE
TYP (2) PLACES

MODEL NO.	ALL PORTS	BODY DASH NO.
AMA	.250-18 NPTF	-001
AMB	.375-18 NPTF	-002
AMH	SUN STD SAE-4	-003
AMI	SUN STD SAE-6	-004
AMT	.250-19 BSPP	-005
AMU	.375-19 BSPP	-006

ITEM	PART NO.	PART NAME	QTY
2	CXBA XAN	CHECK VALVE	2
1	154-361-***	BODY	1

OUTLINE & ASSEMBLY

LTR	REVISION	DATE	DRN	CHK	REL

DIMENSION TOL
.XX = +/- .015
.XXX = +/- .005
MACHINING STANDARD S-188
ANGLE TOL +/- 1°
FINISH 80
REMOVE ALL BURRS .005 MAX. BREAK

TITLE T-162A CROSSPORT RELIEF WITH ANTI-CAV. CHECKS

SCALE	REF	MATERIAL
1 : 1		ALUMINUM

DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH
DAS	MAE	9170	
DATE 23MAR99	DATE 26MAR99	DATE 26MAR99	

REVISION: AM*
PART NO.: AM*

sun hydraulics CORPORATION
1500 WEST UNIVERSITY PKWY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (941) 362-1200