


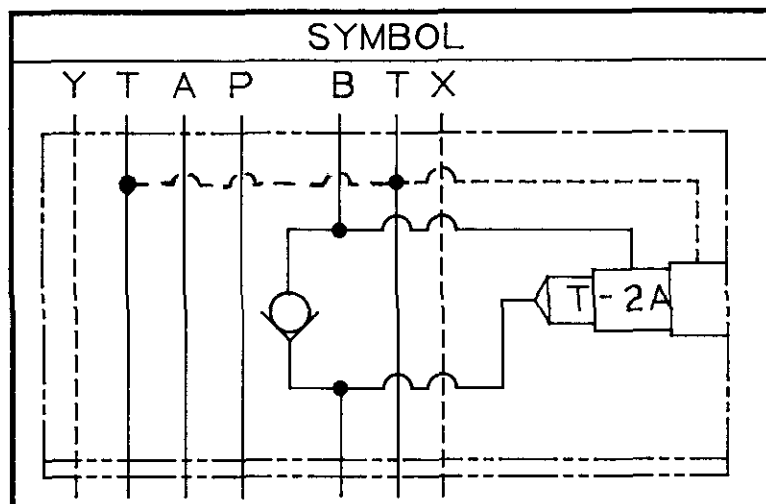
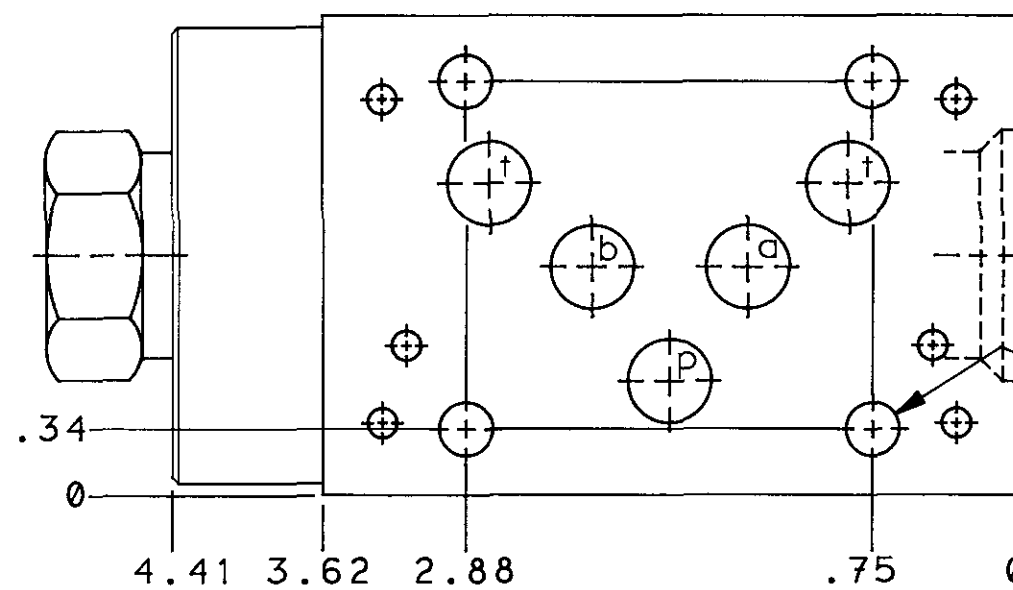


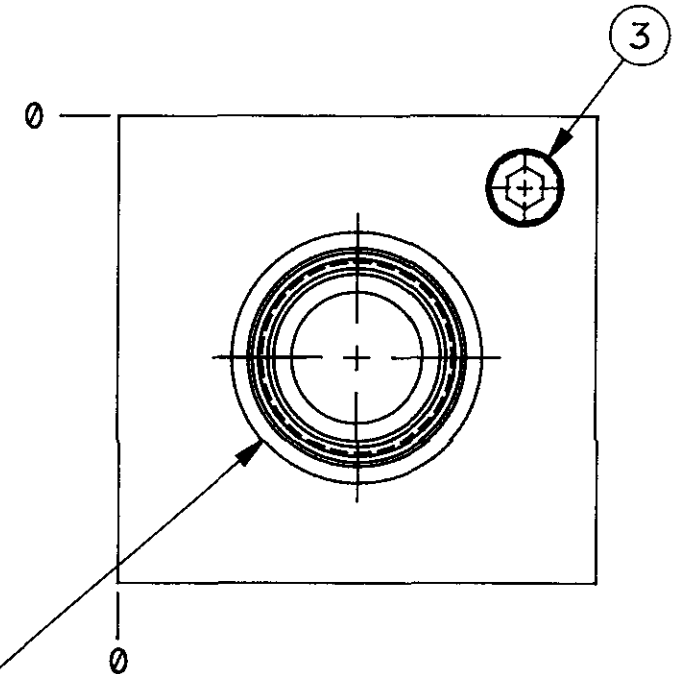

REVISION	PART NO.
B	BJ3

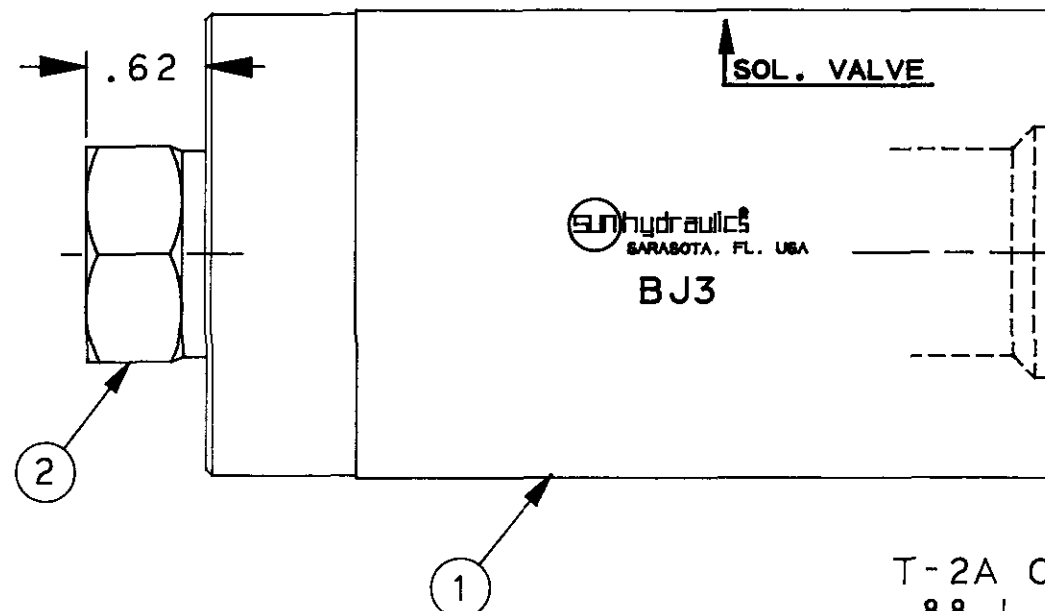

.28 DIA. MTG.
HOLES
TYP (4) PLACES

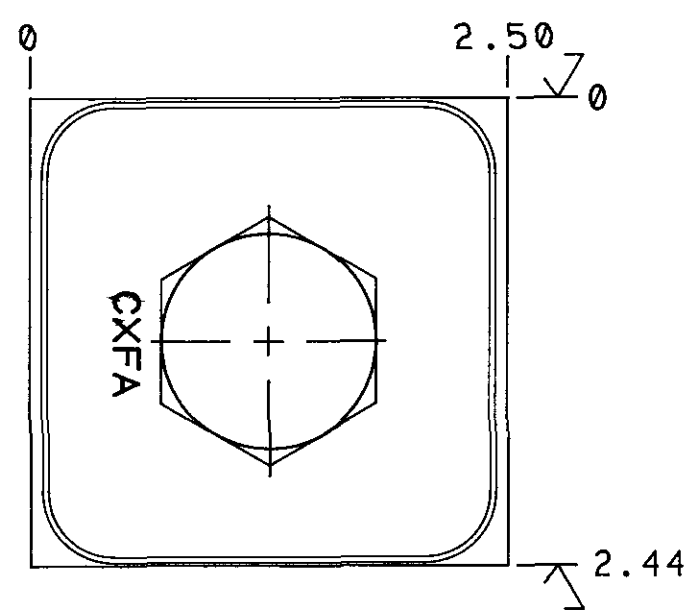

NOTES:

- 1) SEALS: BUNA-N
- 2) ALUMINUM BODIES-3000 PSI MAX. CONTINUOUS SERVICE PRESSURE.
- 3) CXFA XCN CARTRIDGE:
CRACKING PRESSURE: 30 PSI ± 3
CHECK SEAT: STEEL
- 4) INSTALLATION REQUIRES SEAL KIT:
990-120-010 FOR D02H(U.S.)
990-120-011 FOR D02H(CETOP)
- 5) ORDERING INFO:
PBFB LAN BJ3:

CART. TO BE INSTALLED
IN T-2A CAVITY. SEAL
TYP IN PBFB DETERMINES
ITEM 2 SEAL TYPE

T-2A CAVITY
.88 L.S. DEPTH

3	340-002	PIPE PLUG	1
2	CXFA XCN	CHECK VALVE	1
1	150-714	BODY	1
ITEM	PART NO.	PART NAME	QTY

UNLESS OTHERWISE SPECIFIED					TITLE			REVISION		PART NO.	
DIMENSION TOL					02H SANDWICH-			B		BJ3	
.x = $\pm .030$					W/REVERSE FF CHECK						
.xx = $\pm .015$					SCALE REF.						
.xxx = $\pm .005$					1 = 1 YPET LAN						
ANGLE TOL $\pm \%$					DRAWN						
FINISH 80 $\checkmark$					CHECK						
REMOVE ALL BURRS					RELEASE						
					DATE						
					7/30/91						
					8-1-91						
					8-5-91						

