




T-2A CAVITY
.88 L.S. DEPTH

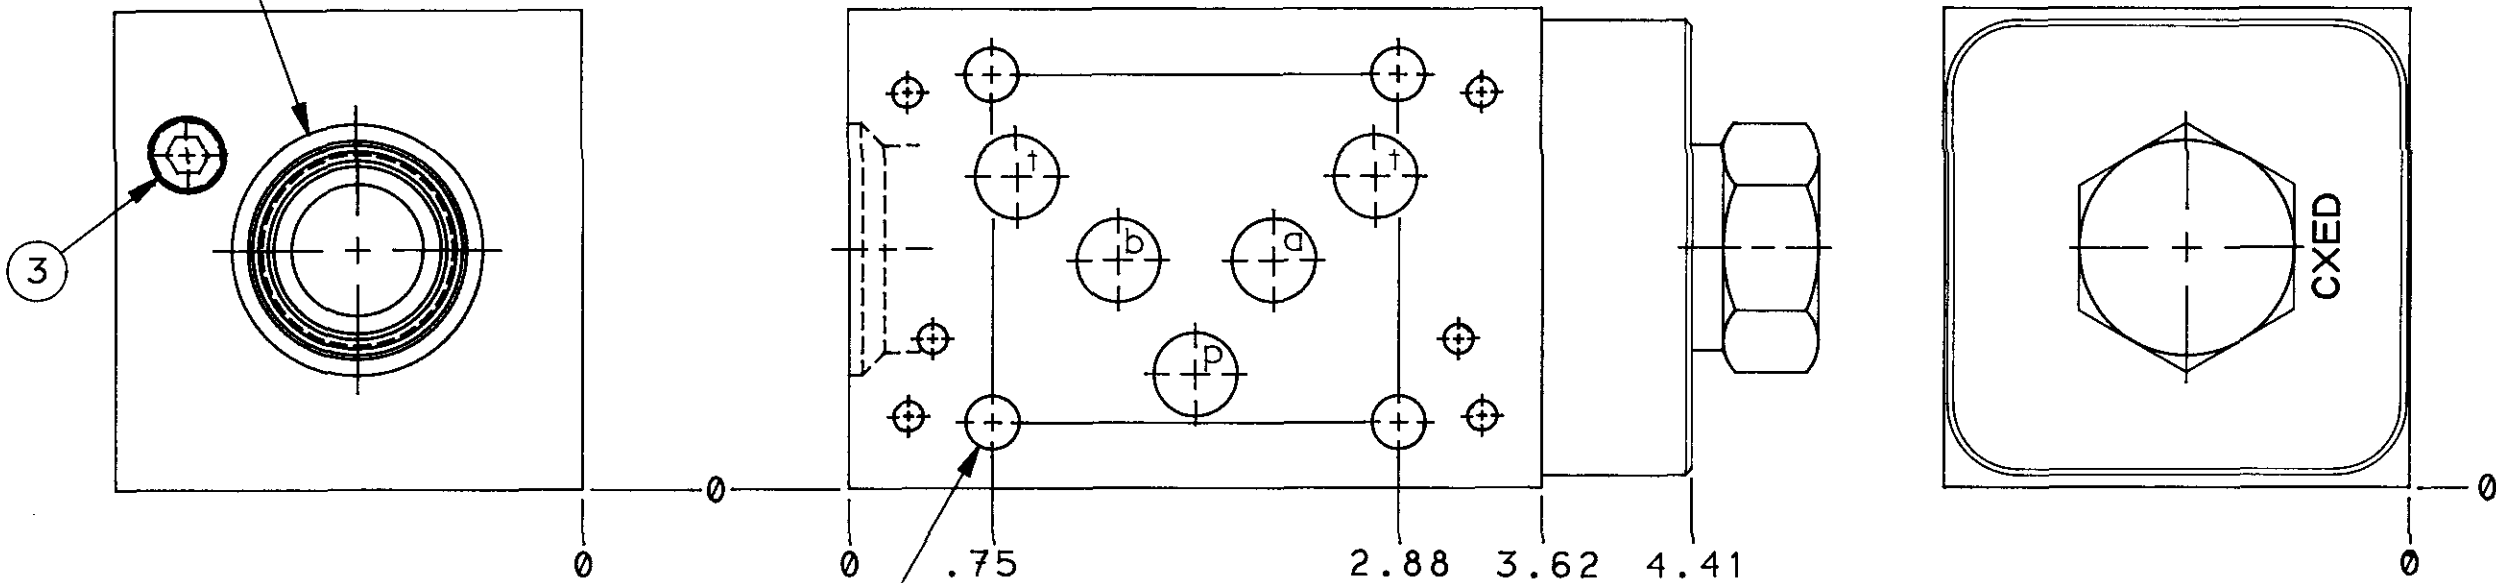

NOTES:

- 1)SEALS:BUNA-N
- 2)ALUMINUM BODIES-3000 PSI MAX. CONTINUOUS SERVICE PRESSURE.
- 3)CXED XAN CARTRIDGE:
CRACKING PRESSURE: 4 PSI ±1
CHECK SEAT:STEEL
- 4)INSTALLATION REQUIRES SEAL KIT:
990-120-010 FOR D02H(U.S.)
990-120-011 FOR D02H(CETOP)
- 5)ORDERING INFO:
RSFC LAN BJ4:

CART. TO BE INSTALLED
IN T-2A CAVITY. SEAL
TYP IN RSFC DETERMINES
ITEM 2 SEAL TYPE

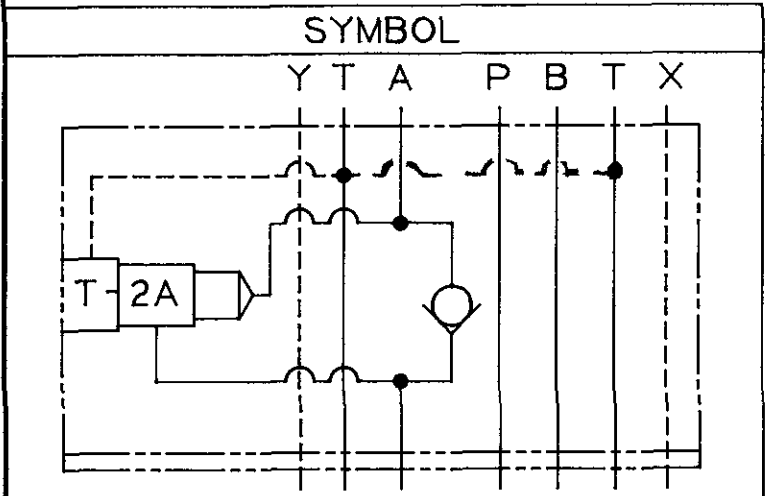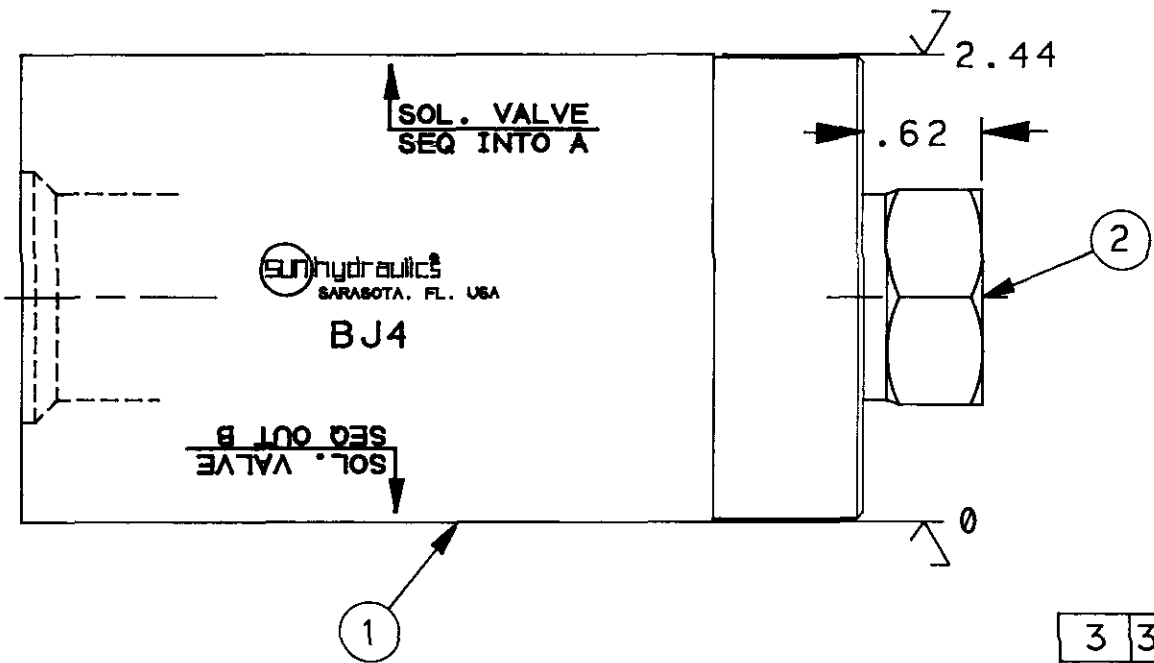

3	340-002	PIPE PLUG	1
2	CXED XAN	CHECK VALVE	1
1	150-714	BODY	1
ITEM	PART NO.	PART NAME	QTY

								UNLESS OTHERWISE SPECIFIED				TITLE 02H SANDWICH- W/REVERSE FF CHECK				REVISION A		PART NO. BJ4			
								DIMENSION TOL .x =±.030 .xx =±.015 .xxx=±.005				SCALE 1=1		REF. YSEJ LAN		MATERIALALUMINUM, STEEL & NOTED.					
								ANGLE TOL±½ FINISH 80✓ REMOVE ALL BURRS				DRAWN BR5		CHECK JLB		RELEASE 3211		HEAT TREAT & FINISH			
A REVISED STAMPING				7-7-92				BRS				3825						 SUN hydraulics® CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983			
LET REVISION				DATE				DRN CHK REL				DATE 7/30/91		DATE 8-1-91		DATE 8-5-91					