



NFPA D04 PATTERN
 .41 DIA THRU.
 TYP.(4) PLACES
 .28 DIA THRU
 TYP. (2) PLACES

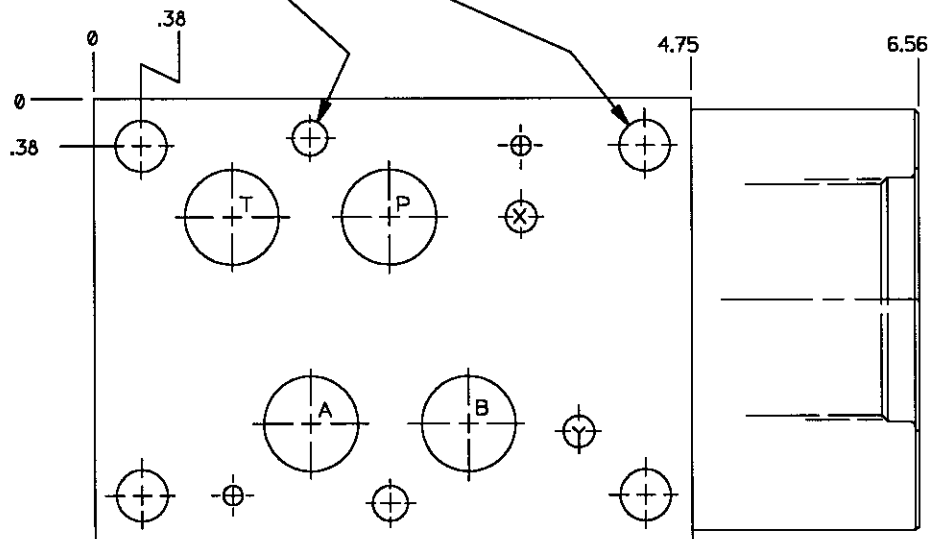

SYMBOL

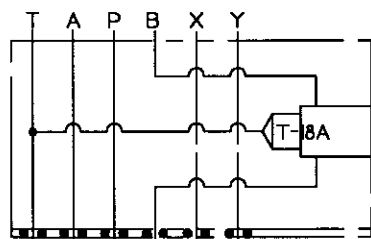


NOTES:

- 1) SEALS:BUNA-N.
- 2) ALUMINUM BODIES: 3000 PSI
MAXIMUM CONTINUOUS WORKING
PRESSURE.
- 3) ORDERING INFO:
CXJA XAN DK N

CARTRIDGE TO BE INSTALLED
 IN T-18A CAV. SEAL TYPE
 IN CXJA DETERMINES ITEM 3
 & 4 SEAL TYPE.

T-18A CAVITY
 .03 L.S.DEPTH

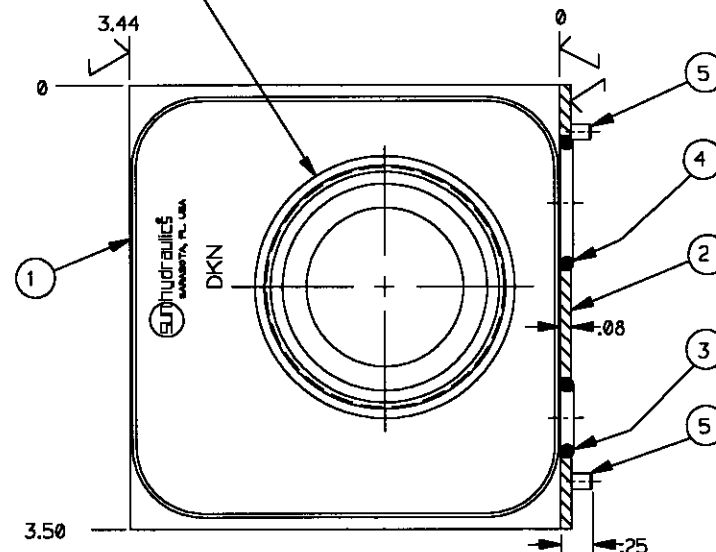

5	811-001-006	ROLL PIN	2
4	500- 001-118	O-RING	4
3	500- 001-111	O-RING	2
2	700-006	SEAL PLATE	1
1	153-146	BODY	1
PART NO.		PART NAME	QTY

OUTLINE & ASSEMBLY

TITLE ISO 07 SANDWICH BODY- T-18A CAVITY T → B				REVISION A		PART NO. DKN	
MATERIAL ALUM & NOTED				HEAT TREAT & FINISH			
SCALING 1=1				DATE 16AUG83			
DRAWN DAS				CHECK DATE 25AUG83			
RELEASE 4943				DATE 25AUG83			
UNLESS OTHERWISE SPECIFIED				REMOVE ALL BURRS			
DIMENSION TOL .X = ±0.30 .XX = ±01.5 XXX = ±0.05				ANGLE TOL ±1/4 FINISH 80 ✓			
A	CORRECTED POSITION OF THE CAVITY	27OCT88	JMK	NH			
LET	REVISION	DATE	DRN	CHK	REL		

SUN hydraulics
 CORPORATION
 791 TALLEYVAULT ROAD
 SARASOTA, FLORIDA 34243, USA
 TELEPHONE (813) 362-1300