

REVISION	PART NO.
A	EM*

SYMBOL

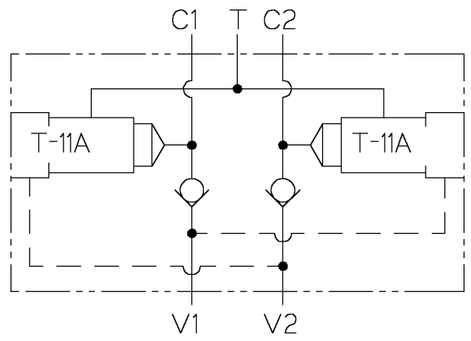

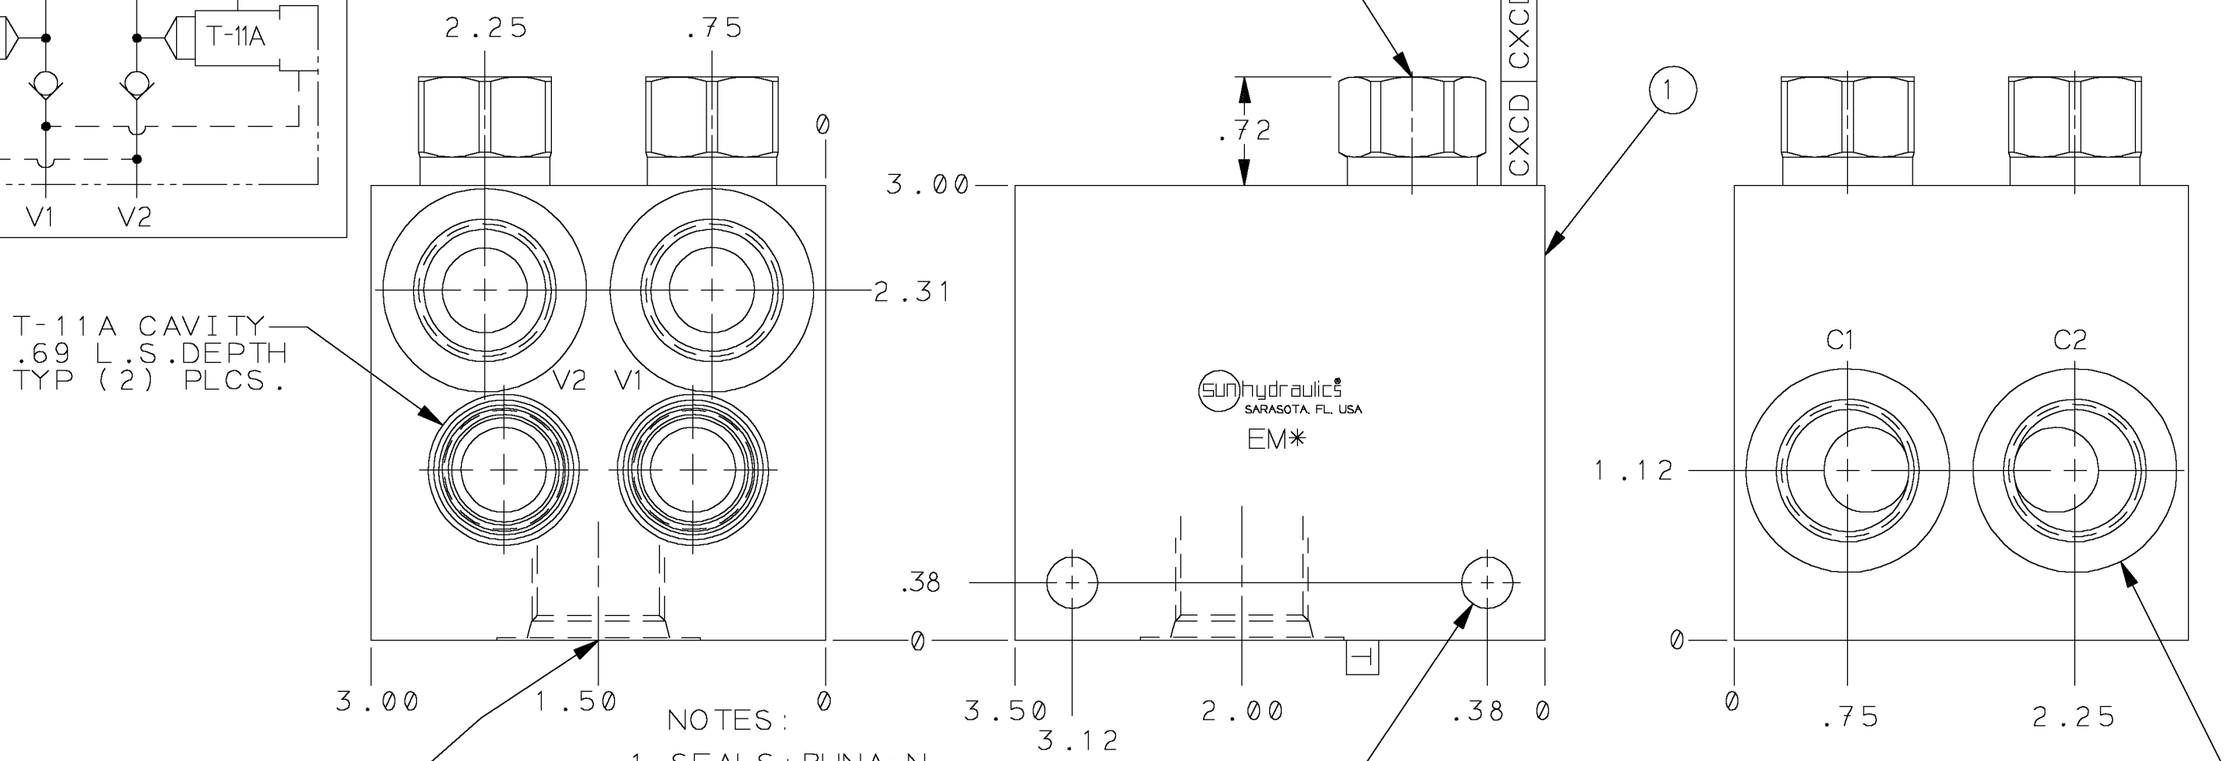

NOTES:

1. SEALS: BUNA-N
2. ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.
3. CXCD XCN CARTRIDGE:
   CRACKING PRESSURE: 30 PSI ±3
   CHECK SEAT: STEEL.
4. ORDERING INFO:
   CBCA LAN EM*
   - EM* — MAIN PORT DESIGNATION
   - LAN — CART. TO BE INSTALLED IN T-11A CAVITIES. SEAL TYPE IN CBCA DETERMINES ITEM 2 SEAL TYPE

PORT OPTIONS

MODEL NO.	PORTS C1, C2, V1 & V2	PORT T	BODY DASH NO. (ITEM 1)
EMB	.375-18 NPTF	.500-14 NPTF	-001
EMC	.500-14 NPTF	.500-14 NPTF	-002
EMJ	SAE-8	SAE-10	-003
EMK	SAE-10	SAE-10	-004
EMU	.375-19 BSPP	.500-14 BSPP	-005
EMV	.500-14 BSPP	.500-14 BSPP	-006

LET	REVISION	DATE	DRN	CHK	REL
A	SAE'S WERE SUN STANDARD REDRAWN IN CADD	01JUN98	DSS	DEB	8637

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
. x = ±.030
. xx = ±.015
. xxx = ±.005
ANGLE TOL ±½
FINISH 80 ✓
REMOVE ALL BURRS

OUTLINE & ASSEMBLY

ITEM	PART NO.	PART NAME	QTY
2	CXCD XCN	CHECK VALVE	2
1	150-587-***	BODY	1

TITLE: DUAL CUSHION/LOCK VALVE

REVISION	PART NO.
A	EM*

SCALE	REF.	MATERIAL
1/1	YCCD LAN	ALUM & STEEL

DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH
BRS	R/B	2761	
DATE 8-3-90	DATE 10-3-90	DATE 10-9-90	

sun hydraulics® CORPORATION
1500 WEST UNIVERSITY PKWY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (941) 362-1200