

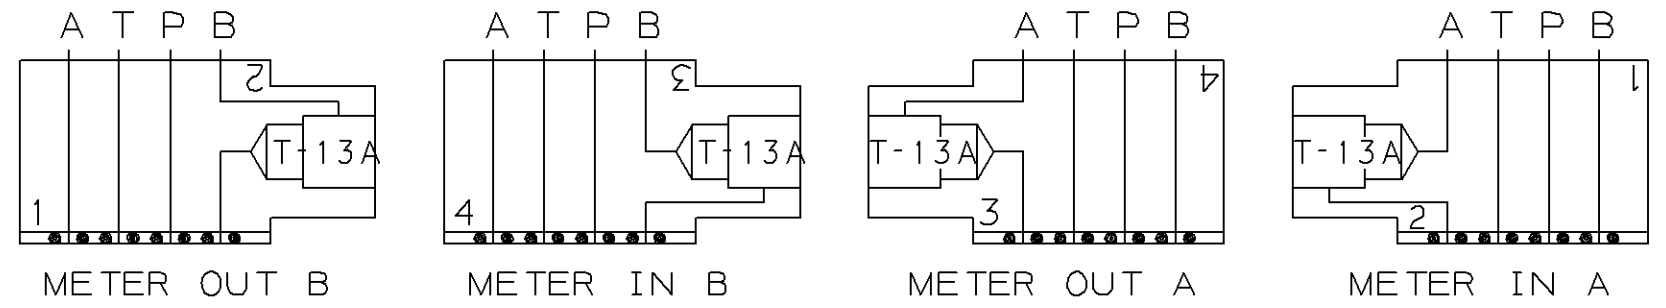
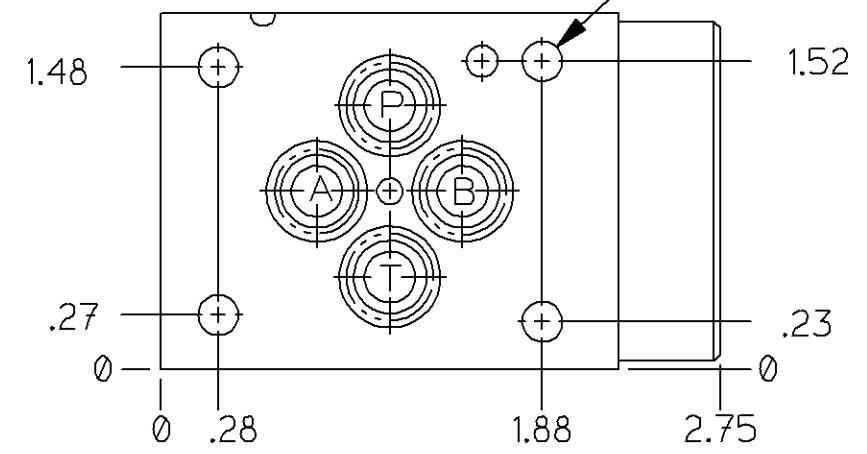
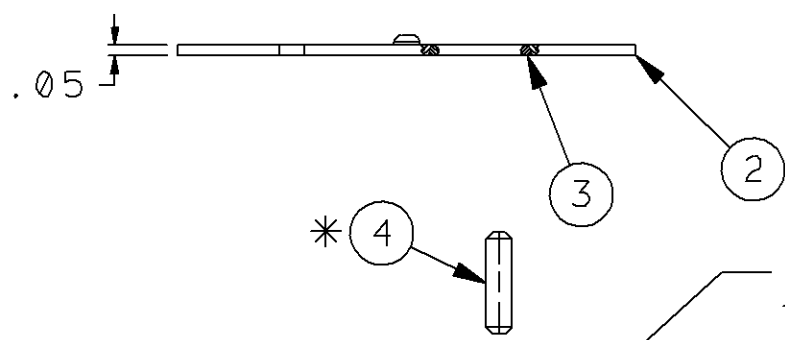
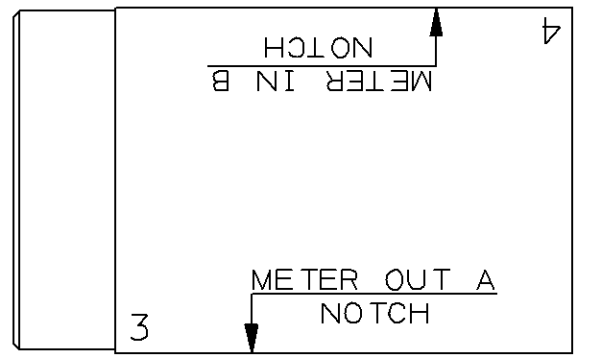


SYMBOLS

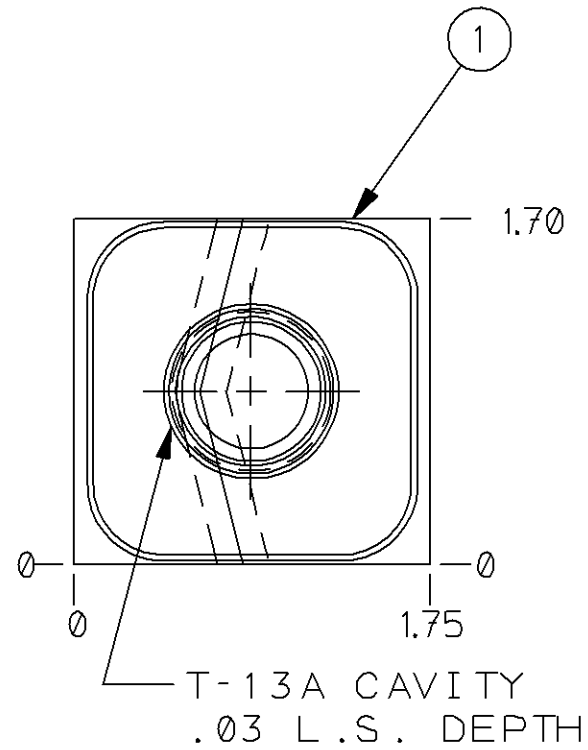

REVISION	PART NO.
D	GBA

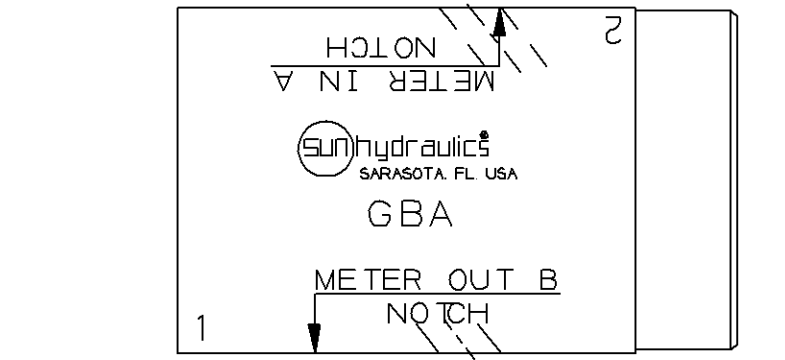

.20 DIA. MOUNTING HOLES
TYP (4) PLACES

NOTES :

- 1) SEALS: BUNA-N
- 2) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
- *3) CUSTOMER TO INSTALL LOCATING
PIN (ITEM 4) FOR FUNCTIONAL
ORIENTATION DESIRED.

ITEM	PART NO.	PART NAME	QTY
4	811-001-006	PIN	1
3	500-001-012	"O"RING	4
2	700-002	SEAL PLATE	1
1	150-296	BODY	1

OUTLINE & ASSEMBLY						REVISION	PART NO.
TITLE ISO 03 SANDWICH-A OR B PORT FLOW CONTROL 5 GPM						D	GBA
SCALE 1/1						MATERIAL STEEL & ALUMINUM	
DRAWN RJC						HEAT TREAT & FINISH	
DATE 5-19-78						DATE 11-10-78	
UNLESS OTHERWISE SPECIFIED						SUN hydraulic CORPORATION 1500 WEST UNIVERSITY PKWY SARASOTA, FLORIDA 34243, USA TELEPHONE (941) 362-1200	
DIMENSION TOL							
.x = ±.030							
.xx = ±.015							
.xxx = ±.005							
ANGLE TOL ± 1/2							
FINISH 80V							
REMOVE ALL BURRS							
CORRECTED ANGLE ON .250 HOLES TO SHOW BETTER HIT IN CAVITY							
REVISED STAMPING.							
ADDED ITEM 4 AND NOTE 3.							
REDRAWN ON CADD, SEALS WERE VITON							
REVISION							
DATE							
DRN							
CHK							
REL							