

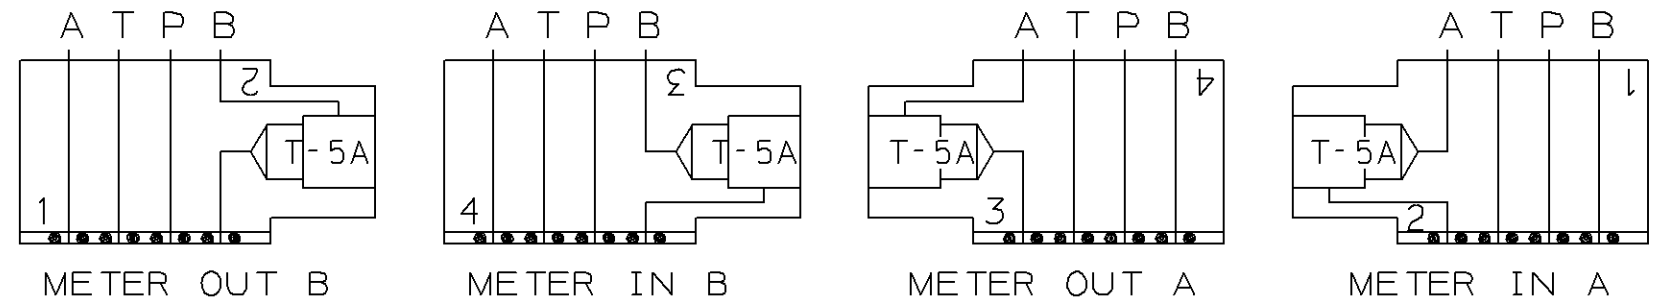
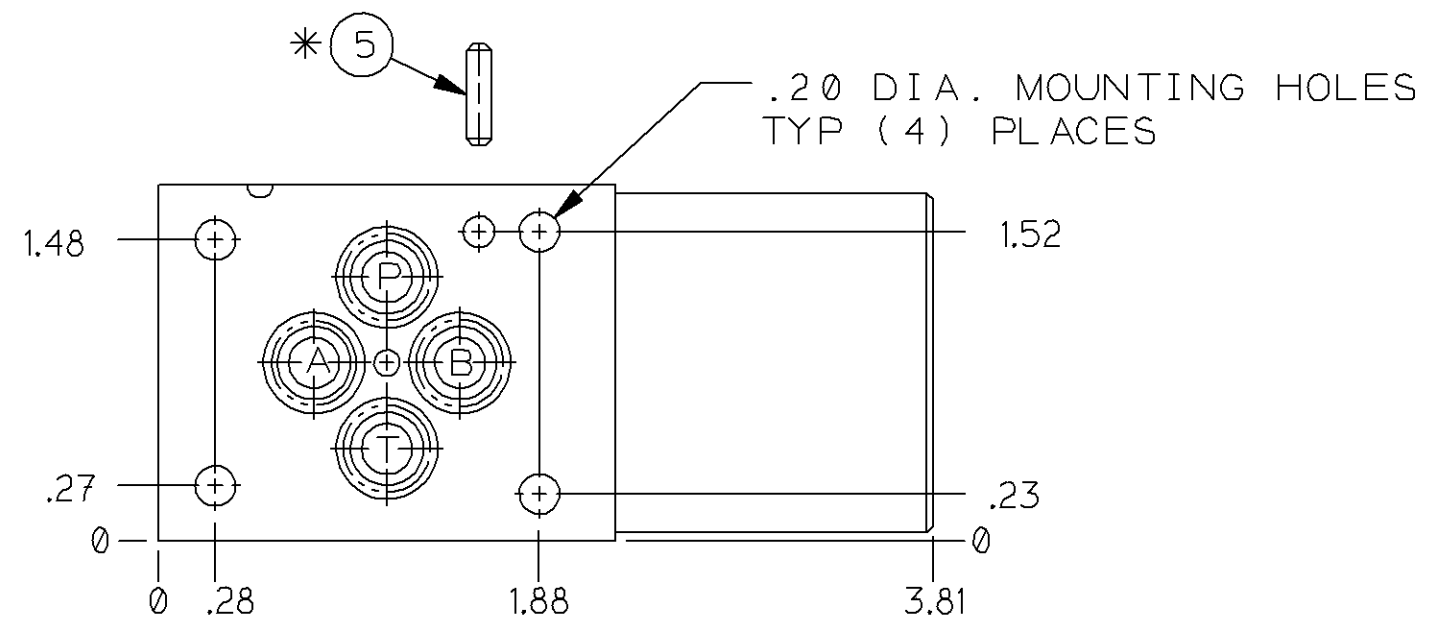
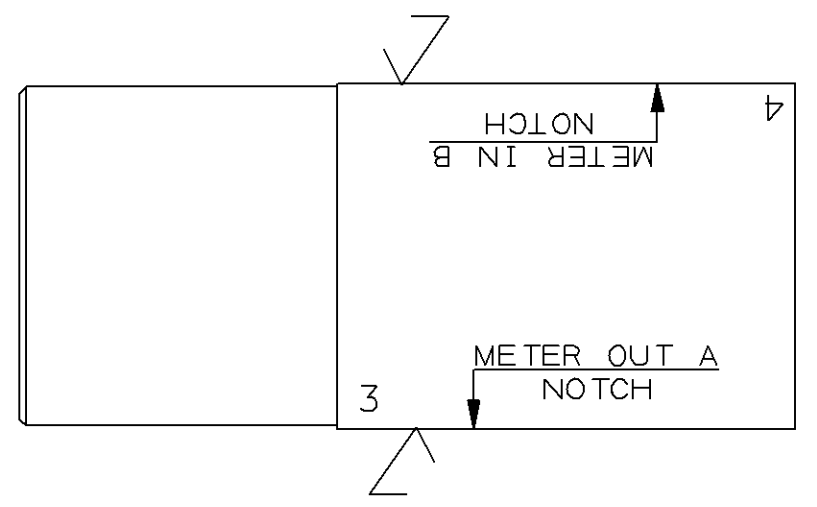


SYMBOLS

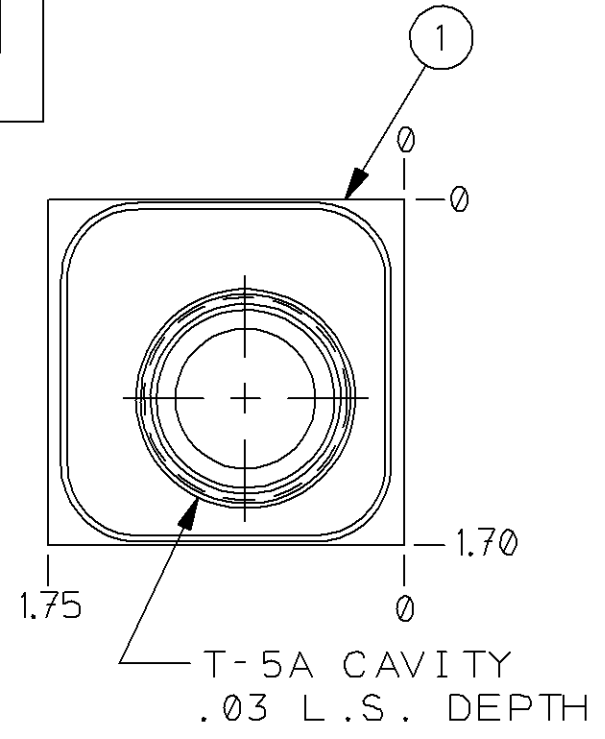

REVISION D PART NO. GBD

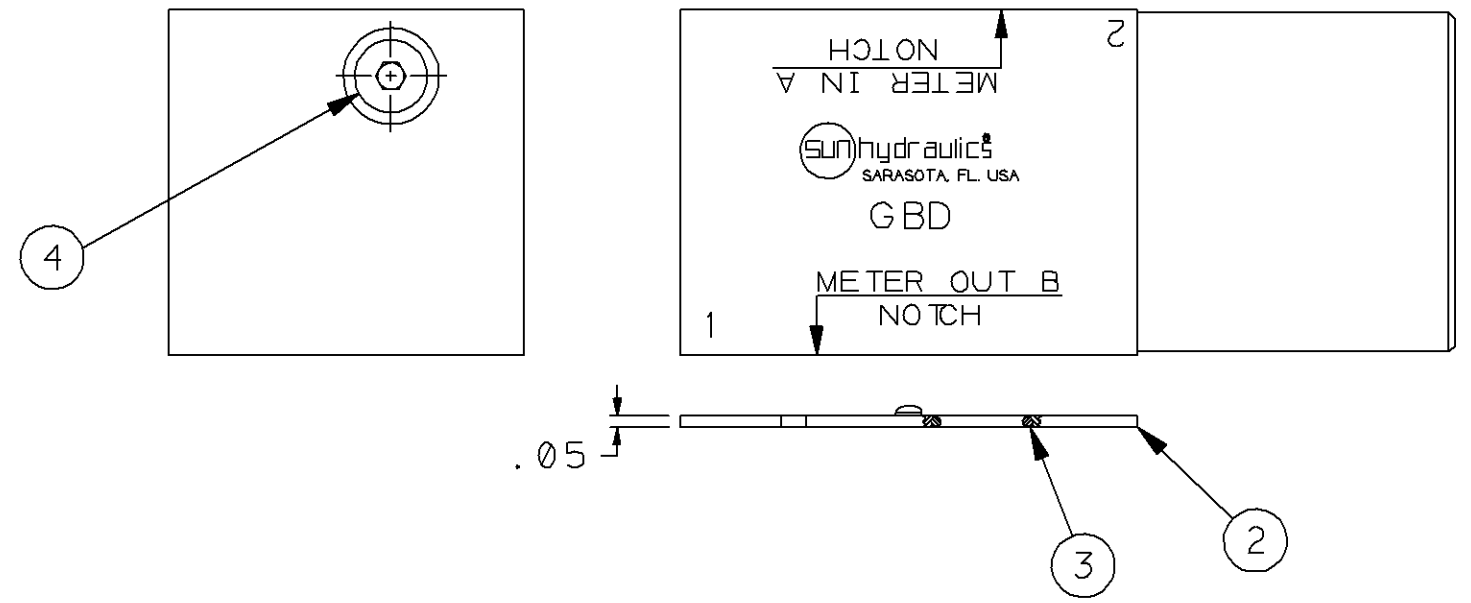

NOTES :
1) SEALS: BUNA-N
2) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
*3) CUSTOMER TO INSTALL LOCATING
PIN (ITEM 5) FOR FUNCTIONAL
ORIENTATION DESIRED.

ITEM	* 5	811-001-006	PIN	1
	4	A330 006 002	SAE-2 HEX BOSS "O" RING PLUG	1
	3	500-001-012	"O" RING	4
	2	700-002	SEAL PLATE	1
	1	151-613	BODY	1
		PART NO.	PART NAME	QTY

UNLESS OTHERWISE SPECIFIED				
DIMENSION TOL				
.x = ±.030				
.xx = ±.015				
.xxx = ±.005				
ANGLE TOL ± 1/2				
FINISH 80V				
REMOVE ALL BURRS				

D	ADDED SAE-2 VIEW IT#4 WAS A KOENIG	08NOV00	SMS	DSS	10121
C	REVISED STAMPING.	28 OCT92	BRS		4080
B	ADDED ITEM 5 AND NOTE 3.	3-12-92	BRS	RJC	3577
A	REDRAWN ON CADD, SEALS WERE VITON	2-28-92	BRS	RJE	3547
LET	REVISION	DATE	DRN	CHK	REL

OUTLINE & ASSEMBLY

TITLE ISO 03 SANDWICH-T-5A
CAVITY METER IN OR OUT A OR B

SCALE 1/1 REF.

DRAWN DAS CHECK JLB RELEASE 1359

DATE 5-7-87 DATE 5-8-87 DATE 5-8-87

MATERIAL STEEL & ALUMINUM

HEAT TREAT & FINISH

REVISION D PART NO. GBD