

CHART 'A'. PORT OPTIONS.					
MODEL NUMBER	PORTS 1 & 2.	PORT 3	PORT G	BODY DASH NO (ITEM 1)	MTG HOLES
J2A	.250-18 NPTF	.250-18 NPTF	.250-18 NPTF	-001	INCH
J2B	.375-18 NPTF	.250-18 NPTF	.250-18 NPTF	-002	INCH
J2H	SAE-4	SAE-4	.250-18 NPTF	-003	INCH
J2I	SAE-6	SAE-4	.250-18 NPTF	-004	INCH
J2T	.250-19 BSPP	.250-19 BSPP	.250-19 BSPP	-005	METRIC
J2U	.375-19 BSPP	.250-19 BSPP	.250-19 BSPP	-006	METRIC

- NOTES:
- 1) SEALS MATERIAL, BUNA-N.
 - 2) SEE CHART 'A' FOR OPTIONS.
 - 3) CXAD-XCN CARTRIDGE, CRACKING PRESSURE 2 BAR.
 - 4) mm DIM'S IN BRACKETS.
 - 5) TYPICAL ORDERING INFO :

PBBB LAN

*** NO SUFFIX

*** /S

BODY MATERIALS.

DENOTES ALUMINIUM BODY

DENOTES DUCTILE IRON BODY



DENOTES PORT OPTIONS. SEE CHART - BODY DASH No.

DENOTES BUNA-N
V DENOTES VITON.

CUSTOMERS CHOICE OF "0" SERIES CARTRIDGE SELECTED FOR

*T-163A CAVITY

THE SEAL TYPE IN THIS VALVE DETERMINES THE SEAL TYPE IN CHECK VALVE (ITEM # 2)

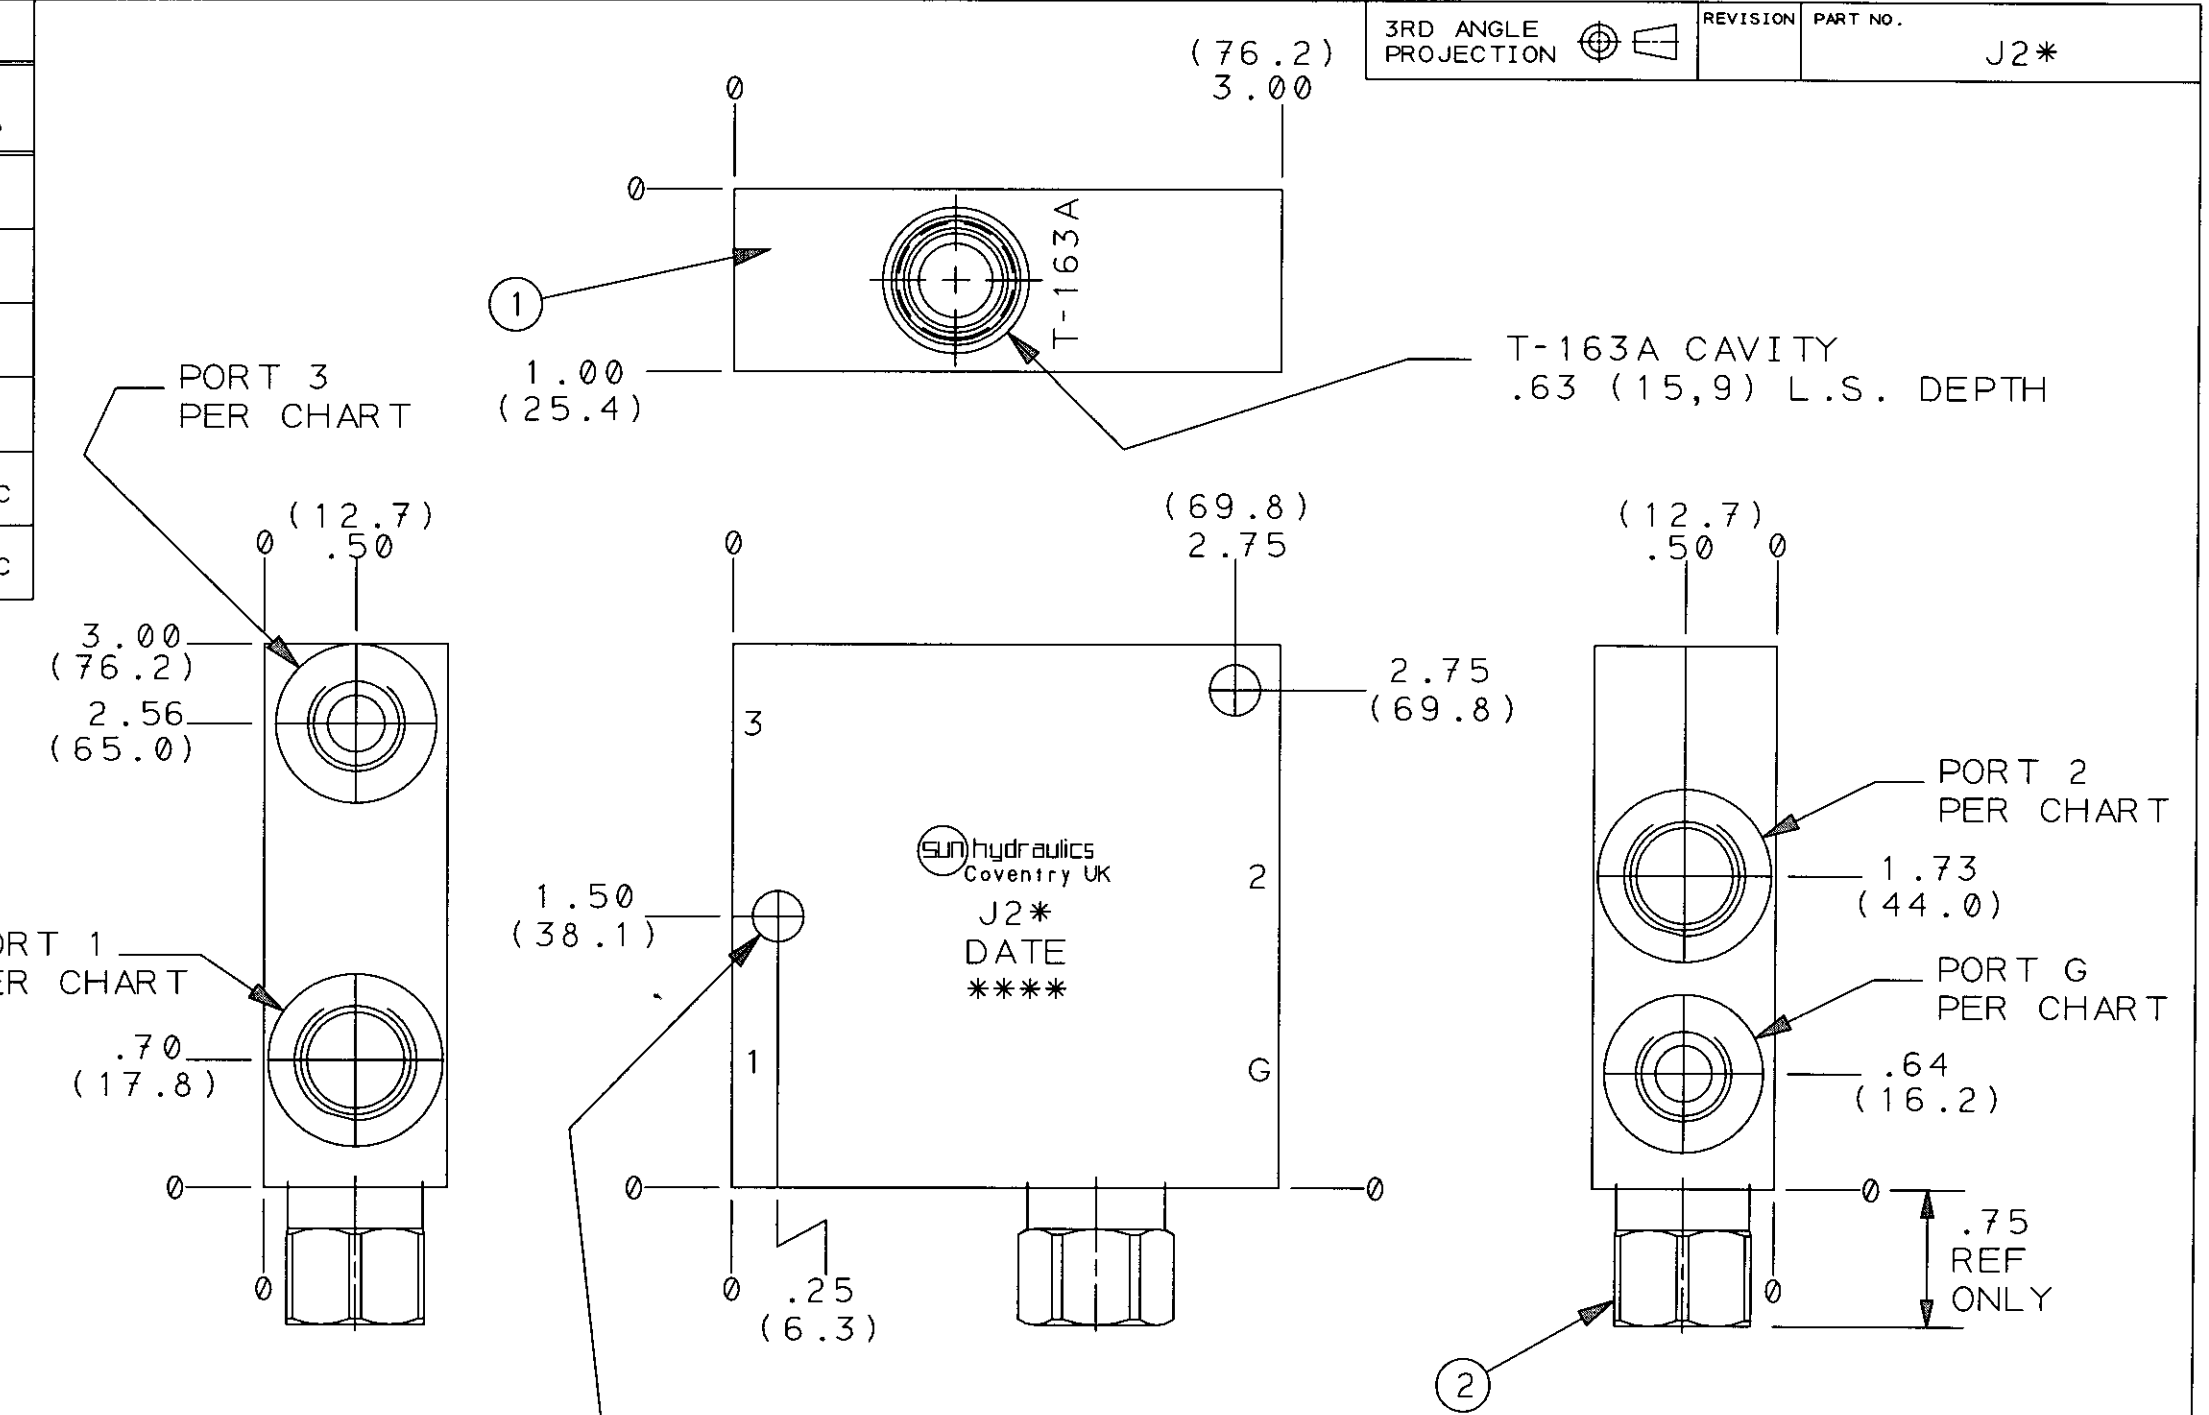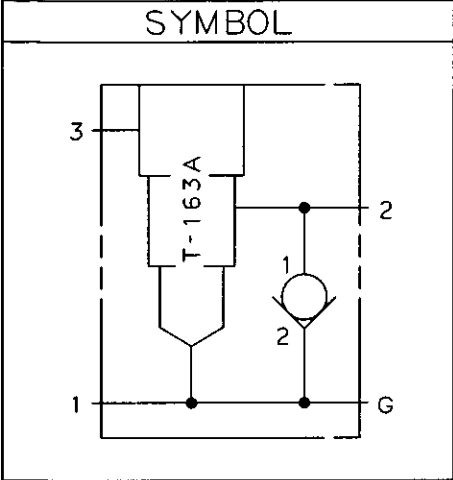


MOUNTING PROVISIONS:

TYP (2) PLACES.

INCH - .281 (7,1) DIA HOLES THRU

METRIC - .268 (6,8) DIA HOLES THRO.

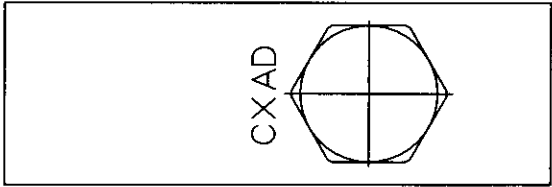

OUTLINE & ASS'Y						TITLE		REVISION		PART NO.	
UNLESS OTHERWISE SPECIFIED						T-163A CAVITY WITH REVERSE FREE FLOW CHECK				J2*	
DIMENSION TOL						CADD SCALE		REF.		MATERIAL	
.x = ±.030						1:*		CATALOGUE		ALUMINIUM	
.xx = ±.015						DRAWN MJ		CHECK GH		HEAT TREAT & FINISH	
.xxx = ±.005						DATE		DATE		DATE	
ANGLE TOL ±%						19 AUG 97		02 SEP 97			
FINISH 80✓											
REMOVE ALL BURRS											
LET	REVISION					DATE	DRN	CHK	REL		

SUN

hydraulics

LIMITED

WHEELER ROAD, WHITLEY, COVENTRY, CV3 4LA ENGLAND

TELEPHONE (01203) 307696