



CHART 'A'. PORT OPTIONS.					
MODEL NUMBER	PORTS 1 & 2.	PORT 3	PORT G	BODY DASH NO (ITEM 1)	MTG HOLES
J6A	.250-18 NPTF	.250-18 NPTF	.250-18 NPTF	-001	INCH
J6B	.375-18 NPTF	.250-18 NPTF	.250-18 NPTF	-002	INCH
J6H	SAE-4	SAE-4	.250-18 NPTF	-003	INCH
J6I	SAE-6	SAE-4	.250-18 NPTF	-004	INCH
J6T	.250-19 BSPP	.250-19 BSPP	.250-19 BSPP	-005	METRIC
J6U	.375-19 BSPP	.250-19 BSPP	.250-19 BSPP	-006	METRIC

- NOTES:
- 1) SEALS MATERIAL, BUNA-N.
 - 2) SEE CHART 'A' FOR OPTIONS.
 - 3) CXBA-XCN CARTRIDGE, CRACKING PRESSURE 2 BAR.
 - 4) mm DIM'S IN BRACKETS.
 - 5) TYPICAL ORDERING INFO :

BODY MATERIALS.	
RSBC LAN *** NO SUFFIX	DENOTES ALUMINIUM BODY
*** /S	DENOTES DUCTILE IRON BODY
	DENOTES PORT OPTIONS. SEE CHART - BODY DASH No.
	DENOTES BUNA-N V DENOTES VITON.
	CUSTOMERS CHOICE OF "0" SERIES CARTRIDGE SELECTED FOR
	*T-163A CAVITY
	THE SEAL TYPE IN THIS VALVE DETERMINES THE SEAL TYPE IN CHECK VALVE (ITEM # 2)



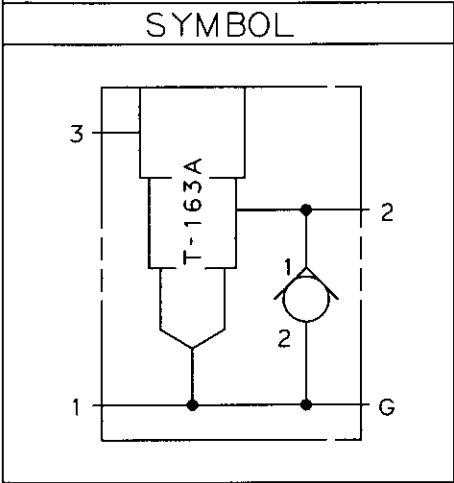


PORT 3
PER CHART

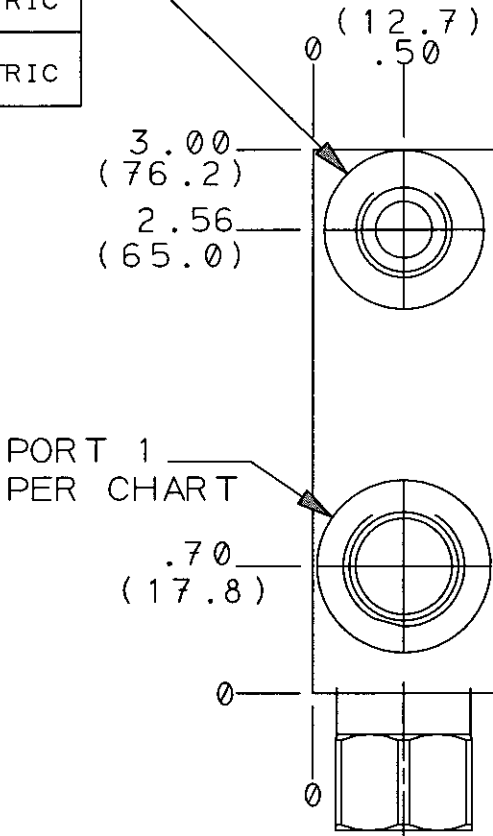

PORT 1
PER CHART

MOUNTING PROVISIONS:
TYP (2) PLACES.
INCH -
.281 (7,1) DIA HOLES THRU
METRIC -
.268 (6,8) DIA HOLES THRO.

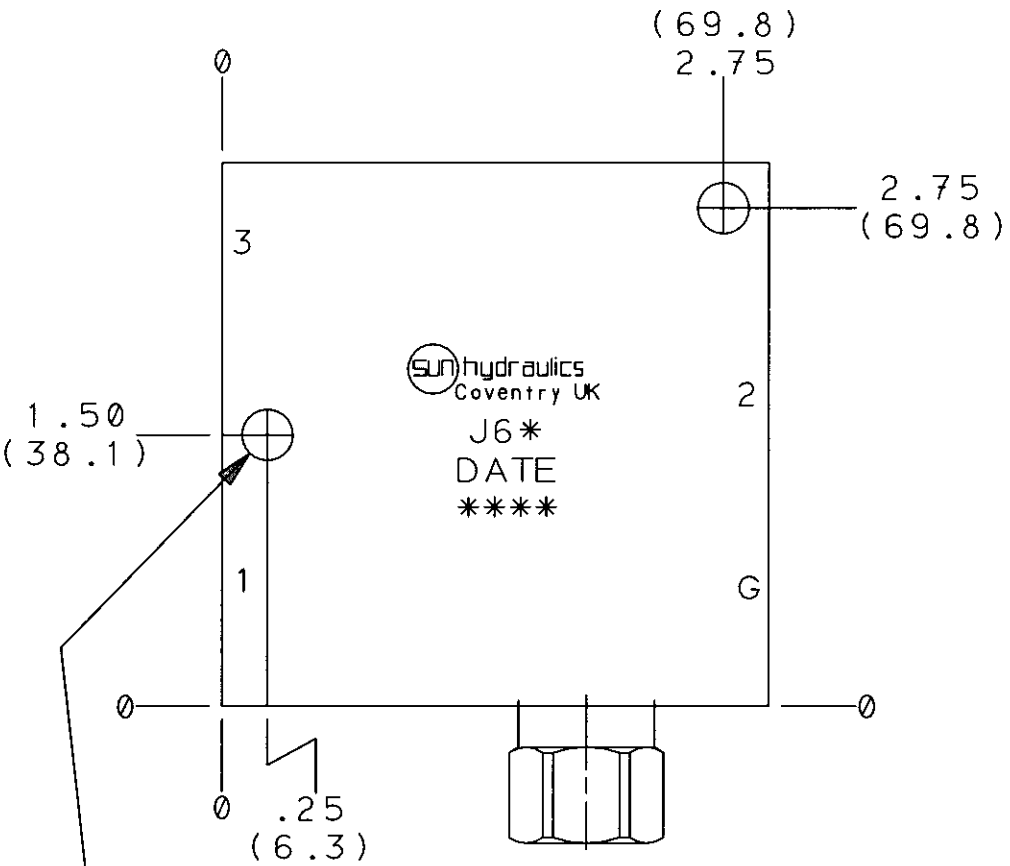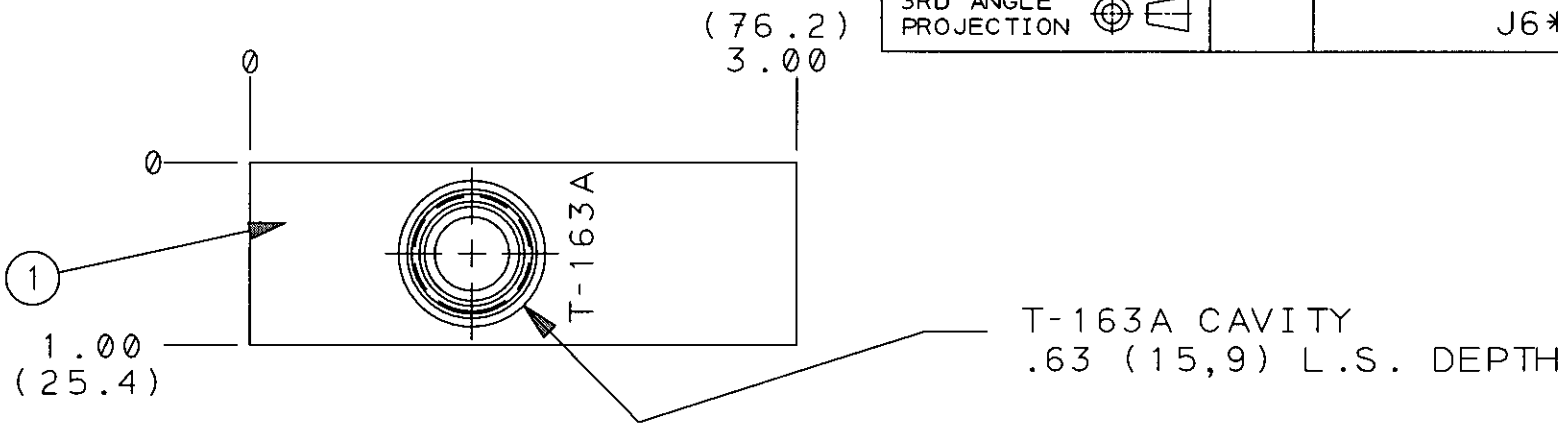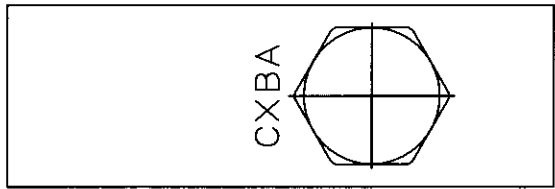

PORT 2
PER CHART

1.73
(44.0)

PORT G
PER CHART

.64
(16.2)

.75
REF ONLY

3RD ANGLE PROJECTION	REVISION	PART NO.
		J6*

2	CXBA-XCN	CHECK CARTRIDGE	1
1	158-481-*** (SEE CHART)	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE & ASS'Y				REVISION	PART NO.
UNLESS OTHERWISE SPECIFIED					J6*
TITLE T-163A CAVITY WITH REVERSE FREE FLOW CHECK					
DIMENSION TOL .x = ±.030 .xx = ±.015 .xxx = ±.005 ANGLE TOL ±1/2° FINISH 60V REMOVE ALL BURRS					
CADD SCALE 1:1					
REF. CATALOGUE					
MATERIAL ALUMINIUM					
HEAT TREAT & FINISH					
DRAWN MJ CHECK GH RELEASE					
DATE 19 AUG 97 DATE 02 SEP 97					
LET	REVISION	DATE	DRN CHK REL		

