REVISION	PART NO.
B	N4*

SYMBOL

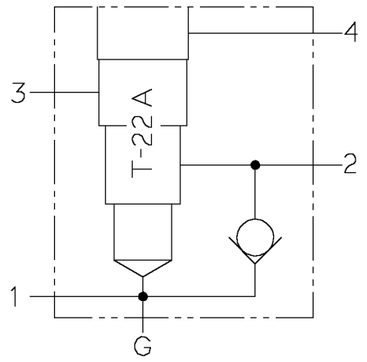

NOTES:
1) SEALS: BUNA-N
2) ALUMINUM BODIES-3000 MAXIMUM CONTINUOUS SERVICE PRESSURE.
3) CXED XCN CARTRIDGE:
CRACKING PRESSURE: 30 PSI ± 3
CHECK SEAT : STEEL

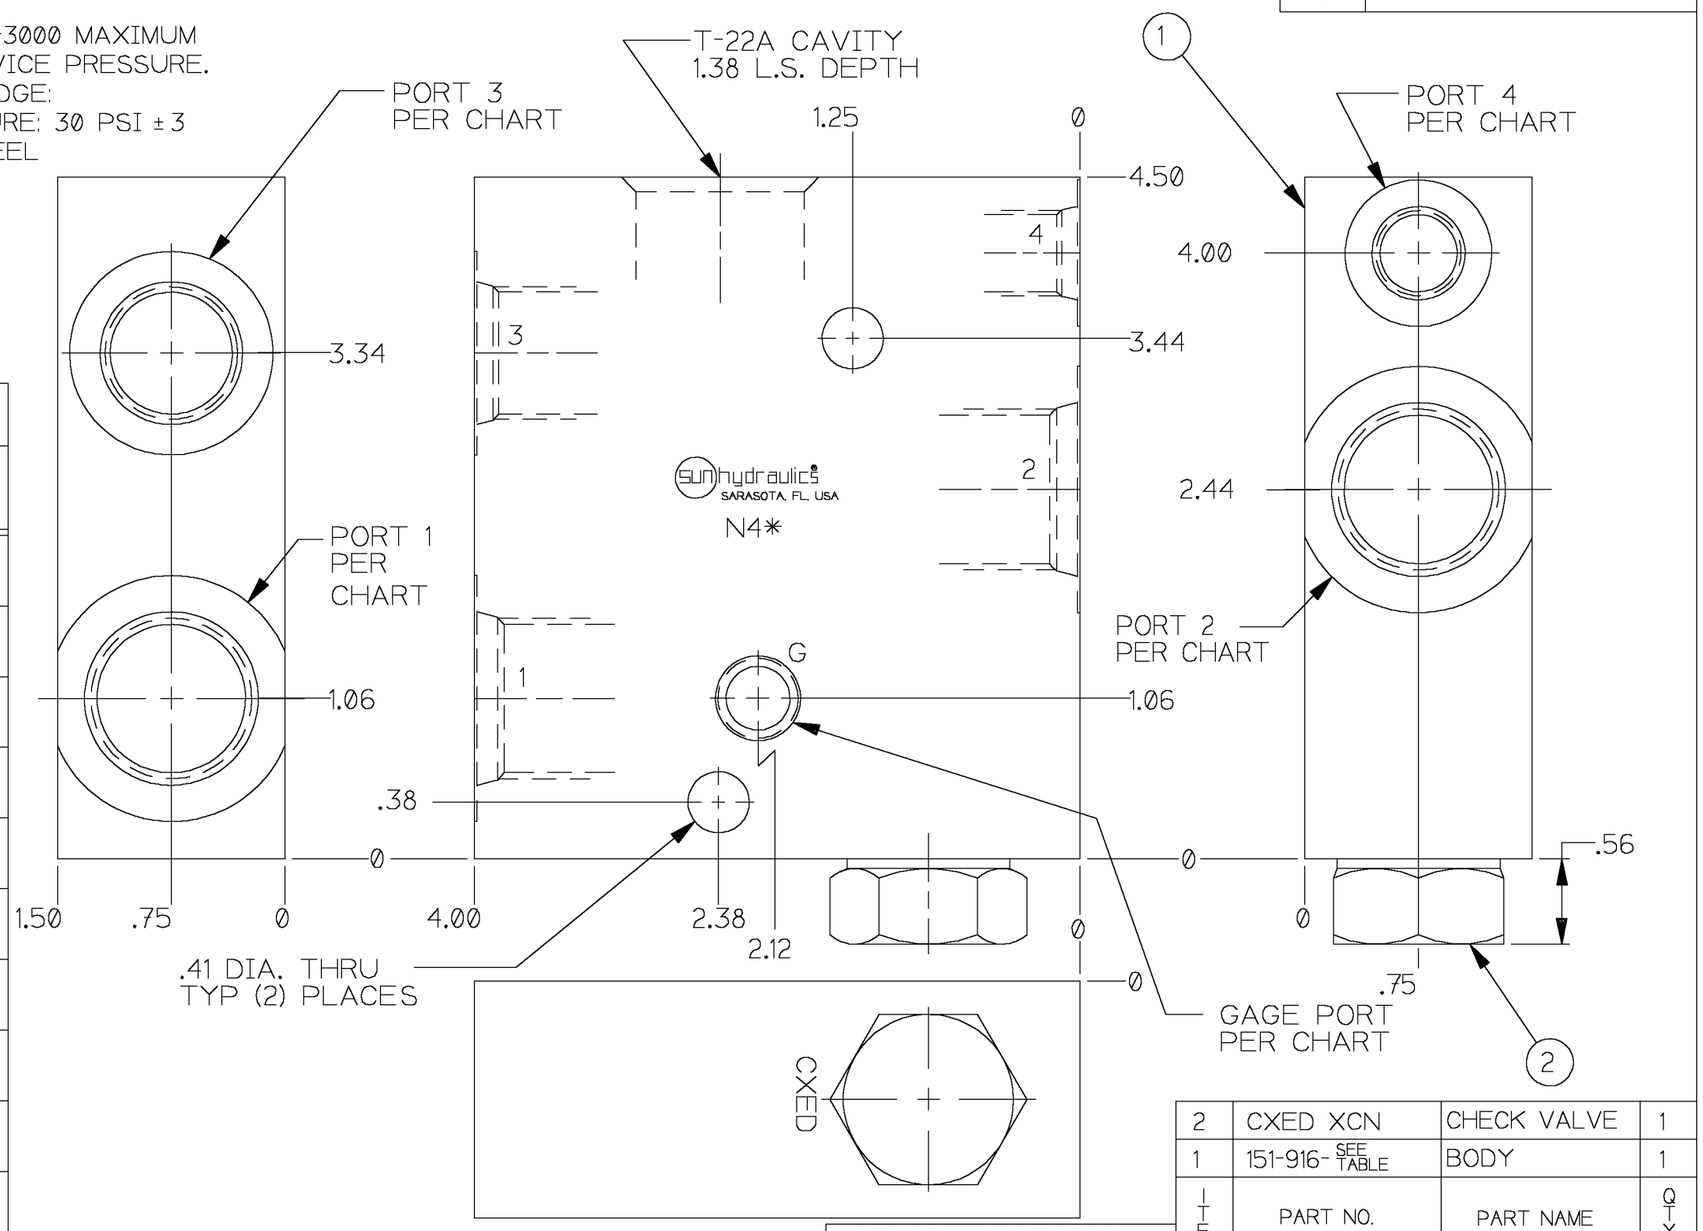

CHART A (PORT OPTIONS)

MODEL NUMBER	PORT G	PORTS 1 & 2	PORT 3	PORT 4	BODY DASH NO ITEM 1
N4A	.250-18 NPTF	.250 -18 NPTF	.250 -18 NPTF	.250 -18 NPTF	-001
N4B	.250-18 NPTF	.375-18 NPTF	.375-18 NPTF	.250 -18 NPTF	-002
N4C	.250-18 NPTF	.500-14 NPTF	.500-14 NPTF	.250-18 NPTF	-003
N4D	.250-18 NPTF	.750 -14 NPTF	.500-14 NPTF	.250-18 NPTF	-004
N4I	.250-18 NPTF	SAE- 6	SAE- 6	SAE-6	-005
N4J	.250-19 NPTF	SAE- 8	SAE- 8	SAE-6	-006
N4K	.250-19 BSPP	SAE- 10	SAE-10	SAE-6	-007
N4L	.250-19 BSPP	SAE- 12	SAE-10	SAE-6	-008
N4T	.250-19 BSPP	.250-19 BSPP	.250 -19 BSPP	.250-19 BSPP	-009
N4U	.250-19 BSPP	.375 -19 BSPP	.375 -19 BSPP	.250-19 BSPP	- 010
N4V	.250-19 BSPP	.500-14 BSPP	.500-14 BSPP	.250-19 BSPP	-011
N4W	.250-19 BSPP	.750-14 BSPP	.500-14 BSPP	.250-19 BSPP	-012

ITEM	PART NO.	PART NAME	QTY
2	CXED XCN	CHECK VALVE	1
1	151-916- SEE TABLE	BODY	1

OUTLINE & ASSEMBLY

LET	REVISION	DATE	DRN	CHK	REL
B	SAES WERE SUN STD	03DEC97	DSS	DEB	8341
A	REPOSITIONED CXED STAMPING.	30NOV94	BRS		2847

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
. x = ±.030
. xx = ±.015
. xxx = ±.005
ANGLE TOL ±½
FINISH 80 ✓
REMOVE ALL BURRS

TITLE: T-22A CAV. W/FF CHECK-USE W/REDUCING/RELIEVING VALVE

SCALE	REF.	MATERIAL
1/1		ALUMINUM

DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH
BRS	DAS	2847	
DATE 10-25-90	DATE	DATE 12-26-90	

REVISION	PART NO.
B	N4*

sun hydraulics CORPORATION
701 TALLEVAST ROAD
SARASOTA, FLORIDA 34243, USA
TELEPHONE (941) 362-1300