

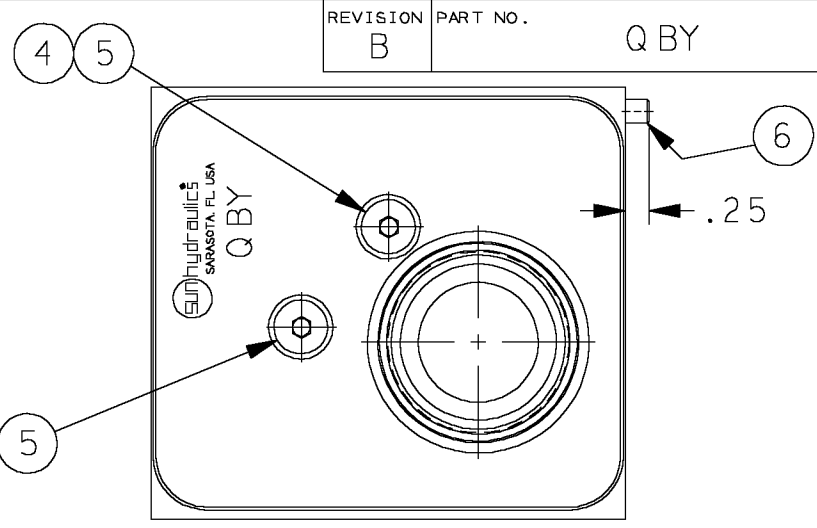


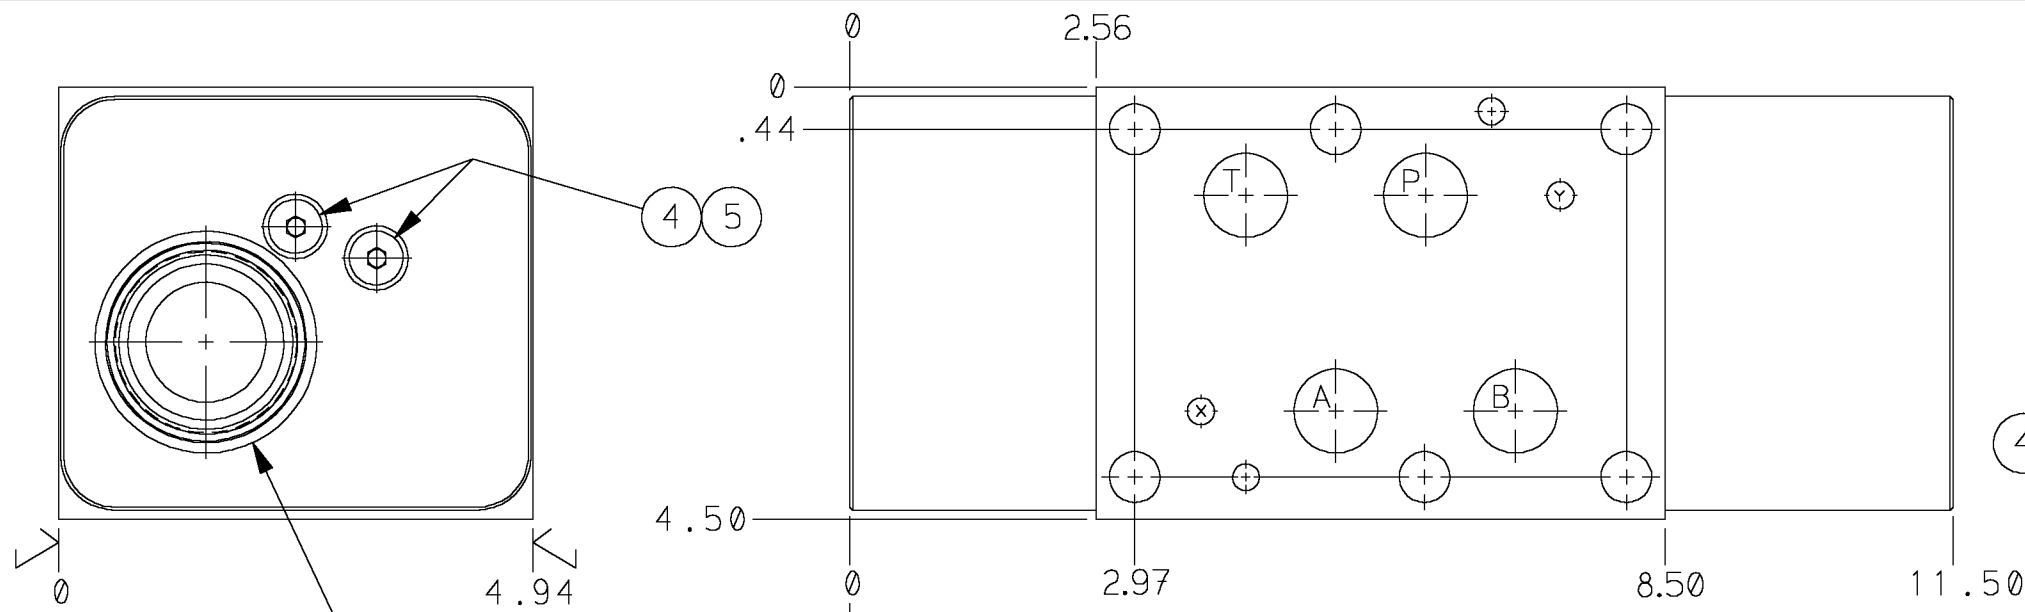


T-24A CAVITY
2.00 L.S. DEPTH
TYP BOTH ENDS

- NOTES :
- 1) SEALS: BUNA-N
 - 2) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.

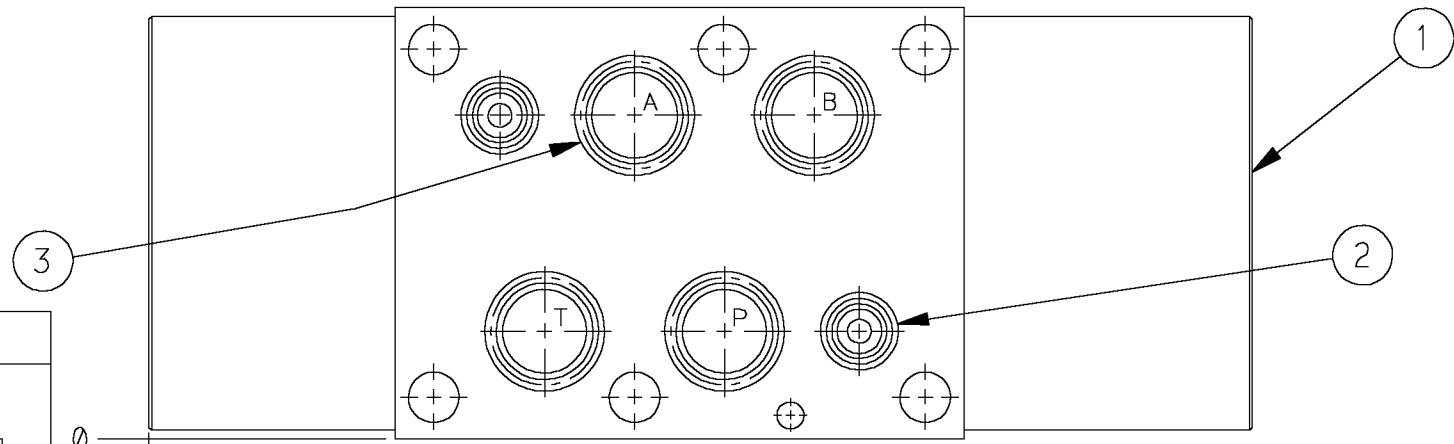

6	811-001-002	ROLL PIN	1
5	330-006-004	PLUG	4
4	500-002-904	"O"RING	4
3	500-001-121	"O"RING	4
2	500-001-114	"O"RING	2
1	153-356	BODY	1
ITEM	PART NO.	PART NAME	QTY

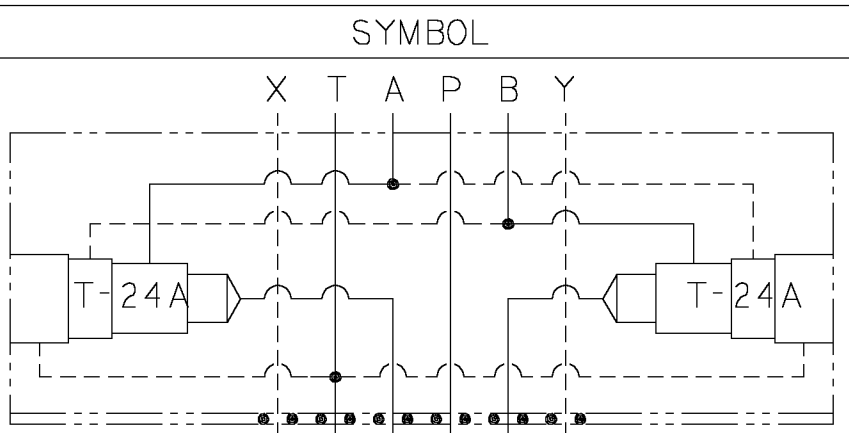

B	CHANGED BOSS LENGTHS. 8.50 WAS 8.25. 2.56 WAS 2.31. 2.97 WAS 2.72.	23 JUL 94	RJB		5877
A	4.94 DIM. WAS 3.44	19 JAN 94	DAS		5306
LET	REVISION	DATE	DRN	CHK	REL

OUTLINE & ASSEMBLY

TITLE ISO 08 DUAL CROSS-PORTED T-24A CAVITIES

SCALE 1 / 2

DRAWN DATE 04NOV93

CHECK DATE

RELEASE DATE

MATERIAL ALUMINUM & NOTED

HEAT TREAT & FINISH

REVISION B

PART NO. Q BY



SUN hydraulics CORPORATION
1500 WEST UNIVERSITY PKWY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (941) 362-1200