



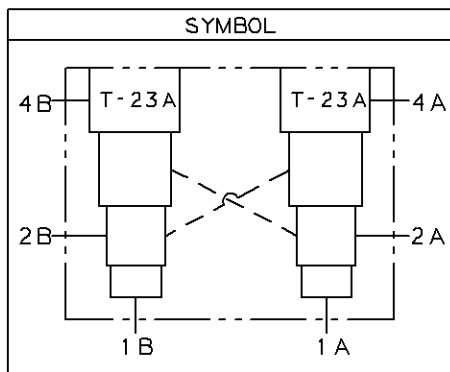





T-23A CAVITY
1.62 L.S. DEPTH
TYP (2) PLACES

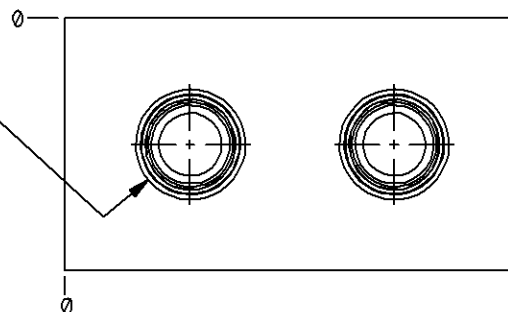

REVISION		PART NO.	
		VA5	
MODEL NO.	BODY DASH NO.	PORTS 4A & 4B	FLANGE TH'D TYPE
VA5	-001	SAE-6	INCH
VA5/M	-002	.250-19 BSPP	METRIC

PORTS 4A & 4B
PER CHART

1.25 SAE CODE-62
4 BOLT FLANGE
PATTERN (4) PLACES
INCH: .500-13UNC x
1.00 DP.
METRIC: M14 x 2.0-6H
x 1.00 DP.
TYP (16) PLACES

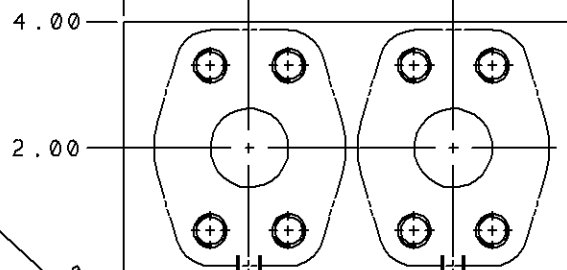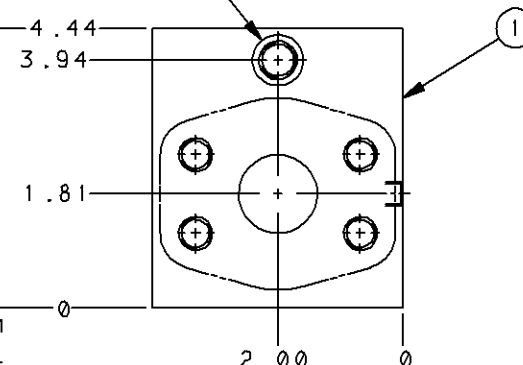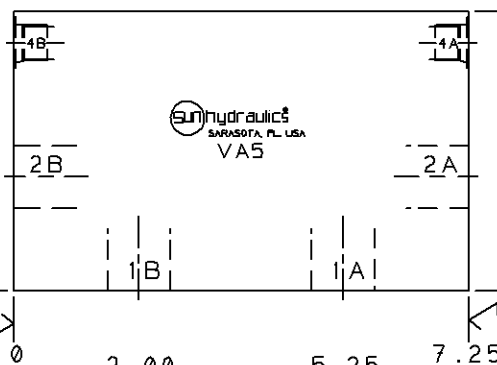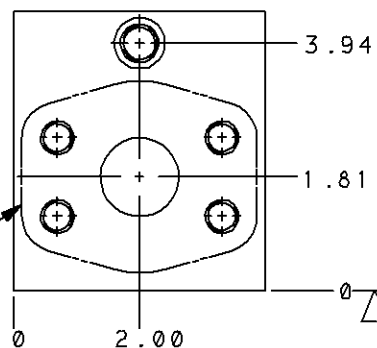

INCH: .375-16UNC x
.62 DP.
METRIC: M10 x 1.5-6H
x .62 DP.
TYP (2) PLACES

NOTES:

1) ALUMINUM BODIES -
3000 PSI MAX.
CONTINUOUS SERVICE
PRESSURE.

ITEM	1	152-253 SEE CHRT	BODY	1
		PART NO.	PART NAME	QTY

				UNLESS OTHERWISE SPECIFIED		TITLE DUAL CROSS-PILOTED T-23A CAVITIES W/INDEPENDENT #4 PORTS-1.25 CODE-62		REVISION		PART NO. VA5	
				DIMENSION TOL.		SCALE REF.		MATERIAL		 SUN hydraulics [®] CORPORATION 599 WEST UNIVERSITY PKWY SARASOTA, FLORIDA 34243, USA TELEPHONE (941) 362-1288	
				.X ±.030		1 = 2		ALUMINUM			
				.XX ±.015		DRAWN		CHECK			
				.XXX ±.005		BR5		RELEASE			
				ANGLE TOL ±				HEAT TREAT & FINISH			
				FINISH 80/V		DATE		DATE			
				REMOVE ALL BURRS		11/21/89		DATE			
LET	REVISION	DATE	DRN	CHK	REL						